



The CMS38606P is an indoor broadband low PIM omnidirectional ceiling mount antenna. It is designed to provide pattern coverage that is optimized for indoor requirements at 380-520 MHz, 600-960 MHz, 1395-1435 MHz, and 1690-6000 MHz frequency bands. The antenna features a pattern that is specifically shaped to provide optimal performance from a ceiling mount location.

FEATURES AND BENEFITS

- Low profile aesthetically-neutral housing
- Mounts directly and easily to ceiling tile
- Excellent flame retardancy rating
- IP67 rated ingress protection and RoHS compliant
- Broadband product with provision for the UHF, 600 MHz, 1390-1432 MHz, and AWS-3 bands in a single solution
- Low PIM performance minimizes interference and improves in-building wireless network coverage and capacity
- Attractive, compact design and form factor ideal for indoor solution applications
- In-building IFC and NFPA regulation compliant

APPLICATIONS

- FirstNet/Public Safety
- In-building wireless
- Neutral host providers
- Cellular and LTE
- Small cells

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	380-520	600-806	806-960	1395-1435	1690-2200	2200-4300	4300-6000
Peak Gain, dBi (Typ)	2.2	2.1	2.6	5.3	5.7	5.8	5.4
Peak Gain, dBi (Max)	3.1	2.7	2.9	5.4	6.1	7.0	6.1
VSWR – Avg	<2.8:1	<1.7:1	<1.9:1	<1.4:1	<1.6:1	<1.9:1	<1.6:1
VSWR – Max	<3.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1
PIM, 3rd Order, 2 x 20W, dBc (Typ)	<-154	<-154		NA	<-152		
PIM, 3rd Order, 2 x 20W, dBc (Max)	<-150	<-150		NA	<-150		
Nominal Impedance (Ohms)	50						
Max Power - Ambient 25°C (W)	50						
Polarization	Vertical						
Azimuth Beam Width	360°, Omnidirectional						

MECHANICAL SPECIFICATIONS

Dimensions – mm (inches)	133 x 298 (5.23 x 11.7)
Weight – kg (lbs.)	0.8 (1.76)
Radome Material	PC, UV Stable, UL94-V0 Material
Antenna Color	White

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature - C (°F)	-30° to +70° C (-22° to +158° F)
Storage Temperature – C (°F)	-40° to +85° C (-40° to 185° F)
Ingress Protection Rating	IP67
Material Substance Compliance	RoHS

CONFIGURATION


PART NUMBER	CABLE LENGTH	CONNECTOR
CMS38606P-30NF	30 cm (12 in.)	Type N Female
CMS38606P-30D43F	30 cm (12 in.)	4.3-10 Female

RADIATION PATTERNS


400 MHz

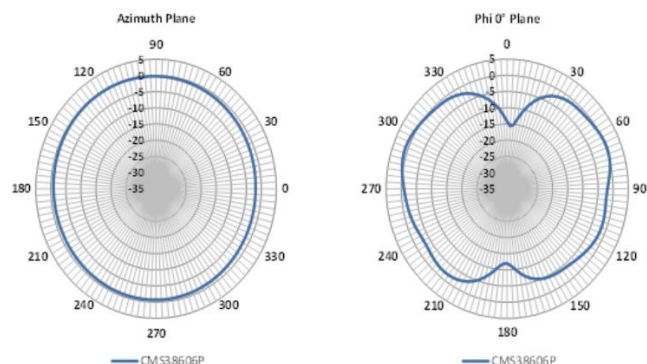


520 MHz

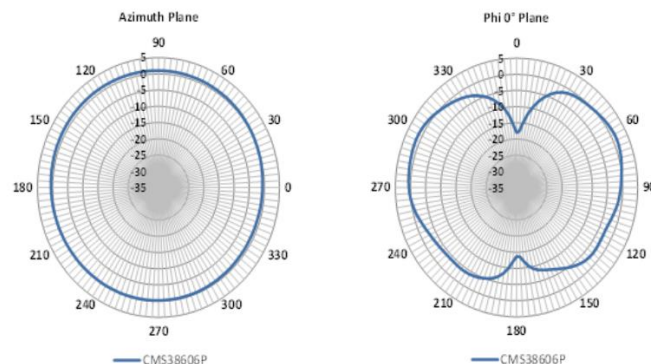


600 MHz

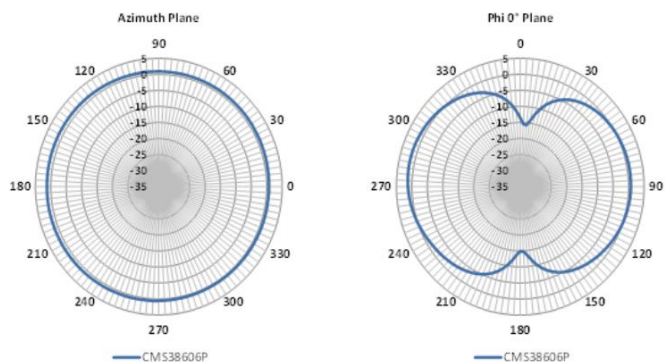


698 MHz

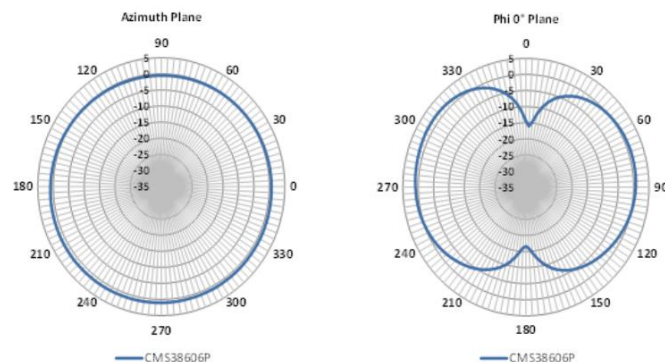


850 MHz

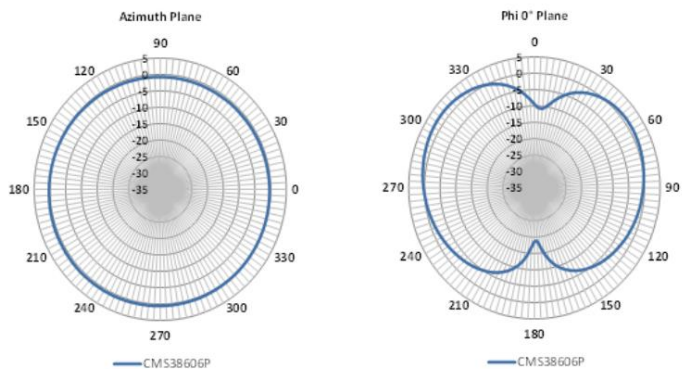


960 MHz

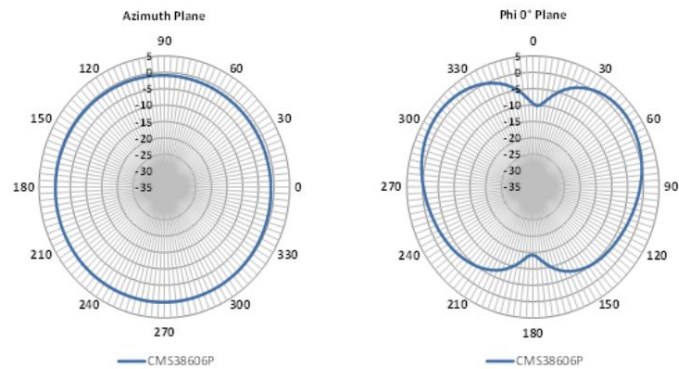


1395 MHz

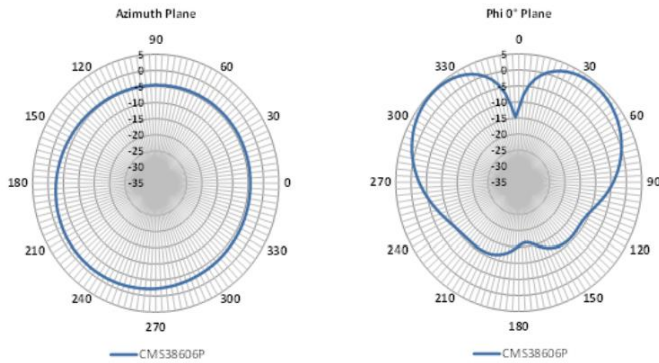


1690 MHz

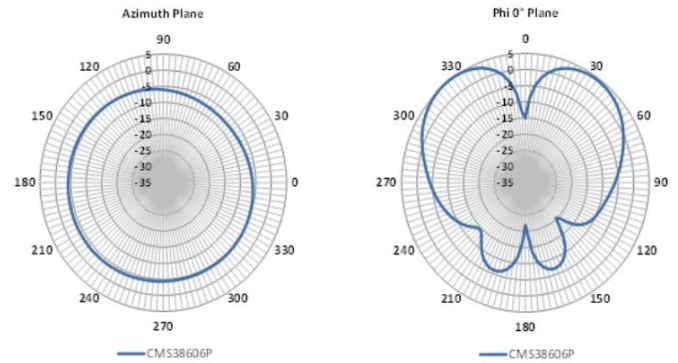


2700 MHz

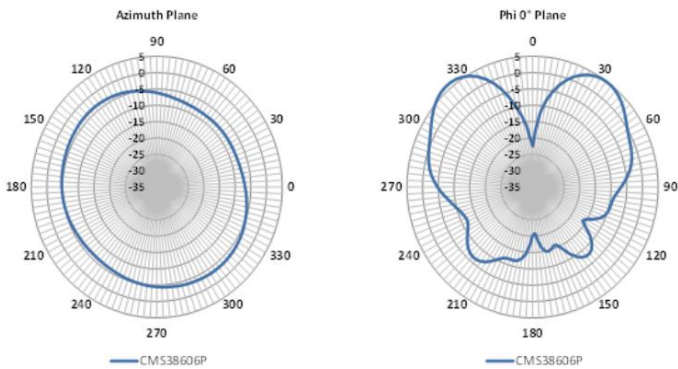

4300 MHz

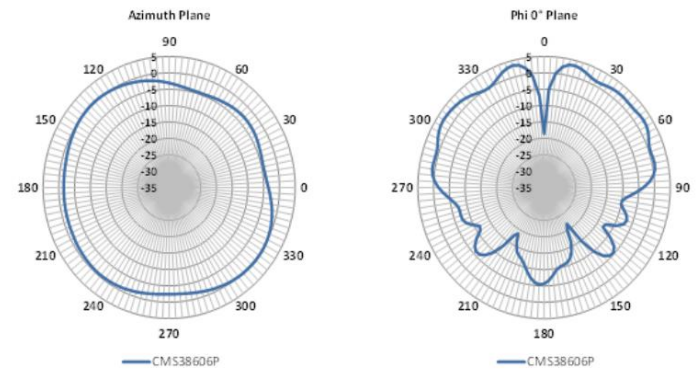

5950 MHz

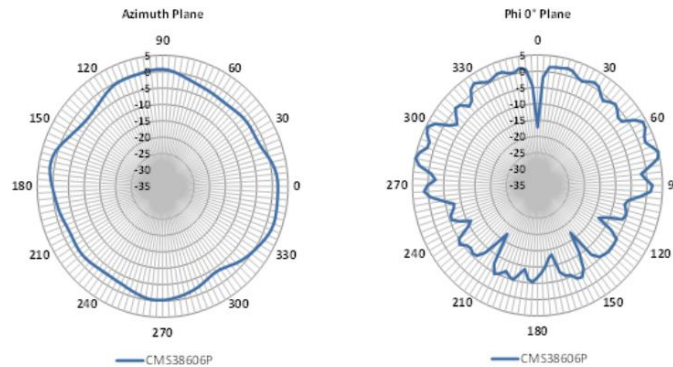

Americas: +1.847.839.6925
 IAS-AmericasSales@lairdtech.com
Europe: +44.1628.858941
 IAS-EUSales@lairdtech.com
Asia: IAS-AsiaSales@lairdtech.com
Middle East and Africa: +44.1628.858941
 IAS-MEASales@lairdtech.com
<https://connectivity.lairdtech.com/>

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2018 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

