



The Laird Connectivity CA178 cable assemblies are engineered for peak performance up to 7 GHz. They are 100% tested and certified to meet performance specifications. Equipment manufacturers require certified cable assemblies to minimize system losses to within known parameters and these cable assemblies meet those requirements. The manufacturing processes and raw materials are well controlled in order to provide very consistent performance from lot to lot.

FEATURES AND BENEFITS

- Consistent low loss design construction
- 100% tested and certified to meet specifications
- Various connector options available
- Flexible high temperature kink resistant cable jacket



APPLICATIONS

- High performance wireless systems
- OEM equipment
- WiMAX

SPECIFICATIONS

Model Name	CA178-NFB-UFL-8	CA178-NFB-UFL-12
Insertion Loss (dB) – max	-1.5	-2.5
Length – mm (inches)	203 (8.0)	305 (12.0)
Weight – g (lbs.)	40.0 (1.4)	43.0 (1.5)
Connector Types	N-Female bulkhead - UFL	
N Connector Seal	O-ring	
Contact Plating	Gold	
Operating Temperature – °C (°F)	-40 to +125°C (-22 to +158°F)	
Material Substance Compliance	RoHS	

INSERTION LOSS

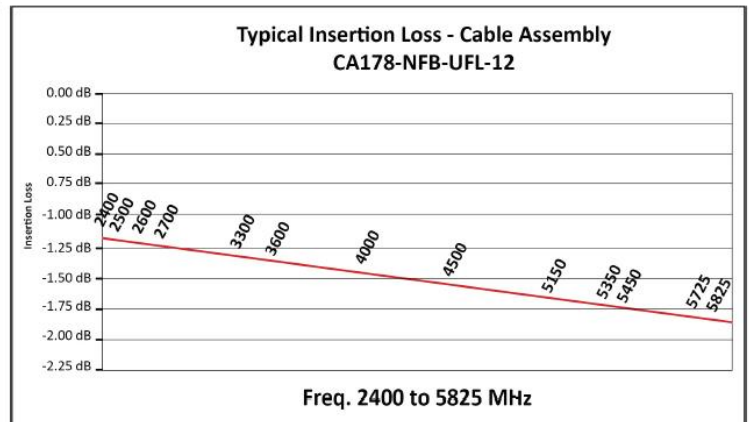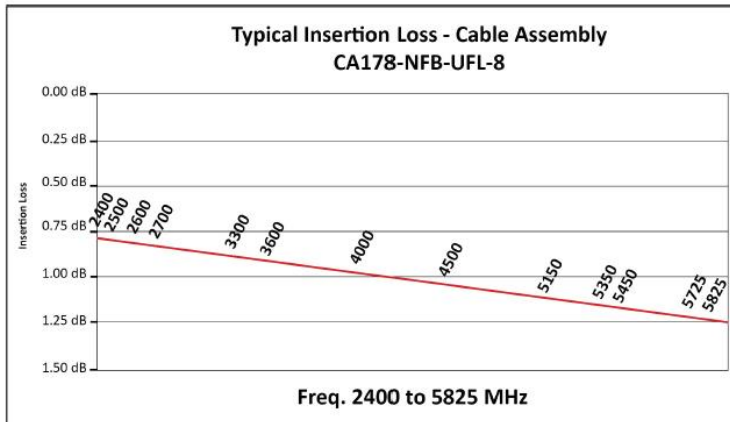

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
CA178-NFB-UFL-8	N-female bulkhead to U.FL, 8 inches
CA178-NFB-UFL-12	N-female bulkhead to U.FL, 12 inches
CA178-NM-UFL-8	N-male to U.FL, 8 inches
CA178-NM-UFL-12	N-male to U.FL, 12 inches

ORDERING INFORMATION

PART NUMBER	CONNECTOR 1	CONNECTOR 2	CABLE LENGTH cm (inches)	CABLE TYPE	MAX INSERTION LOSS (dB)
CA100-NFB-MC-12	N female bulkhead	MC-card	30.48 (12)	LMR100 (equivalent)	1.5
CA100-NFB-MMCX-12	N female bulkhead	MMCX	30.48 (12)	LMR100 (equivalent)	1.5
CA100-NFB-RASMAM-12	N female bulkhead	Right angle SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-NFB-RMMCX-12	N female bulkhead	Reverse polarity MMCX	30.48 (12)	LMR100 (equivalent)	1.5
CA100-NFB-RSMAM-12	N female bulkhead	Reverse polarity SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-NFB-RTNCM-12	N-female bulkhead	Reverse polarity TNC male	30.48 (12)	LMR100 (equivalent)	1
CA100-NFB-SMAM-8	N-female bulkhead	SMA male	20.32 (8)	LMR100 (equivalent)	0.8
CA100-NM-MC-12	N-male	MC-card	30.48 (12)	LMR100 (equivalent)	1
CA100-NM-MMCX-12	N-male	MMCX	30.48 (12)	LMR100 (equivalent)	1
CA100-NM-RASMAM-12	N-male	Right angle SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-NM-RSMAM-12	N-male	Reverse polarity SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-NM-RTNCM-12	N-male	Reverse polarity TNC male	30.48 (12)	LMR100 (equivalent)	1
CA100-RPSMAM-RASMAM-12	Reverse polarity SMA male	Right angle SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-RPTNCF-NC-6	Reverse polarity TNC female bulkhead	No connector	15.24 (6)	LMR100 (equivalent)	0.5
CA100-RPTNCM-RASMAM-12	Reverse polarity TNC male	Right angle SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-TNCF-NC-6	TNC female bulkhead	No connector	15.24 (6)	LMR100 (equivalent)	0.5
CA178-NFB-UFL-12	N female bulkhead	U.FL	30.48 (12)	RG178 high freq.	2
CA178-NFB-UFL-8	N female bulkhead	U.FL	20.32 (8)	RG178 high freq.	1.5
CA178-NM-UFL-12	N male	U.FL	30.48 (12)	RG178 high freq.	2
CA178-NM-UFL-8	N-male	U.FL	20.32 (8)	RG178 high freq.	1.5
CA178-RTNCB-MMCX-4	Reverse polarity TNC bulkhead (black)	MMCX	10.16 (4)	RG178 high freq.	0.8
CA178-RTNCB-MMCX-6	Reverse polarity TNC bulkhead (black)	MMCX	15.24 (6)	RG178 high freq.	1
CA178-RTNCB-UFL-6	Reverse polarity TNC bulkhead (black)	U.FL	15.24 (6)	RG178 high freq.	1
CA400-NM-NM-48	N male bulkhead	U.FL	121.92 (48)	LMR400 (equivalent)	0.8
CA58-NM-MCX-197	N-male	MCX	500.38 (197)	RG58/u (white)	5
CA58-SMA-MCX-96	Right angle SMA male	MCX	243.84 (96)	RG58/u (white)	2.5
CA58-SMA-NF-96	Right angle SMA male	N female bulkhead	243.84 (96)	RG58/u (white)	2.5
CA58-SMA-RSMA-96	Right angle SMA male	Reverse polarity SMA male	243.84 (96)	RG58/u (white)	2.5
CA58-SMA-RTNC-96	Right angle SMA male	Reverse polarity TNC male	243.84 (96)	RG58/u (white)	2.5
CA58-SMA-SMAF-96	Right angle SMA male	SMA female bulkhead	243.84 (96)	RG58/u (white)	2.5



Laird Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird Connectivity product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Connectivity and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Connectivity materials rests with the end user, since Laird Connectivity and its agents cannot be aware of all potential uses. Laird Connectivity makes no warranties as to the fitness, merchantability or suitability of any Laird Connectivity materials or products for any specific or general uses. Laird Connectivity shall not be liable for incidental or consequential damages of any kind. All Laird Connectivity products are sold pursuant to the Laird Connectivity Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2020 Laird Connectivity All Rights Reserved. Laird Connectivity, the Laird Connectivity logo, and other marks are trademarks or registered trademarks of Laird Connectivity or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Connectivity or any third party intellectual property rights.

sales@lairdconnect.com
support@lairdconnect.com
www.lairdconnect.com

