

The Revie Flex (EFF6925A3S) is a flexible PCB antenna for use in LTE CAT M1 and NB-IoT devices. The antenna is optimized for use when mounted to plastic via the supplied adhesive backing. This antenna operates within 698-875 MHz and 1710-2500 MHz with excellent radiation performance. The high efficiency ensures reliable connection in a variety of integration environments.

FEATURES AND BENEFITS

- Ground plane independent
- Optimized for LTE CAT M1 and NB-IoT
- Wide bandwidth, pairs with all radios in specified frequency range
- Excellent efficiency: >51%
- Easy peel-and-stick Integration
- Alternative connectors and cable lengths available

ELECTRICAL SPECIFICATIONS

Laird Part Number	EFF6925A3S	
Operating Frequency (MHz)	698 - 875	1710 - 2500
Number of Ports	1	1
VSWR – Max	2.5:1	2.5:1
Gain (dBi)	1.9	3.7
Efficiency (%)*	51	80
Nominal Impedance (Ohms)	50	50
Max Power - Ambient 25°C (W)	5	5
Polarization	Linear	

* A minimum cable length of 153 mm is required to achieve the stated efficiency.

MECHANICAL SPECIFICATIONS

Dimensions – diameter x height – mm (inches)	90 x 20 x 0.16 (3.54 x 0.79 x 0.006)
Cable Type	1.13 mm
Connector	IPEX MHF1 (u.FL)
Cable Length mm	153
Adhesive Type	3M 467MP


ENVIRONMENTAL SPECIFICATIONS

Operating Environment (Indoor or Outdoor)	Integrated/embedded
Operating Temperature – °C (°F)	-40 to +85 (-40 to +185)
Storage Temperature – °C (°F)	-40 to +85 (-40 to +185)

CONFIGURATION


PART NUMBER	CABLE LENGTH	CONNECTOR
EFF6925A3S-15MHF1	153	IPEX MHF1 (u.FL)

MECHANICAL DRAWING

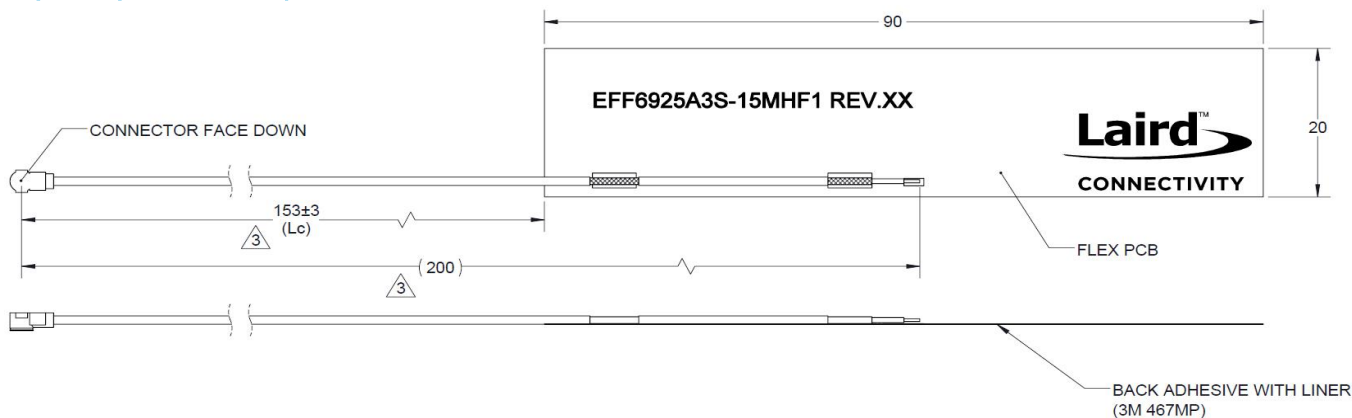


RADIATION PATTERNS


698 MHz

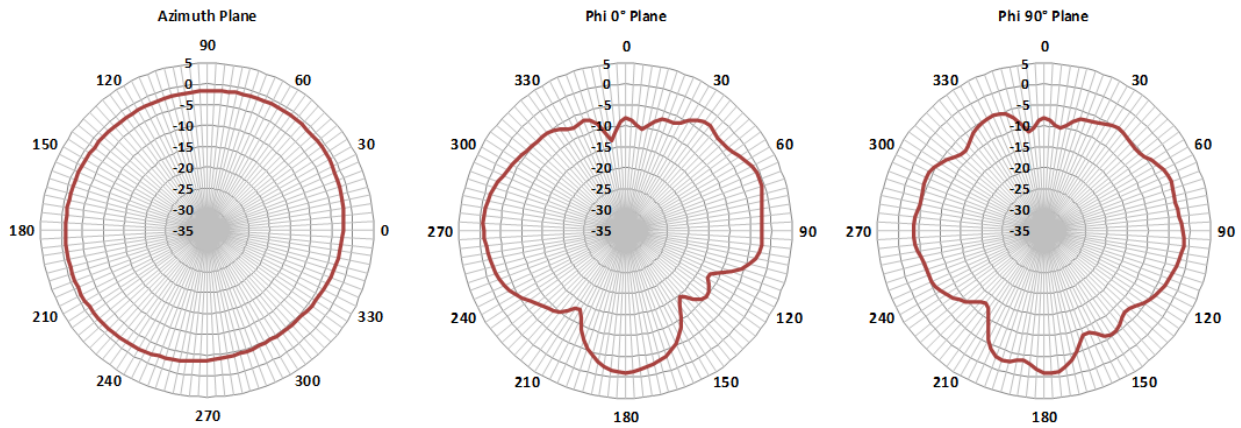

746 MHz

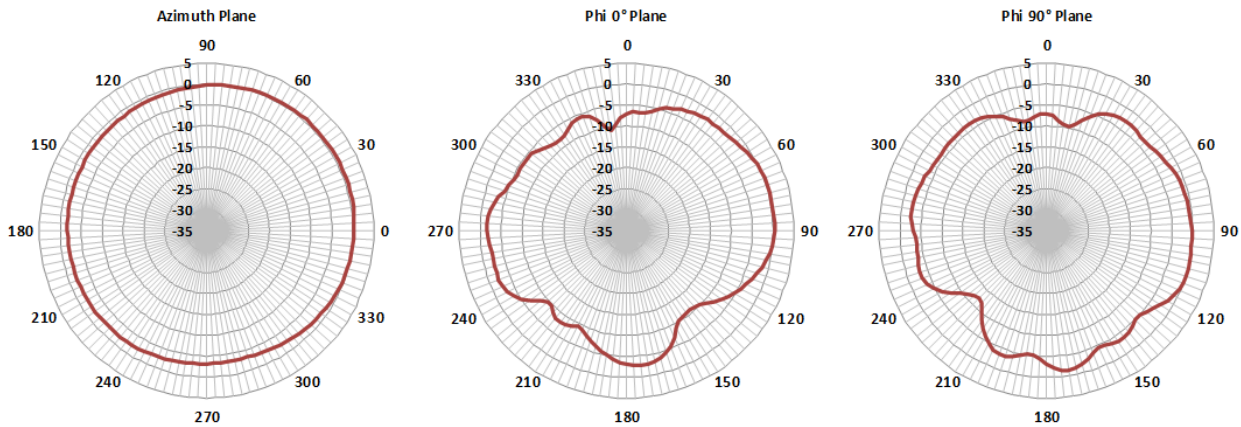


787 MHz

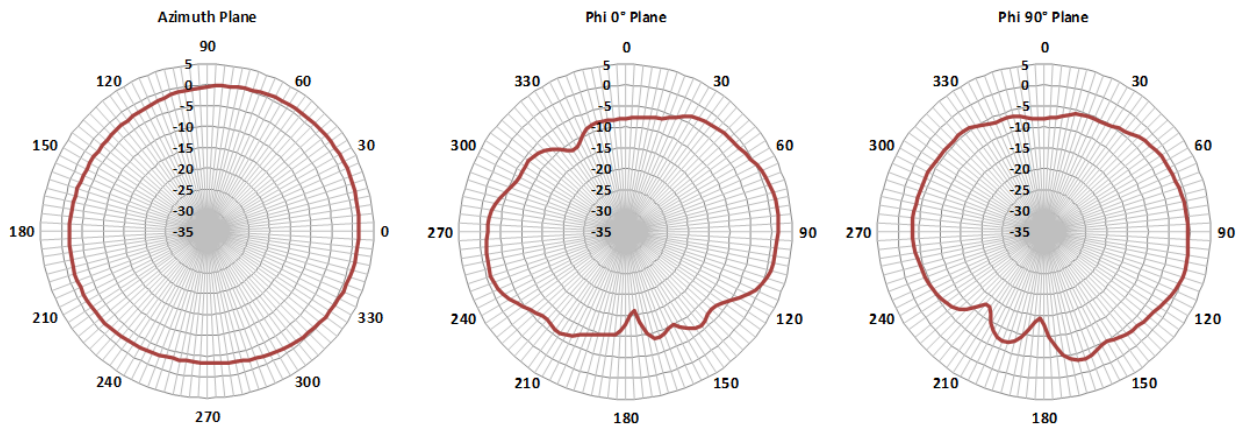


RADIATION PATTERNS


793 MHz

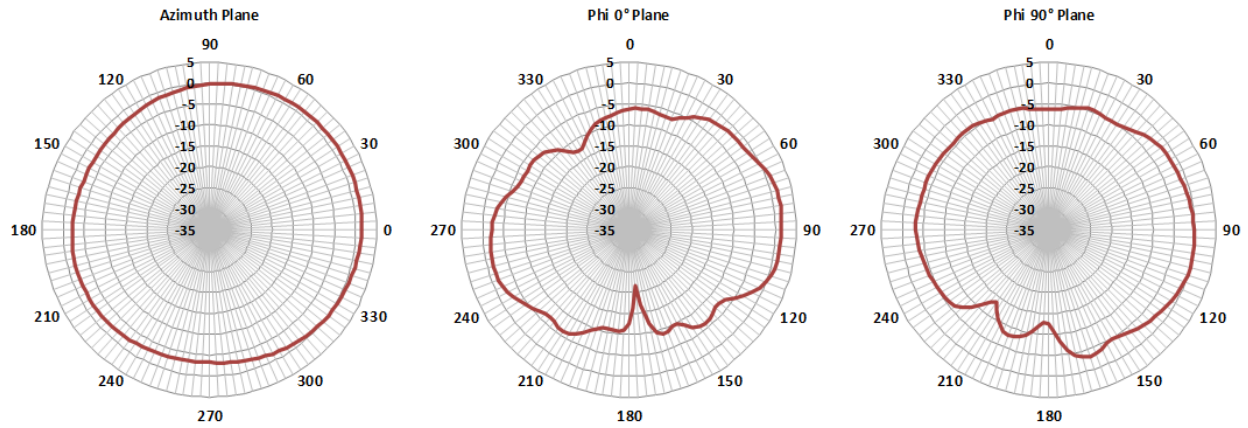

862 MHz

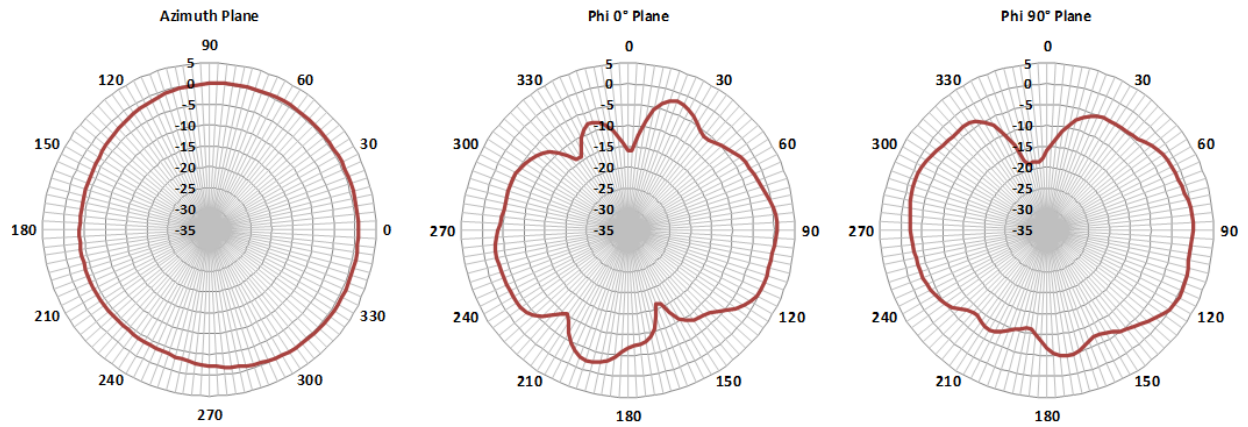


875 MHz

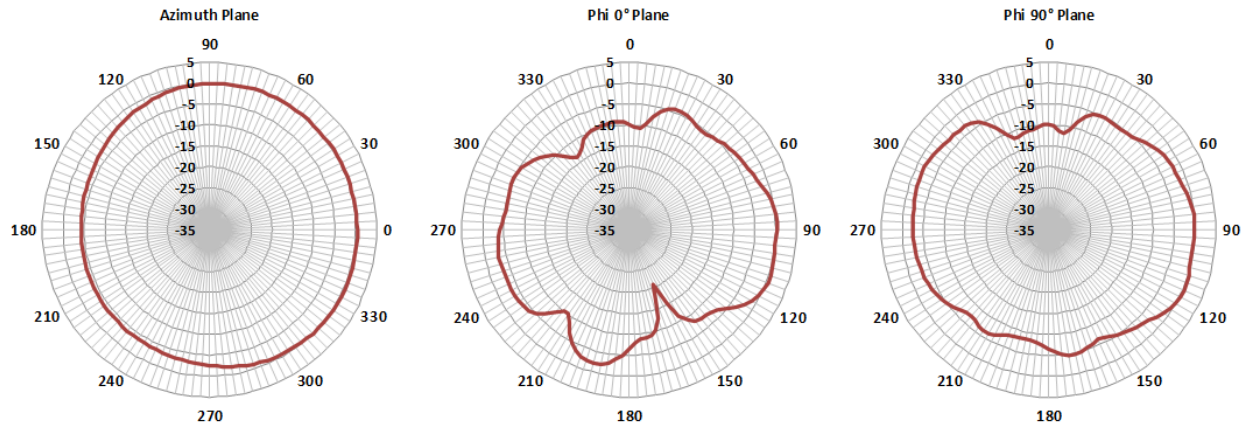


RADIATION PATTERNS


1710 MHz

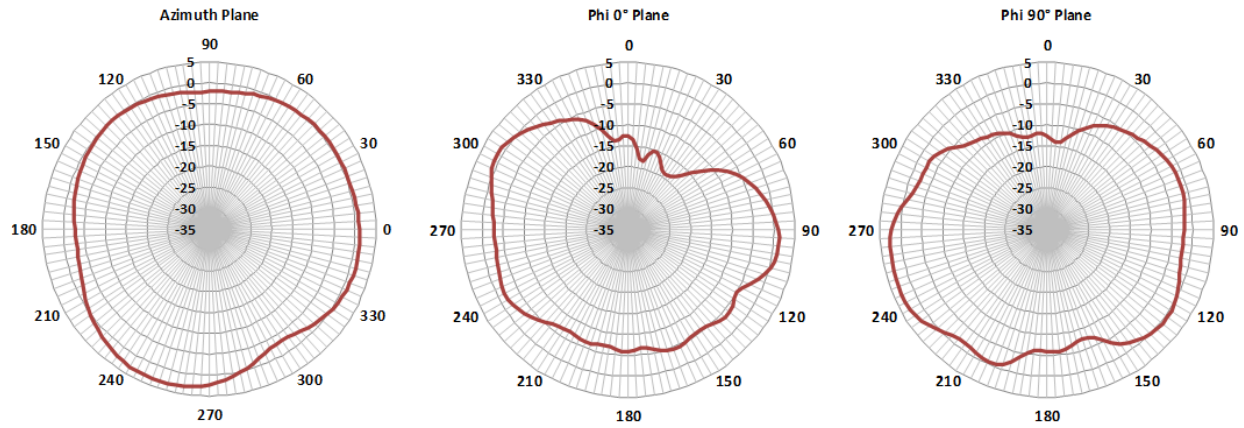

1850 MHz

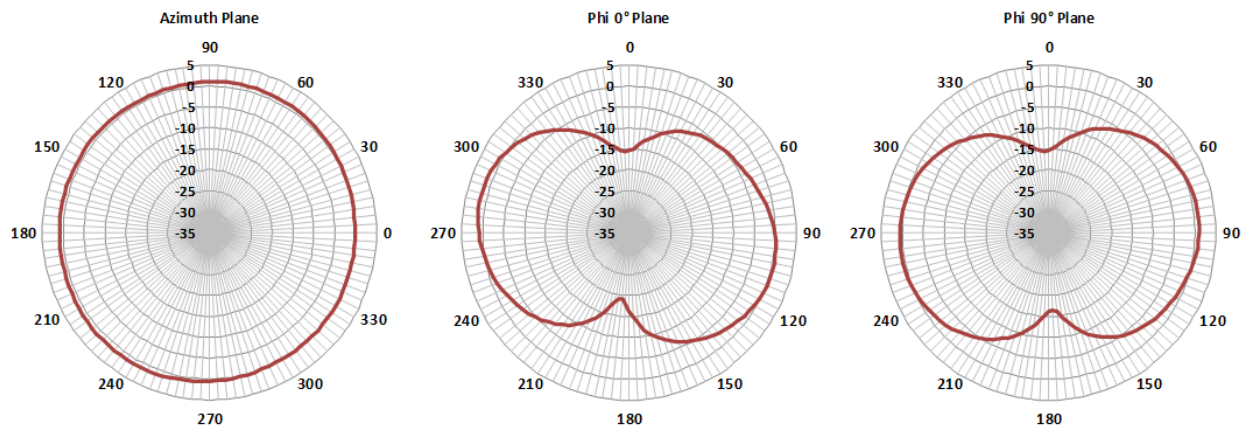


1990 MHz

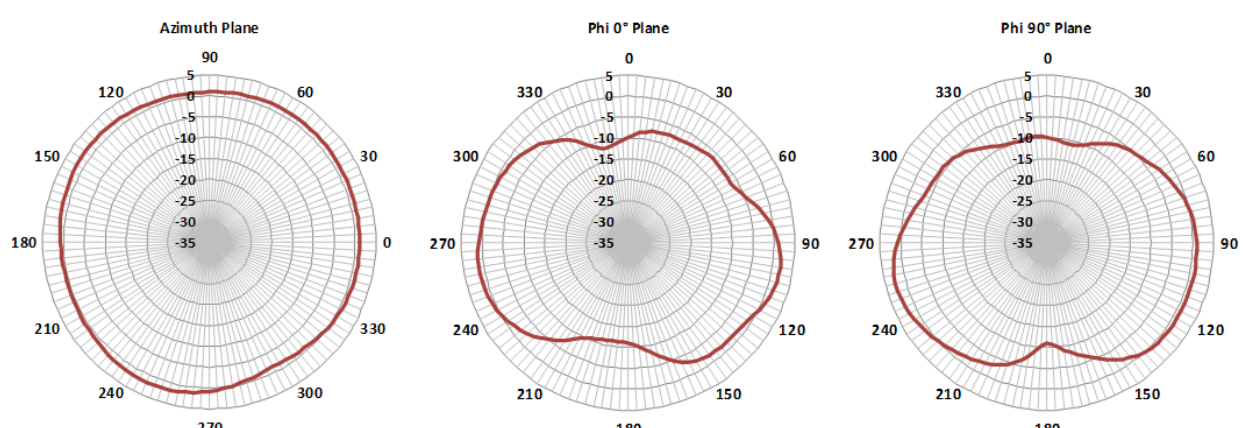


RADIATION PATTERNS


2155 MHz

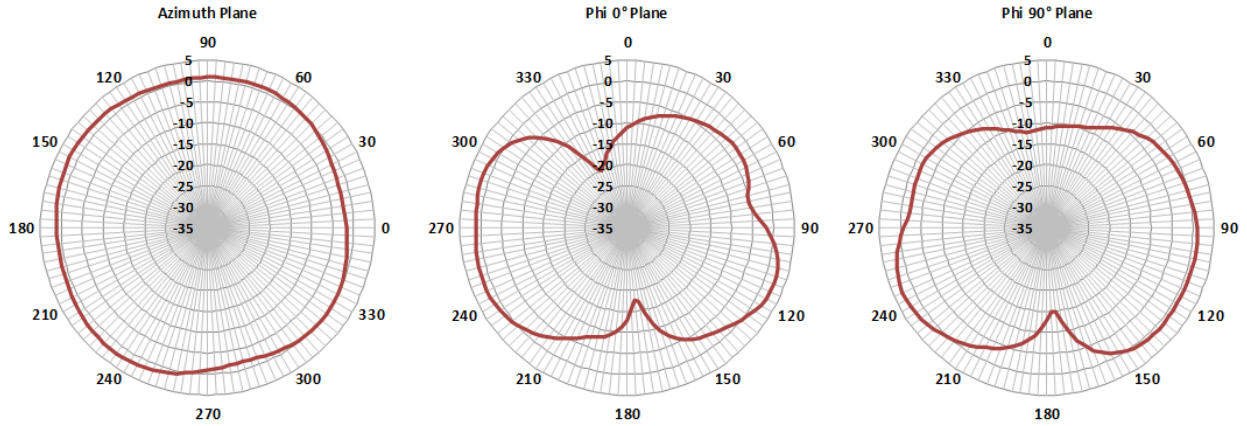

2400 MHz

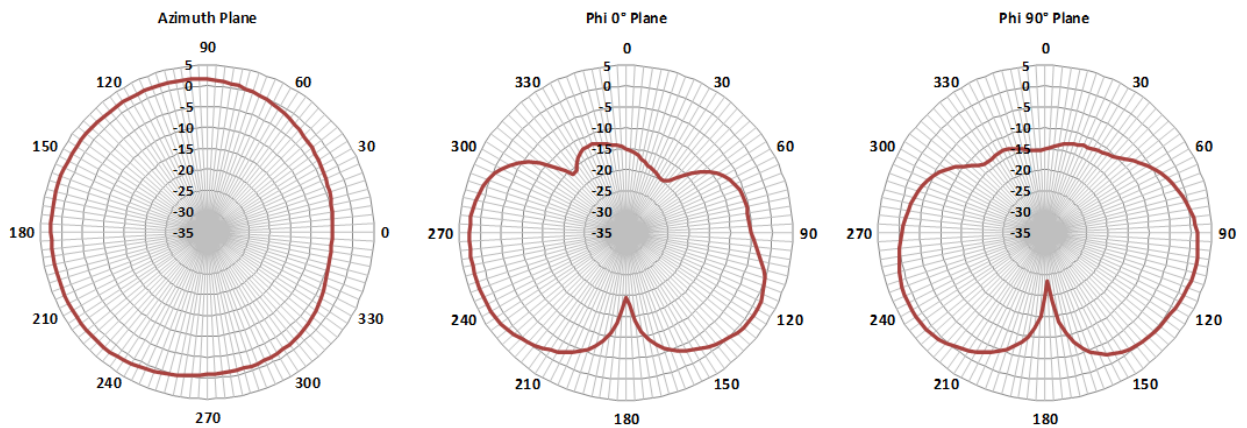

2500 MHz

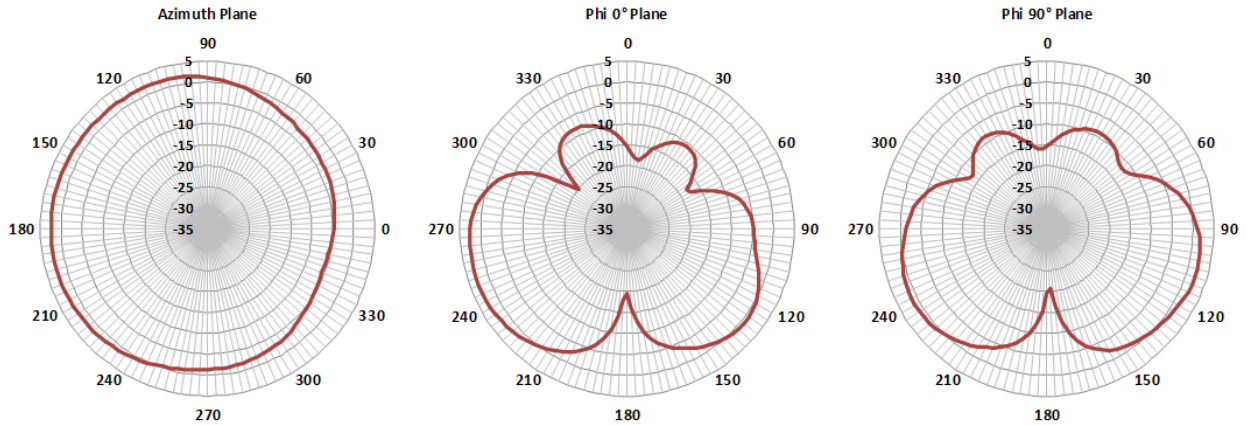

ADDITIONAL ASSISTANCE

Please contact your local Laird Connectivity sales representative or our support team for further assistance:

Support Center <https://www.lairdconnect.com/resources/support>

Phone Americas: +1-800-492-2320
 Europe: +44-1628-858-940
 Hong Kong: +852 2762 4823

Web <https://www.lairdconnect.com/internal-antennas>

Address Laird Connectivity
 50 S. Main Street, Suite 1100
 Akron, OH 44308

sales@lairdconnect.com
support@lairdconnect.com
www.lairdconnect.com

© Copyright 2023 Laird Connectivity. All Rights Reserved. Patent pending. Any information furnished by Laird Connectivity and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Connectivity materials or products rests with the end user since Laird Connectivity and its agents cannot be aware of all potential uses. Laird Connectivity makes no warranties as to non-infringement nor as to the fitness, merchantability, or sustainability of any Laird Connectivity materials or products for any specific or general uses. Laird Connectivity or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird Connectivity products are sold pursuant to the Laird Connectivity Terms and Conditions of Sale in effect from time to time, a copy of which will be furnished upon request. Nothing herein provides a license under any Laird Connectivity or any third-party intellectual property right.