


CE EMC Test Report

Equipment : Bluetooth BT5.4 Dual Model Module
Model No. : Vela IF820
Brand Name : Laird Connectivity
Applicant : Laird Connectivity LLC
Address : W66N220 Commerce Court, Cedarburg, WI
53012 United States Of America
Standard : EN 301 489-1 V2.2.3 (2019-11)
EN 301 489-17 V3.2.4 (2020-09)
Received Date : Apr. 18, 2023
Tested Date : Jun. 14 ~ Jun. 29, 2023

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Approved by:



Peter Lin / Assistant Manager



JN Chen / Supervisor



Kent Chen / Manager

Table of Contents

1	GENERAL DESCRIPTION	6
1.1	Information.....	6
1.2	Test Equipment and Calibration Data	7
1.3	Testing Applied Standards	8
1.4	Deviation from Test Standard and Measurement Procedure.....	8
1.5	Measurement Uncertainty	9
2	TEST CONFIGURATION.....	10
2.1	Testing Facility	10
2.2	The Worst Case Measurement Configuration.....	10
2.3	Local Support Equipment List	12
2.4	Test Setup Chart	13
2.5	Test Software and Operating Condition	14
3	EMISSION TEST RESULTS.....	15
3.1	Conducted Emissions from the AC mains power ports.....	15
3.2	Radiated Emissions.....	17
4	IMMUNITY TESTS	21
4.1	General Description.....	21
4.2	Performance Criteria Description	21
4.3	Electrostatic Discharge (ESD).....	22
4.4	Radio Frequency Electromagnetic Field (RS).....	26
5	TEST LABORATORY INFORMATION	29
Appendix A. Conducted Emissions from the AC mains power ports		
Appendix B. Radiated Emissions below 1GHz		
Appendix C. Radiated Emissions above 1GHz		
Appendix D. Test Photos		

Release Record

Report No.	Version	Description	Issued Date
EH341801	Rev. 01	Initial issue	Sep. 19, 2023

Summary of Test Results

EN 301 489-1 Emission Tests				
Ref. Std. Clause	Test Standard	Test Items	Measured	Result
8.3/8.4	EN 55032:2015/A1:2020, Class B	Conducted Emissions from the AC mains power ports	Under limit 9.62dB @ 0.151MHz.	Pass
8.7	EN 55032:2015/A1:2020, Class B	Asymmetric Mode Conducted Emissions	Note ¹	N/A
8.2	EN 55032:2015/A1:2020, Class B	Radiated Emissions	Under limit 7.05dB @ 424.85MHz.	Pass
8.5	EN IEC 61000-3-2:2019/A1:2021, Class A	Harmonic Current Emissions	Note ²	N/A
8.6	EN 61000-3-3:2013/A1:2019 EN 61000-3-3:2013/A2:2021	Voltage Fluctuations and Flicker	Note ²	N/A
N/A means Not Applicable. Note¹: The EUT w/o telecom port. Note²: The EUT consumes DC power, so the test is not required.				

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

EN 301 489-1 Immunity Tests					
Ref. Std. Clause	Test Standard	Description of Test		Pass Criterion	Result
9.3	EN 61000-4-2:2009	Electrostatic Discharge (ESD)		A	Pass
9.2	EN 61000-4-3:2006/A1:2008/A2:2010	Radio Frequency Electromagnetic Field (RS)		A	Pass
9.4	EN 61000-4-4:2012	Electrical Fast Transient/Burst (EFT)		Note ¹	N/A
9.8	EN 61000-4-5:2014+A1:2017	Surge		Note ²	N/A
9.5	EN 61000-4-6:2014	Conducted Disturbances (CS)		Note ¹	N/A
9.7	EN 61000-4-11:2004+A1:2017	Voltage Dips	0% residual for 0.5 cycle	Note ²	N/A
			0% residual for 1 cycle	Note ²	N/A
			70% residual for 25 cycle	Note ²	N/A
		Voltage Interruption	0% residual for 250 cycle	Note ²	N/A
N/A means Not Applicable. Note ¹ : The EUT consumes DC power, and it is not intended to be used with cables longer than 3m. So this test is not carried out. Note ² : The EUT consumes DC power, so the test is not required.					

Comments and Explanations:
None.

1 General Description

1.1 Information

The EUT is available in SA module (integrated antenna) and SC module (IPEX MHF4 connector) variants.

Model Name	Part No.	Module
Vela IF820	453-00171	SA Module, Vela IF820, Integrated Antenna
	453-00172	SC Module, Vela IF820, MHF4

1.1.1 Specification of the Equipment under Test (EUT)

Operating Frequency	2402 MHz ~ 2480 MHz
Modulation Type	Bluetooth LE: GFSK Bluetooth BR(1Mbps): GFSK Bluetooth EDR (2Mbps): $\pi/4$ -DQPSK Bluetooth EDR (3Mbps): 8-DPSK
S/W Version	CYW20820A1_001.002.012.0271.0000_Generic_bt1e_20820FCBGA62.cgr

1.1.2 Antenna Details

Ant. No.	Manufacturer	Model	Laird Part Number	Type	Connector	Gain
1	Laird	NanoBlue	EBL2400A1-10M H4L	PCB Dipole	IPEX MHF4	2dBi
2	Laird	FlexPIFA	001-0022	PCB Dipole	IPEX MHF4	2dBi
3	Mag.Layers	EDA-8709-2G4C 1-B27-CY	0600-00057	Dipole	IPEX MHF4	2.32dBi
4	Laird	mFlexPIFA	EFA2400A3S-10 MH4L	PIFA	IPEX MHF4	2dBi
5	ACX	AD1608	AD1608-A2455A AT/LF	Chip Antenna	N/A	1dBi

1.1.3 Power Supply Type of the Equipment under Test (EUT)

Power Supply Type	3Vdc from host
-------------------	----------------

1.1.4 Accessories

N/A

1.2 Test Equipment and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test Date	Jun. 15, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 17, 2023	Feb. 16, 2024
LISN	R&S	ENV216	101579	May 09, 2023	May 08, 2024
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127667	Jan. 03, 2023	Jan. 02, 2024
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 17, 2022	Oct. 16, 2023
50 ohm terminal (Support Unit)	NA	50	01	Jun. 14, 2023	Jun. 13, 2024
Measurement Software	Sporton	SENSE-EMI	V5.10.8.7	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission below 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test Date	Jun. 14, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	Agilent	N9038A	MY53290044	Sep. 12, 2022	Sep. 11, 2023
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-562	May 17, 2023	May 16, 2024
Preamplifier	EMC	EMC02325	980194	Sep. 15, 2022	Sep. 14, 2023
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160501	Oct. 05, 2022	Oct. 04, 2023
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Oct. 05, 2022	Oct. 04, 2023
LF cable 10M	EMC	CFD400-E	CFD400-001	Oct. 05, 2022	Oct. 04, 2023
Measurement Software	Sporton	SENSE-EMI	V5.10.8.7	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test Date	Jun. 16, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 21, 2022	Nov. 20, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Sep. 16, 2022	Sep. 15, 2023
Preamplifier	Agilent	83017A	MY39501309	Sep. 05, 2022	Sep. 04, 2023
RF Cable	EMC	EMC105-SM-SM-8000	180512	Oct. 05, 2022	Oct. 04, 2023
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Oct. 05, 2022	Oct. 04, 2023
Measurement Software	Sporton	SENSE-EMI	V5.10.8.7	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	ESD				
Test Site	ESD room 1 / (ES01-WS)				
Tested Date	Jun. 06, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
ESD Generator	TESEQ	NSG437	102	Dec. 29, 2022	Dec. 28, 2023
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Immunity (80 MHz - 6 GHz)				
Test Site	RS room 1 / (RS01-WS)				
Tested Date	Jun. 29, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Signal Generator	R&S	SMB100A	103924HA	Oct. 04, 2022	Oct. 03, 2023
Power Sensor	R&S	NRP-Z91	101094	Oct. 05, 2022	Oct. 04, 2023
Power Sensor	R&S	NRP-Z91	101095	Oct. 05, 2022	Oct. 04, 2023
Power Amplifier	BONN	BLWA 0810-160/100D	107972A	N/A	N/A
Power Amplifier	BONN	BLMA 1060-100D	107972B	N/A	N/A
Antenna	SCHWARZBECK MESS-ELEKTRONIK	STLP 9149	9149-073	N/A	N/A
Antenna	R&S	HL046E	100076-Cd	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

EN 301 489-1 V2.2.3 (2019-11)
EN 301 489-17 V3.2.4 (2020-09)

1.4 Deviation from Test Standard and Measurement Procedure

None

1.5 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty		
Test Item	Frequency	Uncertainty
Conducted Emissions from the AC mains power ports	150kHz ~ 30MHz	± 2.92 dB
Radiated Emissions	30MHz ~ 1GHz	± 4.32 dB
	Above 1GHz	± 4.57 dB

Note: The results of measurements of emissions shall reference the measurement uncertainty considerations contained in CISPR 16-4-2.

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH02-WS, RS01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	ES01-WS
Address of Test Site	No.2-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

2.2 The Worst Case Measurement Configuration

Radiation Pretested Mode	
Pretest Mode	Operating Description
1	EUT(SC Module): X-axis, Ant.: NanoBlue, BT link, w/ laptop 230V/50Hz
2	EUT(SC Module): Y-axis, Ant.: NanoBlue, BT link, w/ laptop 230V/50Hz
3	EUT(SC Module): Z-axis, Ant.: NanoBlue, BT link, w/ laptop 230V/50Hz
4	EUT(SC Module): Y-axis, Ant.: FlexPIFA, BT link, w/ laptop 230V/50Hz
5	EUT(SC Module): Y-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, w/ laptop 230V/50Hz
6	EUT(SC Module): Y-axis, Ant.: mFlexPIFA, BT link, w/ laptop 230V/50Hz
7	EUT(SA Module): Y-axis, Ant.: AD1608, BT link, w/ laptop 230V/50Hz
8	EUT(SC Module): Y-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, w/ laptop 110V/60Hz
9	EUT(SC Module): Y-axis, Ant.: EDA-8709-2G4C1-B27-CY, Standby w/ laptop 230V/50Hz
For Pretest Mode 5 is the worst case and only its data was record in this test report.	


The Worst Test Configurations	
Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	EUT(SC Module): X-axis, Ant.: NanoBlue, BT link, w/ laptop 230V/50Hz
2	EUT(SC Module): X-axis, Ant.: FlexPIFA, BT link, w/ laptop 230V/50Hz
3	EUT(SC Module): X-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, w/ laptop 230V/50Hz
4	EUT(SC Module): X-axis, Ant.: mFlexPIFA, BT link, w/ laptop 230V/50Hz
5	EUT(SA Module): X-axis, Ant.: AD1608, BT link, w/ laptop 110V/60Hz
Radiated Emissions	
Test Mode ≤1GHz	Operating Description
1	EUT(SC Module): Y-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, w/ laptop 230V/50Hz
Test Mode >1GHz	Operating Description
1	EUT(SC Module): Y-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, w/ laptop 230V/50Hz
Immunity Tests (PER Mode was for RS test only)	
Test Mode	Operating Description
1	EUT(SC Module): Ant.: NanoBlue, BT link, w/ laptop 230V/50Hz
2	EUT(SC Module): Ant.: FlexPIFA, BT link, w/ laptop 230V/50Hz
3	EUT(SC Module): Ant.: EDA-8709-2G4C1-B27-CY, BT link, w/ laptop 230V/50Hz
4	EUT(SC Module): Ant.: mFlexPIFA, BT link, w/ laptop 230V/50Hz
5	EUT(SA Module): Ant.: AD1608, BT link, w/ laptop 230V/50Hz


2.3 Local Support Equipment List

Support Equipment List (EMI)					
No.	Equipment	Brand	Model	S/N	Remarks
1	Wireless connectivity tester	R&S	CMW270	100856	---
2	Laptop	DELL	Latitude 3400	HKZLWZ2	
3	Mouse	DELL	MS111-L	2C3-00MM	
4	Printer	EPSON	XP-30	QSDK002410	
5	Fixture	---	---	---	Provided by applicant.

Support Equipment List (EMS)					
No.	Equipment	Brand	Model	S/N	Remarks
1	Wireless connectivity tester	R&S	CMW270	100856	---
2	Laptop	DELL	Latitude 5400	FHLZL33	
3	Fixture	---	---	---	Provided by applicant.

2.4 Test Setup Chart

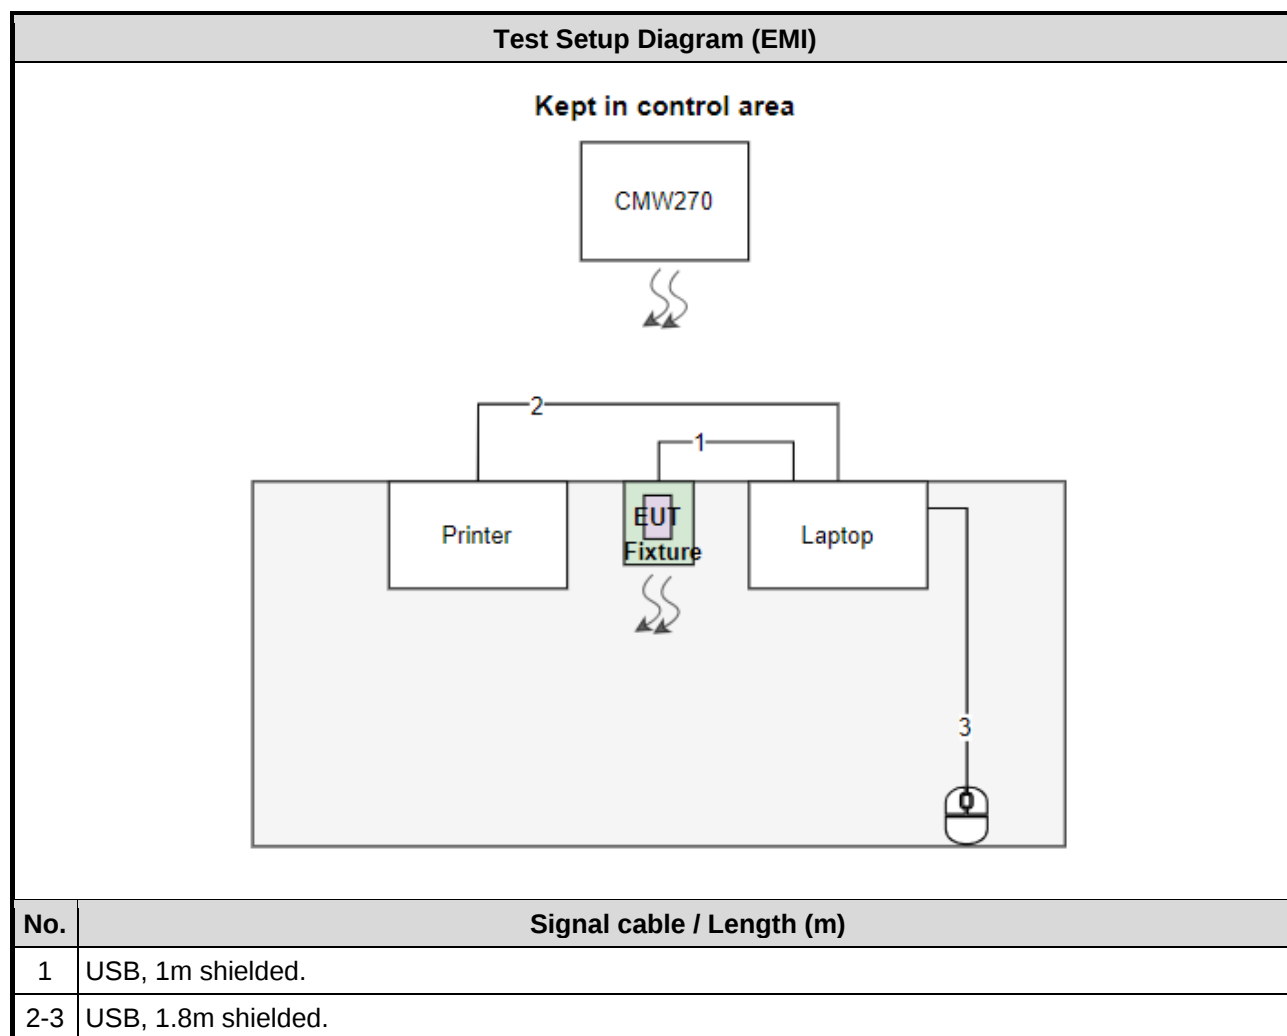

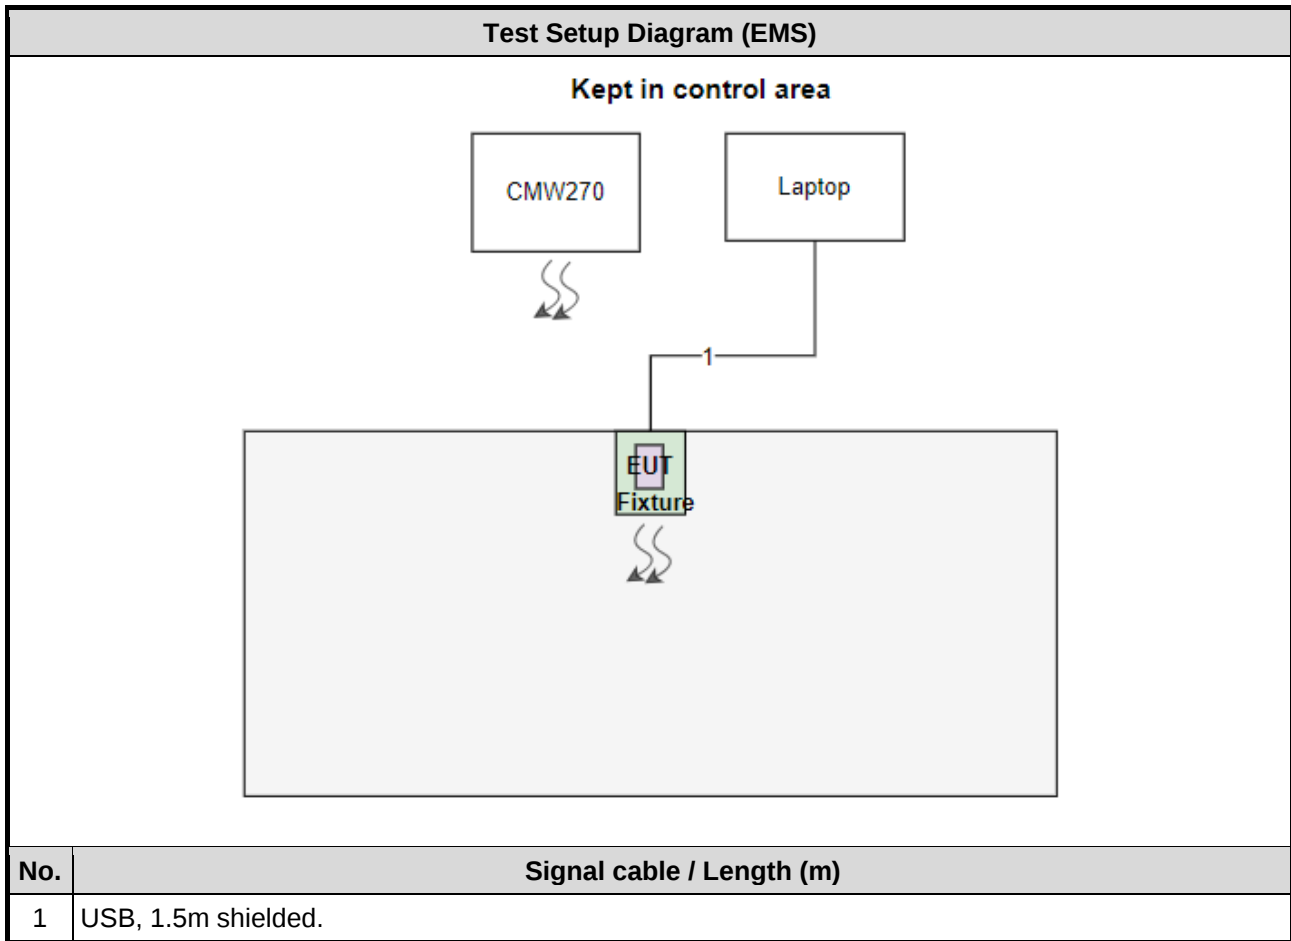

2.5 Test Software and Operating Condition

<EMI>

- a. The support laptop executes "WinEMC.exe" to the printer for printing.
- b. The support laptop executes "KM player.exe" to play colorbar video.
- c. The support laptop executes ping command for BT link to CMW270.

<EMS>

- a. The support laptop executes ping command for BT link to CMW270.

BT PER

- a. The support laptop executes AIROC & CYBLUETOOL to link with CMW270, and observe BT packet error rate below 10%.

3 Emission Test Results

3.1 Conducted Emissions from the AC mains power ports

3.1.1 Limits of Conducted Emissions from the AC mains power ports


Frequency Range	Limits values (dB μ V)			
	Class A		Class B	
	Quasi-Peak	Average	Quasi-Peak	Average
0,15 MHz to 0,5 MHz	79	66	66 to 56 *	56 to 46 *
> 0,5 MHz to 5 MHz	73	60	56	46
> 5 MHz to 30 MHz	73	60	60	50

Note 1: "*" Decreasing linearly with the logarithm of the frequency.
 Note 2: If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
 Note 3: The higher value measured with and without the outer conductor screen of the antenna terminal connected to earth is considered.

3.1.2 Test Procedures

- The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- A thickness of ≤ 0.15 m insulation should be placed between local AE and associated cabling and the RGP.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

3.1.3 Test Setup

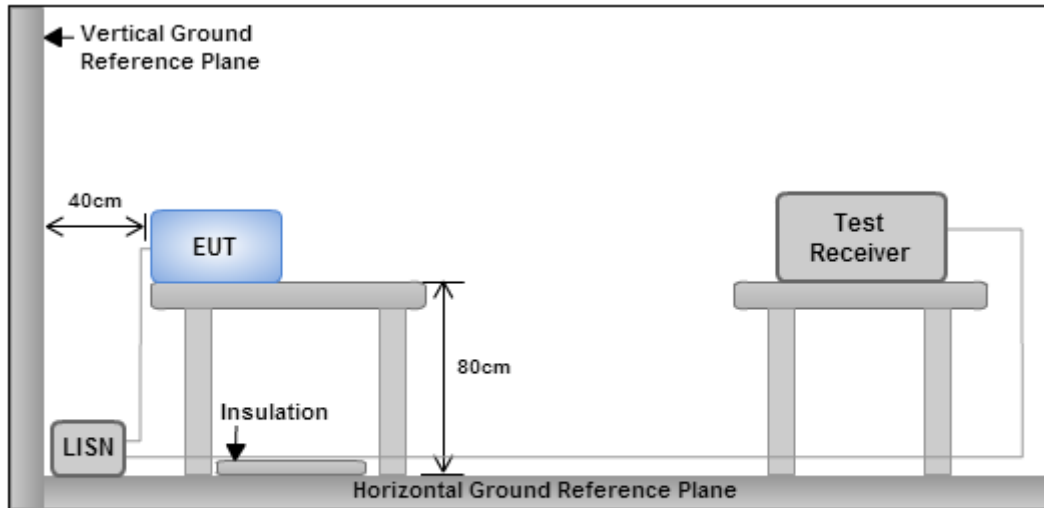

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Results

Refer to Appendix A.

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions

Frequency Range (MHz)	Class A		Class B	
	10m	3m	10m	3m
	Quasi-peak limits (dB μ V/m)			
30 to 230	40	50	30	40
230 to 1000	47	57	37	47

Note 1: The lower limit shall apply at the transition frequency.
Note 2: Additional provisions may be required for cases where interference occurs.

Frequency range (GHz)	Class A (3m)		Class B (3m)	
	Average limit (dB μ V/m)	Peak limit (dB μ V/m)	Average limit (dB μ V/m)	Peak limit (dB μ V/m)
1 to 6	60	80	54	74

Note: Additional provisions may be required for cases where interference occurs.

For an unintentional radiator is shown in the table below.


The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.	Upper frequency of measurement range
Below 108 MHz	1 GHz
108 MHz to 500 MHz	2 GHz
500 MHz to 1 GHz	5 GHz
Above 1 GHz	5 times the highest frequency or 6 GHz, whichever is less.

3.2.2 Test Procedures


- a. The EUT was placed on a rotatable table top with a height of 0.8 meters which is placed on the ground plane.
- b. A thickness of $\leq 0.15\text{m}$ insulation should be placed between local AE and associated cabling and the RGP.
- c. The EUT received DC power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- d. The EUT and local AE shall be arranged in the most compact practical arrangement within the test volume. The central point of the arrangement shall be positioned at the centre of the turntable. The measurement distance is the shortest horizontal distance between an imaginary circular periphery just encompassing this arrangement and calibration point of the antenna.
- e. The table was rotated 360 degrees to determine the position of the highest radiation.
- f. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- g. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 to 4 meters) and turn table (from 0 to 360 degrees) to find the maximum reading.
- h. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 2 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 2 dB margin will be repeated one by one using the quasi-peak method and reported.

3.2.3 Test Setup

Radiated Emissions below 1GHz

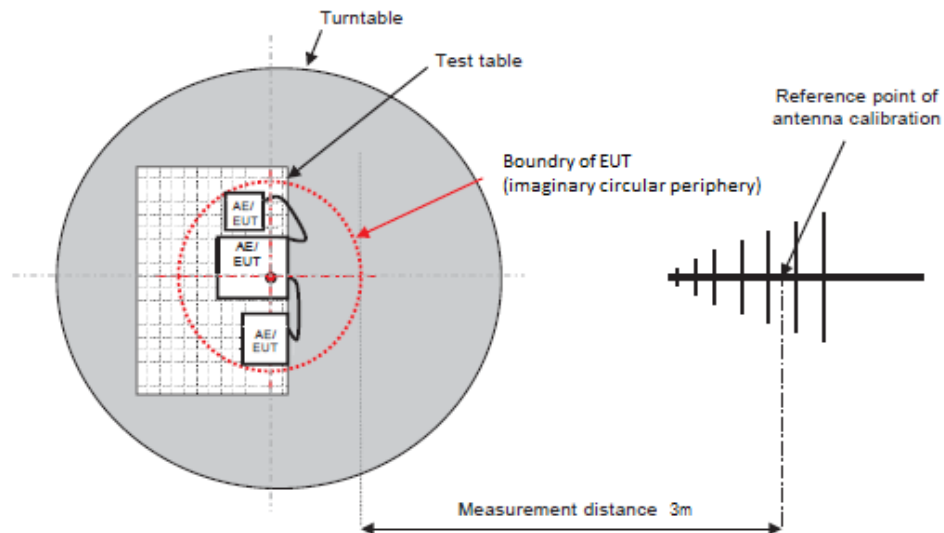

Radiated Emissions above 1GHz

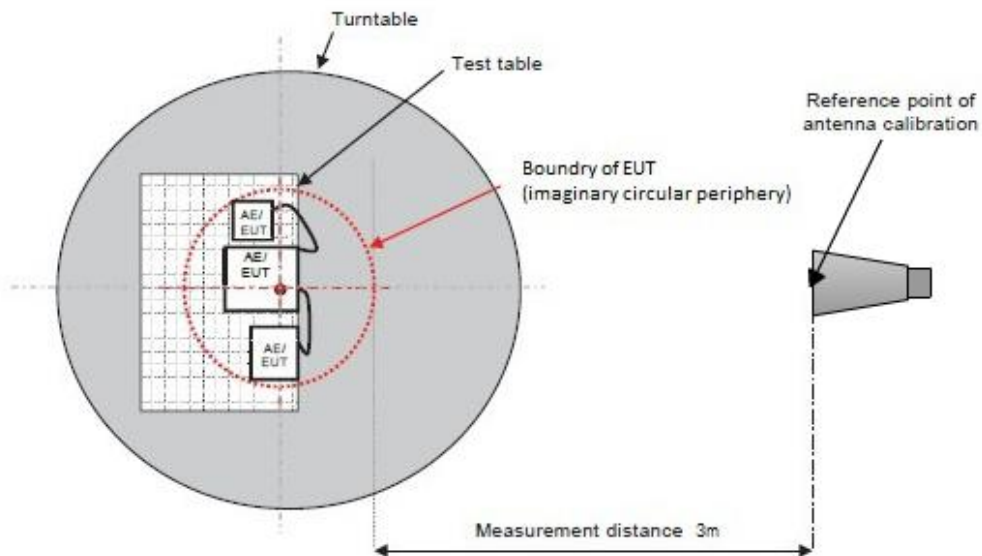

3.2.4 Test Results (Below 1GHz)

Refer to Appendix B.

3.2.5 Test Results (Above 1GHz)

Refer to Appendix C.

4 Immunity Tests

4.1 General Description

Product Standard: EN 301 489-1 , EN 301 489-17		
Basic Standard	Spec. Requirement	Performance Criteria
EN 61000-4-2 (ESD)	Contact Discharge: ± 4 kV Air Discharge: ± 8 kV	B
EN 61000-4-3 (RS)	80 MHz to 6000 MHz 3 V/m, 1 kHz Sine Wave 80%, AM Modulation	A

4.2 Performance Criteria Description

EN 301 489-17 Performance Criteria		
Criteria	During test	After test (i.e. as a result of the application of the test)
A	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

Note: Operate as intended during the test allows a level of degradation in accordance with clause 6.2.2.

Clause 6.2.2 Minimum performance level
For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10%.
For equipment that does not support a PER or FER, the minimum performance level shall be no loss of wireless transmission function needed for the intended use of the equipment.

4.3 Electrostatic Discharge (ESD)

4.3.1 Test Specification of Electrostatic Discharge (ESD)

Basic Standard	EN 61000-4-2
Discharge Voltage	Contact Discharge: ± 2 kV / ± 4 kV Air Discharge: ± 2 kV / ± 4 kV / ± 8 kV
Discharge Impedance	330 ohm / 150 pF
Number of Discharge	Air Discharge: minimum 20 times at each test point Contact Discharge: minimum 20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second minimum

4.3.2 Test Procedures

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 kPa (860 mbar) to 106 kPa (1060 mbar).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with both air discharge and contact discharge. On preselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On preselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be determined whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted:
 - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

4.3.4 Test Result of Electrostatic Discharge (ESD)

Test Site	ES01-WS	Ambient Condition	23°C/50%/99kPa
Tested By	Sheon Tu		

Test Mode	1, 2, 4, 5				
Indirect Application					
Test Voltage (kV)	Polarity	Test Point	Horizontal Coupling Plane (HCP)	Vertical Coupling Plane (VCP)	Performance Criteria
2, 4	+/-	At front, rear, left and right side	Note	Note	A

Note: There was no abnormal situation during the test compared with initial operation.

Test Mode	3				
Direct Application					
Test Voltage (kV)	Polarity	Test Point	Contact Discharge	Air Discharge	Performance Criteria
2, 4, 8	+/-	1	N/A	Note	A
Indirect Application					
Test Voltage (kV)	Polarity	Test Point	Horizontal Coupling Plane (HCP)	Vertical Coupling Plane (VCP)	Performance Criteria
2, 4	+/-	At front, rear, left and right side	Note	Note	A

Note: There was no abnormal situation during the test compared with initial operation.

4.3.5 Test Point Photo

Test Mode 3



4.4 Radio Frequency Electromagnetic Field (RS)

4.4.1 Test Specification of Radio Frequency Electromagnetic Field (RS)

Basic Standard	EN 61000-4-3
Frequency Range	80 MHz ~ 6000 MHz
Field Strength	3 V/m
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of preceding frequency value
Polarity of Antenna	Horizontal and Vertical
Antenna Height	1.5 m
Antenna Distance	80 MHz ~ 1000 MHz: 3 m 1000 MHz ~ 6000 MHz: 1 m
Dwell Time	3 seconds

4.4.2 Test Procedures

- The test level shall be 3 V/m (measured unmodulated). The test signal shall be amplitude modulated to a depth of 80 % by a sinusoidal audio signal of 1000 Hz. If the wanted signal is modulated at 1000 Hz, then an audio signal of 400 Hz shall be used.
- The test shall be performed over the frequency range 80 MHz to 6000 MHz with the exception of the exclusion band for transmitters, receivers and duplex transceivers, as appropriate.
- For receivers and transmitters the stepped frequency increments shall be 1 % frequency increment of the momentary used frequency, unless specified otherwise in the part of EN 301 489 series dealing with the relevant type of radio equipment.
- Further product related spot frequency tests may be specified in the relevant part of EN 301 489 series dealing with the particular type of radio equipment.
- Responses on receivers occurring at discrete frequencies, which are narrow band responses, shall be disregarded from the test.
- The frequencies selected and used during the test shall be recorded in the test report.
- When testing at frequencies above 1 GHz, the test distance shall be 1 m when using the independent windows method. Compliance with the field uniformity requirement shall be verified for the selected test distance.
- The alternative method for frequencies above 1 GHz divides the calibration area into a suitable array of 0,5 m × 0,5 m windows such that the whole area to be occupied by the face of the EUT is covered. The field uniformity shall be independently calibrated over each window.
- During the test, at each frequency the forward power shall be applied to the field-generating antenna. The test shall be repeated with the field-generating antenna repositioned to illuminate each of the required windows in turn.

4.4.3 Exclusion bands

The frequencies on which the transmitter part of the EUT is intended to operate shall be excluded from radiated emission measurements when performed in transmit mode of operation.

There shall be no frequency exclusion band applied to emission measurements of the receiver part of transceivers or the stand alone receiver under test, and/or associated ancillary equipment.

The exclusion band for immunity testing of equipment operating in the 2,4 GHz band shall be:

- lower limit of exclusion band = lowest allocated band edge frequency -120 MHz, i.e. 2 280 MHz;
- upper limit of exclusion band = highest allocated band edge frequency +120 MHz, i.e. 2 603,5MHz.


The exclusion band for immunity testing of equipment operating in the 5 GHz Wi-Fi band shall be:

- lower limit of exclusion band = lowest allocated band edge frequency -320 MHz, i.e. 4 830 MHz;
- as the immunity requirements have an upper frequency range of 6 GHz and any upper edge exclusion band would be greater than this for both the 5 470 MHz - 5 725 MHz and 5 725 MHz - 5 850 MHz bands. Therefore the test stops at the lower limit of exclusion band (i.e. 4 830 MHz).

The exclusion band for immunity testing of equipment operating in the 5,8 GHz band shall be:

- lower limit of exclusion band = lowest allocated band edge frequency -440 MHz, i.e. 5 285 MHz;
- as the immunity requirements have an upper frequency range of 6 GHz and any upper edge exclusion band would be greater than this for the 5,8 GHz band. The above frequency shall also be regarded as the upper end of the test range.

4.4.4 Test Setup

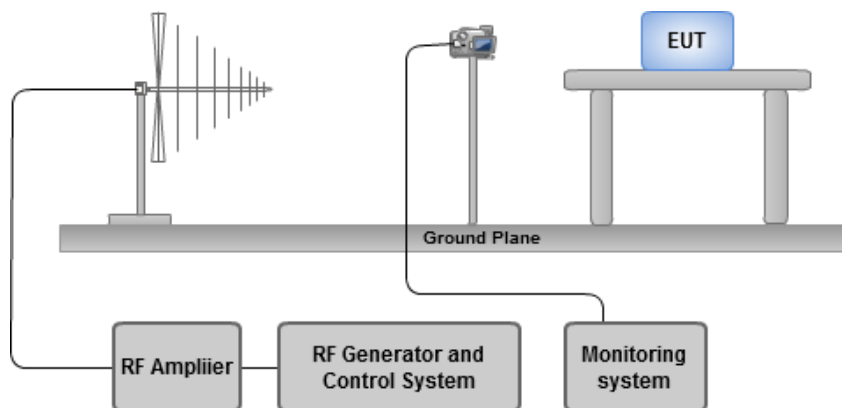

Note: The procedure defined in this part requires the generation of electromagnetic fields within which the test sample is placed and its operation observed. To generate fields that are useful for simulation of actual (field) conditions may require significant antenna drive power and the resultant high field strength levels. To comply with local regulations and to prevent biological hazards to the testing personnel, it is recommended that these tests be carried out in a shielded enclosure or semi-anechoic chamber.

5 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345


Email: ICC_Service@icertifi.com.tw

==END==

**Summary**

Mode	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition
Mode 1	AV	3.244M	26.08	46.00	-19.92	9.81	Neutral
Mode 2	AV	3.362M	25.30	46.00	-20.70	9.82	Line
Mode 3	AV	3.701M	24.60	46.00	-21.40	9.82	Line
Mode 4	AV	3.309M	25.54	46.00	-20.46	9.82	Neutral
Mode 5	QP	151.202k	56.30	65.92	-9.62	9.69	Neutral


Mode 1

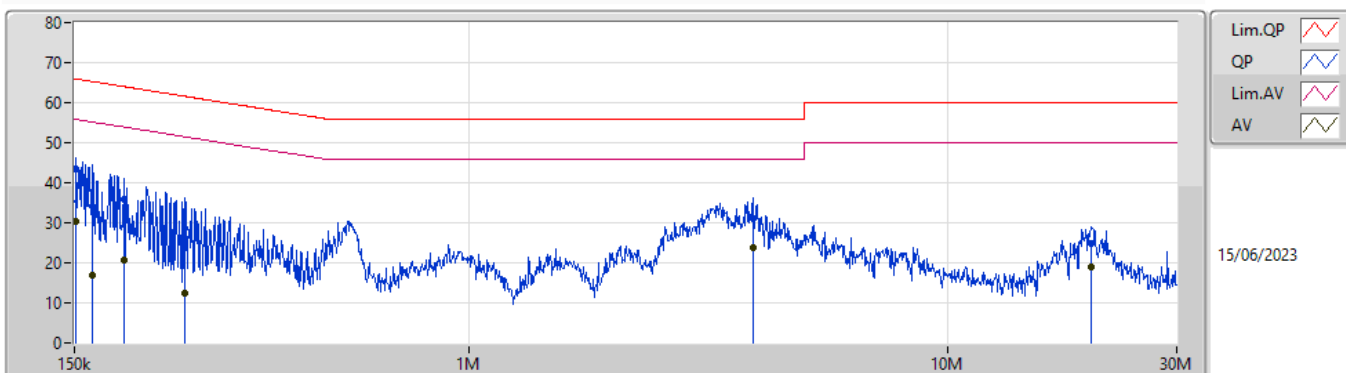

Model: BT20820
Sample No: E01
Power: 230V/50Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	151.202k	43.57	65.92	-22.35	9.69	Line	-	33.88	9.63	0.06	-			
AV	151.202k	30.21	55.92	-25.71	9.69	Line	-	20.52	9.63	0.06	-			
QP	163.117k	34.22	65.31	-31.09	9.69	Line	-	24.53	9.63	0.06	-			
AV	163.117k	17.02	55.31	-38.29	9.69	Line	-	7.33	9.63	0.06	-			
QP	190.596k	35.92	64.01	-28.09	9.68	Line	-	26.24	9.62	0.06	-			
AV	190.596k	20.55	54.01	-33.46	9.68	Line	-	10.87	9.62	0.06	-			
QP	255.079k	28.68	61.58	-32.90	9.68	Line	-	19.00	9.62	0.06	-			
AV	255.079k	12.27	51.58	-39.31	9.68	Line	-	2.59	9.62	0.06	-			
QP	3.913M	31.02	56.00	-24.98	9.83	Line	-	21.19	9.65	0.18	-			
AV	3.913M	23.81	46.00	-22.19	9.83	Line	"Worst"	13.98	9.65	0.18	-			
QP	19.948M	24.67	60.00	-35.33	10.19	Line	-	14.48	9.68	0.51	-			
AV	19.948M	19.00	50.00	-31.00	10.19	Line	-	8.81	9.68	0.51	-			


Mode 1

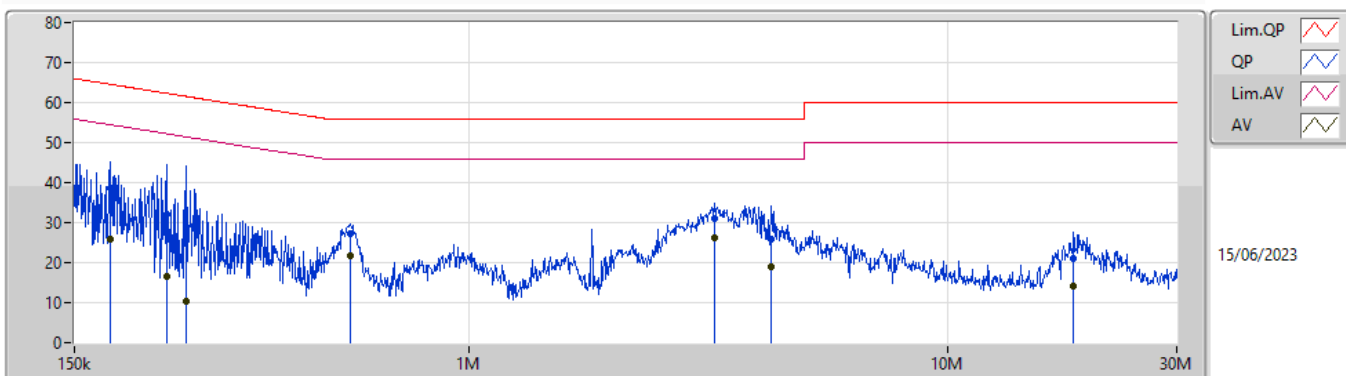

Model:BT20820
Sample No:E01
Power:230V/50Hz
Test by:Joe Liao
Temperature:23°C
Humidity:64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	178.803k	38.76	64.55	-25.79	9.68	Neutral	-	29.08	9.62	0.06	-			
AV	178.803k	25.79	54.55	-28.76	9.68	Neutral	-	16.11	9.62	0.06	-			
QP	233.633k	32.21	62.31	-30.10	9.68	Neutral	-	22.53	9.62	0.06	-			
AV	233.633k	16.48	52.31	-35.83	9.68	Neutral	-	6.80	9.62	0.06	-			
QP	256.1k	26.05	61.56	-35.51	9.68	Neutral	-	16.37	9.62	0.06	-			
AV	256.1k	10.42	51.56	-41.14	9.68	Neutral	-	0.74	9.62	0.06	-			
QP	564.526k	27.39	56.00	-28.61	9.70	Neutral	-	17.69	9.62	0.08	-			
AV	564.526k	21.70	46.00	-24.30	9.70	Neutral	-	12.00	9.62	0.08	-			
QP	3.244M	31.20	56.00	-24.80	9.81	Neutral	-	21.39	9.65	0.16	-			
AV	3.244M	26.08	46.00	-19.92	9.81	Neutral	"Worst"	16.27	9.65	0.16	-			
QP	4.272M	25.84	56.00	-30.16	9.84	Neutral	-	16.00	9.65	0.19	-			
AV	4.272M	18.96	46.00	-27.04	9.84	Neutral	-	9.12	9.65	0.19	-			
QP	18.27M	21.20	60.00	-38.80	10.28	Neutral	-	10.92	9.79	0.49	-			
AV	18.27M	14.25	50.00	-35.75	10.28	Neutral	-	3.97	9.79	0.49	-			


Mode 2

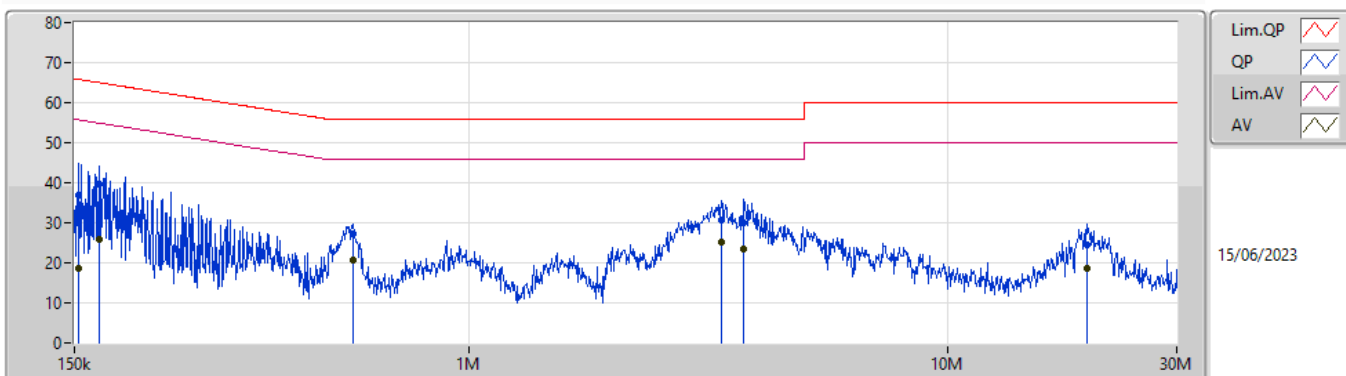

Model: BT20820
Sample No: E02
Power: 230V/50Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	153.024k	36.83	65.83	-29.00	9.69	Line	-	27.14	9.63	0.06	-			
AV	153.024k	18.75	55.83	-37.08	9.69	Line	-	9.06	9.63	0.06	-			
QP	169.084k	39.61	65.01	-25.40	9.69	Line	-	29.92	9.63	0.06	-			
AV	169.084k	25.98	55.01	-29.03	9.69	Line	-	16.29	9.63	0.06	-			
QP	571.327k	27.29	56.00	-28.71	9.70	Line	-	17.59	9.62	0.08	-			
AV	571.327k	20.85	46.00	-25.15	9.70	Line	-	11.15	9.62	0.08	-			
QP	3.362M	30.79	56.00	-25.21	9.82	Line	-	20.97	9.65	0.17	-			
AV	3.362M	25.30	46.00	-20.70	9.82	Line	"Worst"	15.48	9.65	0.17	-			
QP	3.745M	30.04	56.00	-25.96	9.83	Line	-	20.21	9.65	0.18	-			
AV	3.745M	23.60	46.00	-22.40	9.83	Line	-	13.77	9.65	0.18	-			
QP	19.553M	24.53	60.00	-35.47	10.18	Line	-	14.35	9.68	0.50	-			
AV	19.553M	18.61	50.00	-31.39	10.18	Line	-	8.43	9.68	0.50	-			


Mode 2

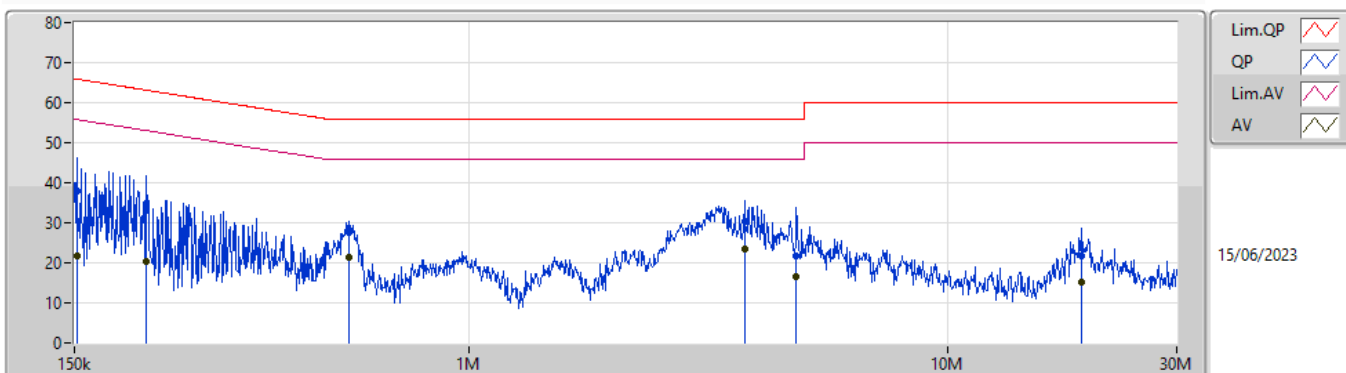

Model: BT20820
Sample No: E02
Power: 230V/50Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	151.807k	38.07	65.90	-27.83	9.69	Neutral	-	28.38	9.63	0.06	-			
AV	151.807k	21.69	55.90	-34.21	9.69	Neutral	-	12.00	9.63	0.06	-			
QP	212.287k	34.75	63.11	-28.36	9.68	Neutral	-	25.07	9.62	0.06	-			
AV	212.287k	20.40	53.11	-32.71	9.68	Neutral	-	10.72	9.62	0.06	-			
QP	562.277k	27.72	56.00	-28.28	9.70	Neutral	-	18.02	9.62	0.08	-			
AV	562.277k	21.44	46.00	-24.56	9.70	Neutral	-	11.74	9.62	0.08	-			
QP	3.76M	30.22	56.00	-25.78	9.83	Neutral	-	20.39	9.65	0.18	-			
AV	3.76M	23.50	46.00	-22.50	9.83	Neutral	"Worst"	13.67	9.65	0.18	-			
QP	4.816M	21.62	56.00	-34.38	9.88	Neutral	-	11.74	9.66	0.22	-			
AV	4.816M	16.52	46.00	-29.48	9.88	Neutral	-	6.64	9.66	0.22	-			
QP	19.014M	21.77	60.00	-38.23	10.29	Neutral	-	11.48	9.79	0.50	-			
AV	19.014M	15.21	50.00	-34.79	10.29	Neutral	-	4.92	9.79	0.50	-			


Mode 3

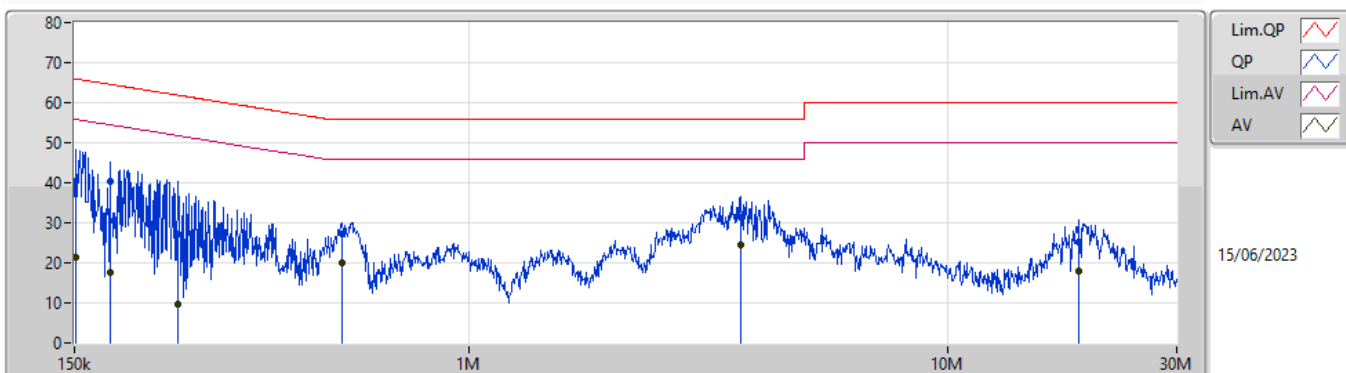

Model: BT20820
Sample No: E03
Power: 230V/50Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	151.202k	40.39	65.92	-25.53	9.69	Line	-	30.70	9.63	0.06	-			
AV	151.202k	21.27	55.92	-34.65	9.69	Line	-	11.58	9.63	0.06	-			
QP	178.091k	40.18	64.57	-24.39	9.68	Line	-	30.50	9.62	0.06	-			
AV	178.091k	17.63	54.57	-36.94	9.68	Line	-	7.95	9.62	0.06	-			
QP	246.077k	27.09	61.89	-34.80	9.68	Line	-	17.41	9.62	0.06	-			
AV	246.077k	9.50	51.89	-42.39	9.68	Line	-	-0.18	9.62	0.06	-			
QP	542.434k	27.29	56.00	-28.71	9.70	Line	-	17.59	9.62	0.08	-			
AV	542.434k	19.98	46.00	-26.02	9.70	Line	-	10.28	9.62	0.08	-			
QP	3.701M	31.32	56.00	-24.68	9.82	Line	-	21.50	9.65	0.17	-			
AV	3.701M	24.60	46.00	-21.40	9.82	Line	"Worst"	14.78	9.65	0.17	-			
QP	18.713M	25.28	60.00	-34.72	10.17	Line	-	15.11	9.68	0.49	-			
AV	18.713M	18.01	50.00	-31.99	10.17	Line	-	7.84	9.68	0.49	-			


Mode 3

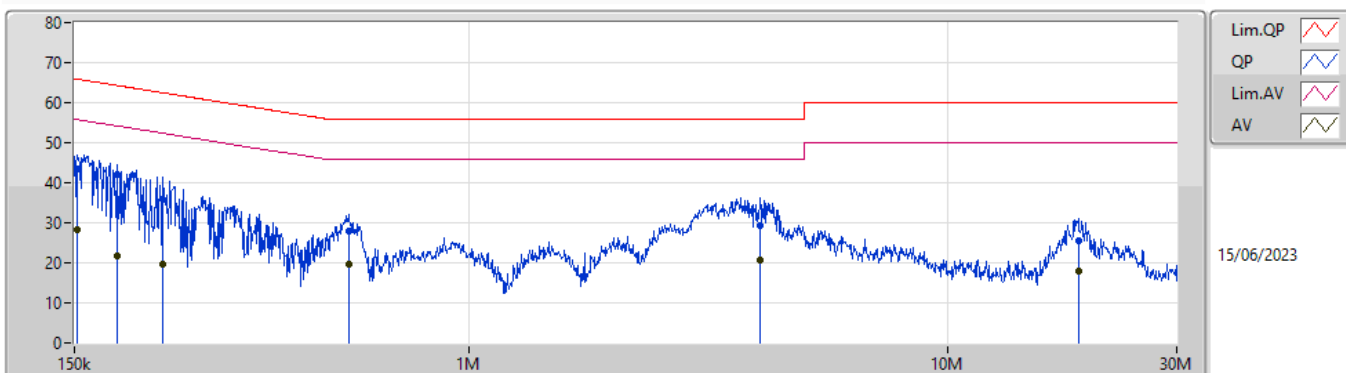

Model: BT20820
Sample No: E03
Power: 230V/50Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	151.807k	43.31	65.90	-22.59	9.69	Neutral	-	33.62	9.63	0.06	-			
AV	151.807k	28.44	55.90	-27.46	9.69	Neutral	-	18.75	9.63	0.06	-			
QP	183.87k	41.91	64.30	-22.39	9.68	Neutral	"Worst"	32.23	9.62	0.06	-			
AV	183.87k	21.61	54.30	-32.69	9.68	Neutral	-	11.93	9.62	0.06	-			
QP	229.932k	35.72	62.44	-26.72	9.68	Neutral	-	26.04	9.62	0.06	-			
AV	229.932k	19.57	52.44	-32.87	9.68	Neutral	-	9.89	9.62	0.06	-			
QP	560.037k	27.94	56.00	-28.06	9.70	Neutral	-	18.24	9.62	0.08	-			
AV	560.037k	19.55	46.00	-26.45	9.70	Neutral	-	9.85	9.62	0.08	-			
QP	4.056M	29.21	56.00	-26.79	9.83	Neutral	-	19.38	9.65	0.18	-			
AV	4.056M	20.66	46.00	-25.34	9.83	Neutral	-	10.83	9.65	0.18	-			
QP	18.713M	25.41	60.00	-34.59	10.28	Neutral	-	15.13	9.79	0.49	-			
AV	18.713M	17.93	50.00	-32.07	10.28	Neutral	-	7.65	9.79	0.49	-			


Mode 4

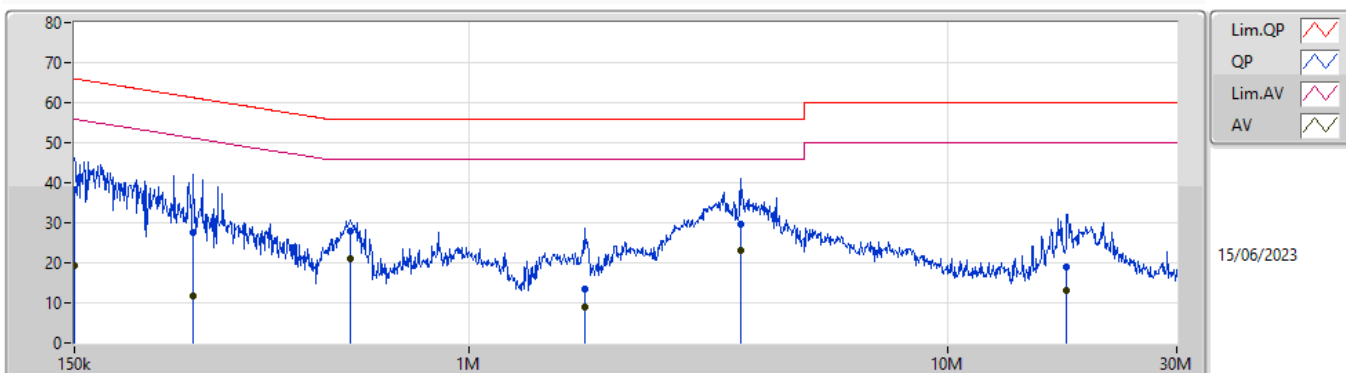

Model: BT20820
Sample No: E04
Power: 230V/50Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150k	38.32	66.00	-27.68	9.69	Line	-	28.63	9.63	0.06	-			
AV	150k	19.43	56.00	-36.57	9.69	Line	-	9.74	9.63	0.06	-			
QP	265.468k	27.53	61.26	-33.73	9.68	Line	-	17.85	9.62	0.06	-			
AV	265.468k	11.83	51.26	-39.43	9.68	Line	-	2.15	9.62	0.06	-			
QP	566.784k	28.05	56.00	-27.95	9.70	Line	-	18.35	9.62	0.08	-			
AV	566.784k	21.06	46.00	-24.94	9.70	Line	-	11.36	9.62	0.08	-			
QP	1.74M	13.38	56.00	-42.62	9.77	Line	-	3.61	9.64	0.13	-			
AV	1.74M	9.06	46.00	-36.94	9.77	Line	-	-0.71	9.64	0.13	-			
QP	3.701M	29.70	56.00	-26.30	9.82	Line	-	19.88	9.65	0.17	-			
AV	3.701M	23.26	46.00	-22.74	9.82	Line	"Worst"	13.44	9.65	0.17	-			
QP	17.696M	19.01	60.00	-40.99	10.16	Line	-	8.85	9.68	0.48	-			
AV	17.696M	13.07	50.00	-36.93	10.16	Line	-	2.91	9.68	0.48	-			


Mode 4

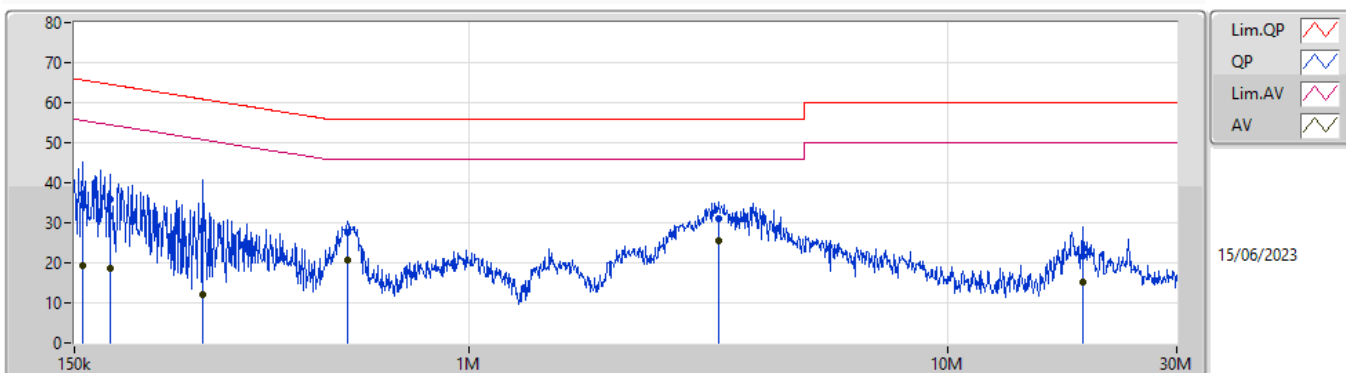

Model: BT20820
Sample No: E04
Power: 230V/50Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	156.109k	37.09	65.67	-28.58	9.69	Neutral	-	27.40	9.63	0.06	-			
AV	156.109k	19.44	55.67	-36.23	9.69	Neutral	-	9.75	9.63	0.06	-			
QP	178.091k	35.80	64.57	-28.77	9.68	Neutral	-	26.12	9.62	0.06	-			
AV	178.091k	18.47	54.57	-36.10	9.68	Neutral	-	8.79	9.62	0.06	-			
QP	278.495k	28.47	60.86	-32.39	9.68	Neutral	-	18.79	9.62	0.06	-			
AV	278.495k	12.21	50.86	-38.65	9.68	Neutral	-	2.53	9.62	0.06	-			
QP	557.805k	27.42	56.00	-28.58	9.70	Neutral	-	17.72	9.62	0.08	-			
AV	557.805k	20.81	46.00	-25.19	9.70	Neutral	-	11.11	9.62	0.08	-			
QP	3.309M	31.14	56.00	-24.86	9.82	Neutral	-	21.32	9.65	0.17	-			
AV	3.309M	25.54	46.00	-20.46	9.82	Neutral	"Worst"	15.72	9.65	0.17	-			
QP	19.167M	21.62	60.00	-38.38	10.29	Neutral	-	11.33	9.79	0.50	-			
AV	19.167M	15.18	50.00	-34.82	10.29	Neutral	-	4.89	9.79	0.50	-			


Mode 5

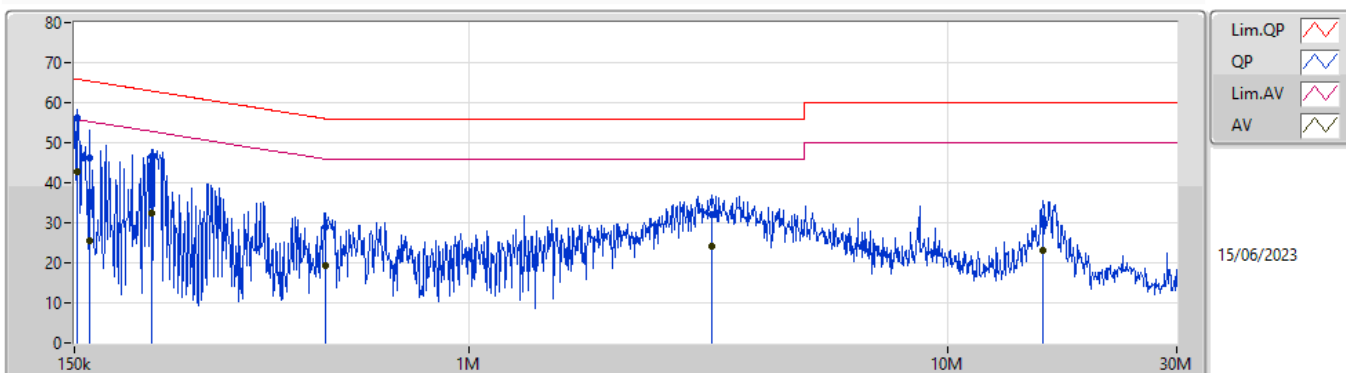

Model: BT20820
Sample No: E03
Power: 110V/60Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	152.414k	56.09	65.87	-9.78	9.69	Line	"Worst"	46.40	9.63	0.06	-			
AV	152.414k	42.88	55.87	-12.99	9.69	Line	-	33.19	9.63	0.06	-			
QP	161.175k	46.31	65.41	-19.10	9.69	Line	-	36.62	9.63	0.06	-			
AV	161.175k	25.66	55.41	-29.75	9.69	Line	-	15.97	9.63	0.06	-			
QP	217.434k	46.72	62.92	-16.20	9.68	Line	-	37.04	9.62	0.06	-			
AV	217.434k	32.47	52.92	-20.45	9.68	Line	-	22.79	9.62	0.06	-			
QP	500k	28.98	56.00	-27.02	9.69	Line	-	19.29	9.62	0.07	-			
AV	500k	19.31	46.00	-26.69	9.69	Line	-	9.62	9.62	0.07	-			
QP	3.218M	32.01	56.00	-23.99	9.81	Line	-	22.20	9.65	0.16	-			
AV	3.218M	24.31	46.00	-21.69	9.81	Line	-	14.50	9.65	0.16	-			
QP	15.762M	30.98	60.00	-29.02	10.13	Line	-	20.85	9.68	0.45	-			
AV	15.762M	23.27	50.00	-26.73	10.13	Line	-	13.14	9.68	0.45	-			

Mode 5

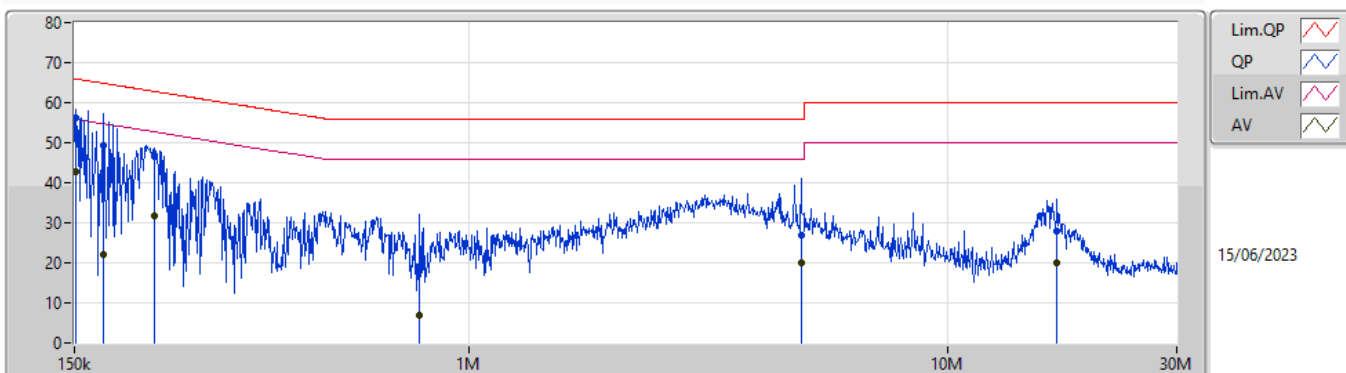

Model: BT20820
Sample No: E03
Power: 110V/60Hz
Test by: Joe Liao
Temperature: 23°C
Humidity: 64%
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	151.202k	56.30	65.92	-9.62	9.69	Neutral	"Worst"	46.61	9.63	0.06	-			
AV	151.202k	42.68	55.92	-13.24	9.69	Neutral	-	32.99	9.63	0.06	-			
QP	172.493k	49.23	64.83	-15.60	9.69	Neutral	-	39.54	9.63	0.06	-			
AV	172.493k	21.98	54.83	-32.85	9.69	Neutral	-	12.29	9.63	0.06	-			
QP	220.933k	46.42	62.79	-16.37	9.68	Neutral	-	36.74	9.62	0.06	-			
AV	220.933k	31.74	52.79	-21.05	9.68	Neutral	-	22.06	9.62	0.06	-			
QP	789.434k	18.93	56.00	-37.07	9.73	Neutral	-	9.20	9.63	0.10	-			
AV	789.434k	6.94	46.00	-39.06	9.73	Neutral	-	-2.79	9.63	0.10	-			
QP	4.933M	26.81	56.00	-29.19	9.88	Neutral	-	16.93	9.66	0.22	-			
AV	4.933M	19.88	46.00	-26.12	9.88	Neutral	-	10.00	9.66	0.22	-			
QP	16.868M	27.95	60.00	-32.05	10.25	Neutral	-	17.70	9.78	0.47	-			
AV	16.868M	19.84	50.00	-30.16	10.25	Neutral	-	9.59	9.78	0.47	-			




Summary

Mode	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Condition	Azimuth (°)	Height (m)
Mode 1	PK	424.85M	39.95	47.00	-7.05	-3.56	Horizontal	-	-



Mode 1

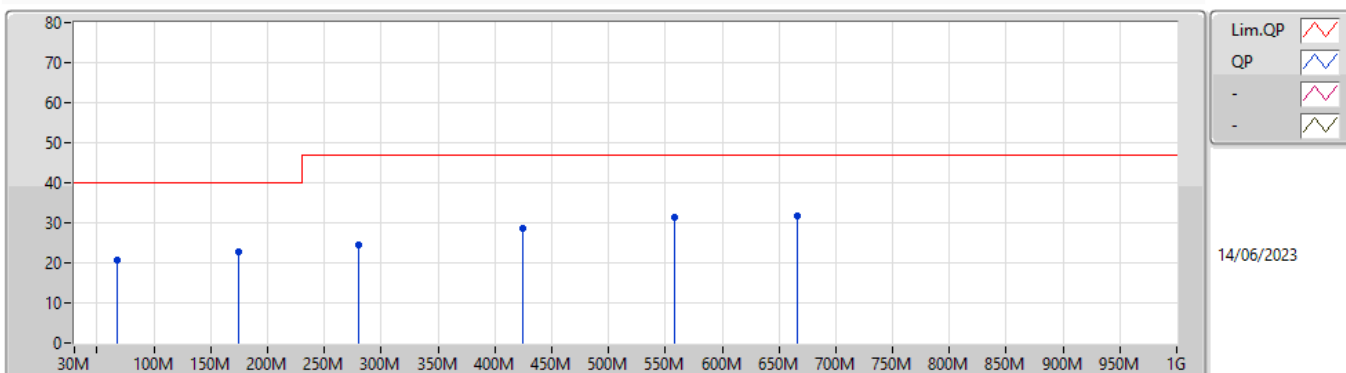


Model:BT20820
Sample No:E01
Test By:Joe Liao
Temperature:22
Humidity:59
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	67.65M	20.62	40.00	-19.38	-10.36	3	Vertical	-	-	-	30.98	16.96	0.89	28.21
PK	174.55M	22.93	40.00	-17.07	-10.07	3	Vertical	-	-	-	33.00	16.90	1.44	28.41
PK	280.35M	24.45	47.00	-22.55	-8.18	3	Vertical	-	-	-	32.63	18.21	1.99	28.38
PK	424.45M	28.75	47.00	-18.25	-3.57	3	Vertical	-	-	-	32.32	21.59	3.04	28.20
PK	558.05M	31.44	47.00	-15.56	-0.90	3	Vertical	-	-	-	32.34	23.86	3.29	28.05
PK	665.95M	31.77	47.00	-15.23	1.49	3	Vertical	-	-	"Worst"	30.28	25.92	3.47	27.90



Mode 1

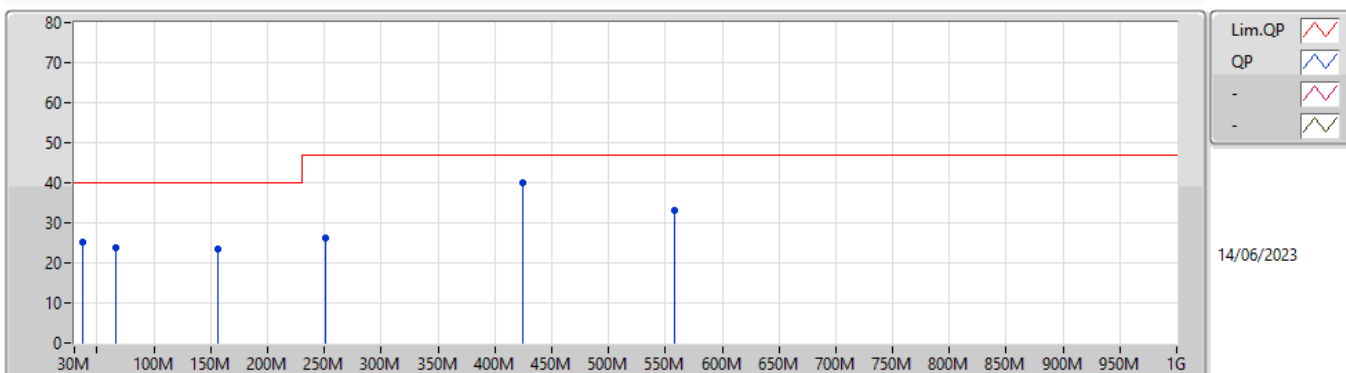

Model:BT20820
Sample No:E01
Test By:Joe Liao
Temperature:22
Humidity:59
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	37.75M	25.34	40.00	-14.66	-9.77	3	Horizontal	-	-	-	35.11	17.77	0.54	28.08
PK	66M	23.95	40.00	-16.05	-10.52	3	Horizontal	-	-	-	34.47	16.80	0.88	28.20
PK	156.25M	23.60	40.00	-16.40	-8.96	3	Horizontal	-	-	-	32.56	18.10	1.34	28.40
PK	250.75M	26.06	47.00	-20.94	-7.96	3	Horizontal	-	-	-	34.02	18.60	1.84	28.40
PK	424.85M	39.95	47.00	-7.05	-3.56	3	Horizontal	-	-	"Worst"	43.51	21.60	3.04	28.20
PK	558M	33.00	47.00	-14.00	-0.90	3	Horizontal	-	-	-	33.90	23.86	3.29	28.05




Summary

Mode	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Condition	Azimuth (°)	Height (m)
Mode 1	AV	2.66153G	38.06	54.00	-15.94	-1.43	Vertical	186	1.18



Mode 1

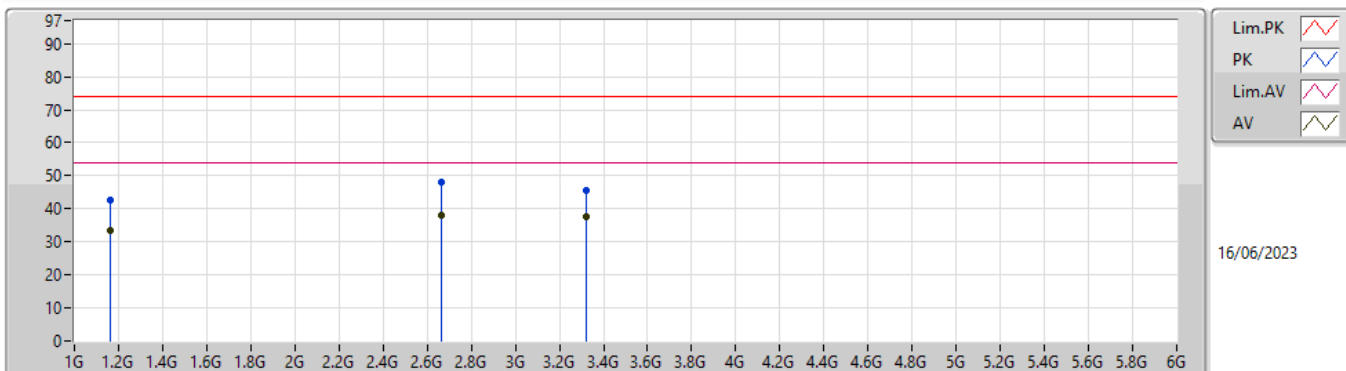


Model:BT20820
Sample No:E01
Test By:Joe Liao
Temperature:22
Humidity:59
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	1.16364G	42.59	74.00	-31.41	-8.30	3	Vertical	154	1.06	-	50.89	25.20	3.00	36.50
AV	1.16364G	33.59	54.00	-20.41	-8.30	3	Vertical	154	1.06	-	41.89	25.20	3.00	36.50
PK	2.66153G	48.13	74.00	-25.87	-1.43	3	Vertical	186	1.18	-	49.56	27.72	4.57	33.72
AV	2.66153G	38.06	54.00	-15.94	-1.43	3	Vertical	186	1.18	"Worst"	39.49	27.72	4.57	33.72
PK	3.3231G	45.49	74.00	-28.51	-0.07	3	Vertical	235	1.24	-	45.56	28.25	4.97	33.29
AV	3.3231G	37.53	54.00	-16.47	-0.07	3	Vertical	235	1.24	-	37.60	28.25	4.97	33.29



Mode 1

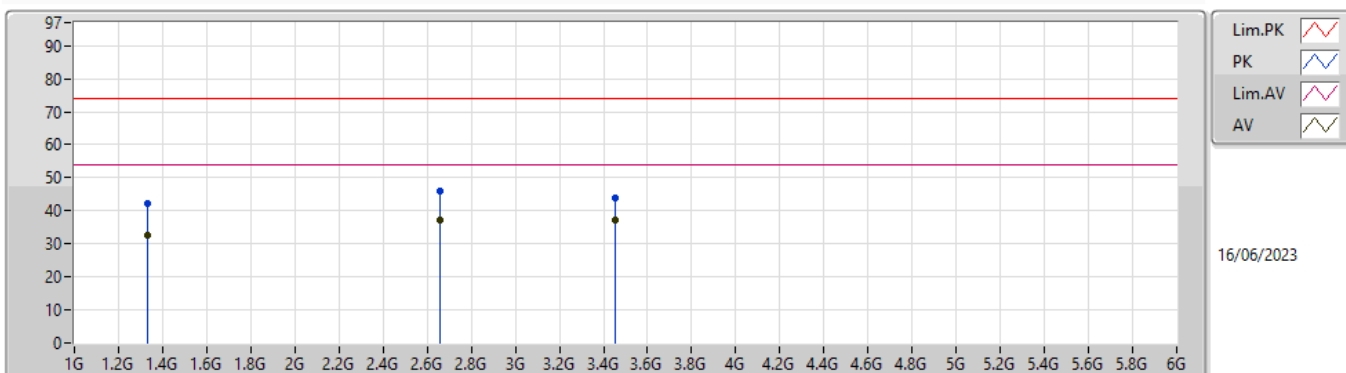


Model:BT20820
Sample No:E01
Test By:Joe Liao
Temperature:22
Humidity:59
Remark1:
Remark2:

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	1.33159G	42.18	74.00	-31.82	-6.41	3	Horizontal	225	1.26	-	48.59	26.20	3.20	35.81
AV	1.33159G	32.75	54.00	-21.25	-6.41	3	Horizontal	225	1.26	-	39.16	26.20	3.20	35.81
PK	2.66084G	46.17	74.00	-27.83	-1.43	3	Horizontal	318	1.00	-	47.60	27.72	4.57	33.72
AV	2.66084G	37.19	54.00	-16.81	-1.43	3	Horizontal	318	1.00	"Worst"	38.62	27.72	4.57	33.72
PK	3.45615G	43.92	74.00	-30.08	0.36	3	Horizontal	143	1.17	-	43.56	28.54	5.02	33.20
AV	3.45615G	37.15	54.00	-16.85	0.36	3	Horizontal	143	1.17	-	36.79	28.54	5.02	33.20


Conducted Emissions from the AC mains power ports (Antenna: NanoBlue)



Conducted Emissions from the AC mains power ports (Antenna: FlexPIFA)

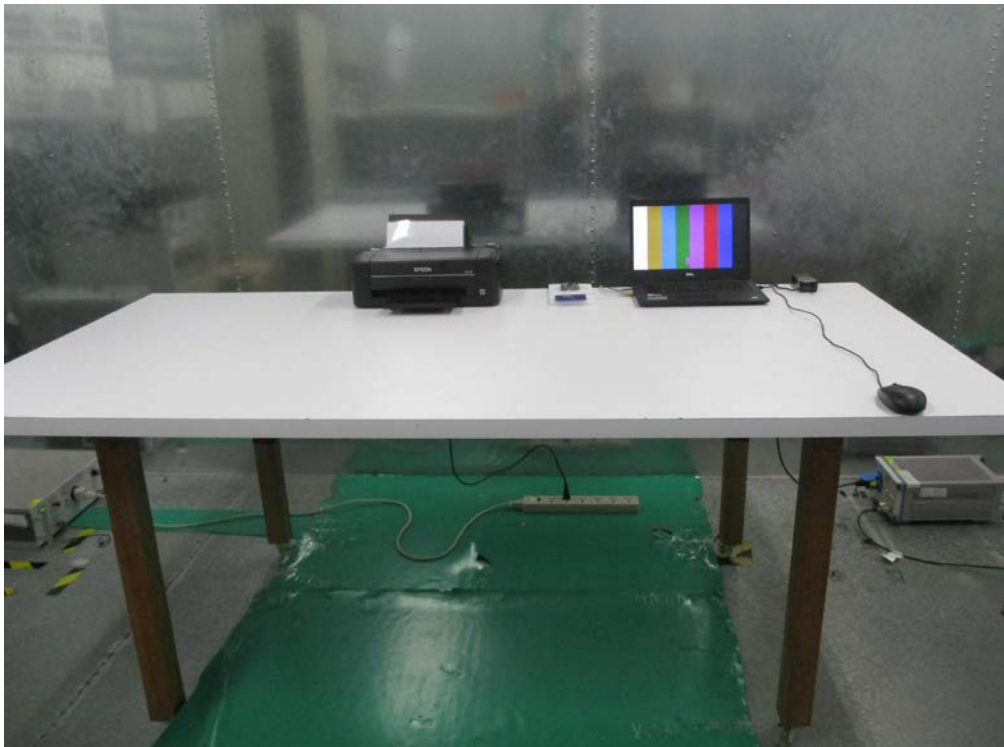


Conducted Emissions from the AC mains power ports (Antenna: EDA-8709-2G4C1-B27-CY)

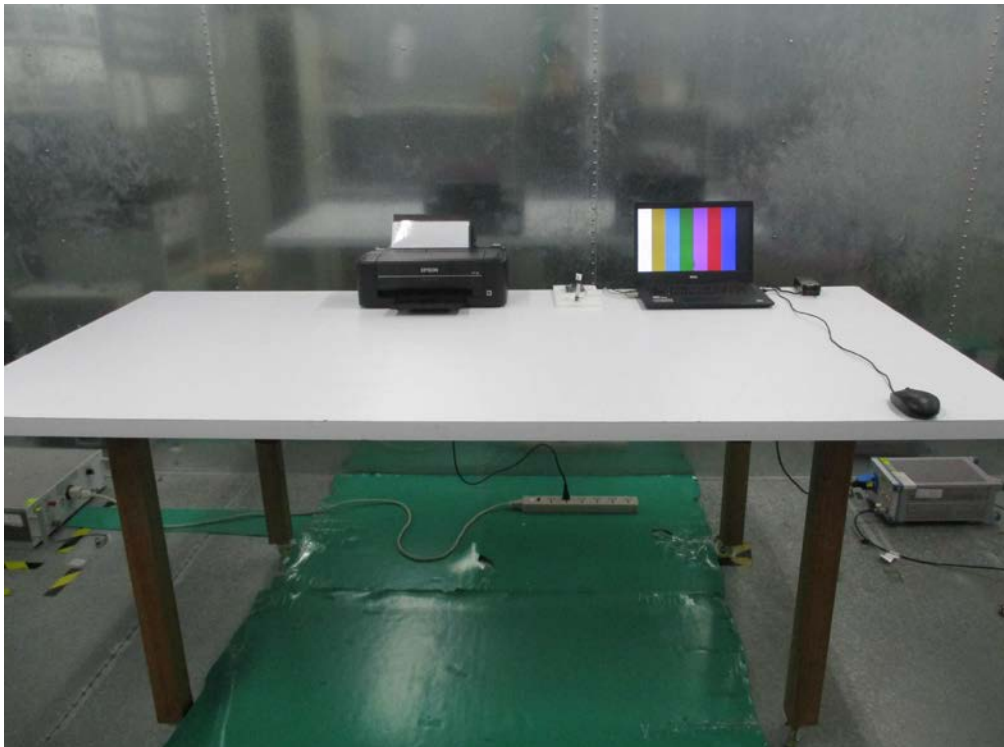



Conducted Emissions from the AC mains power ports (Antenna: mFlexPIFA)





Conducted Emissions from the AC mains power ports (Antenna: AD1608)

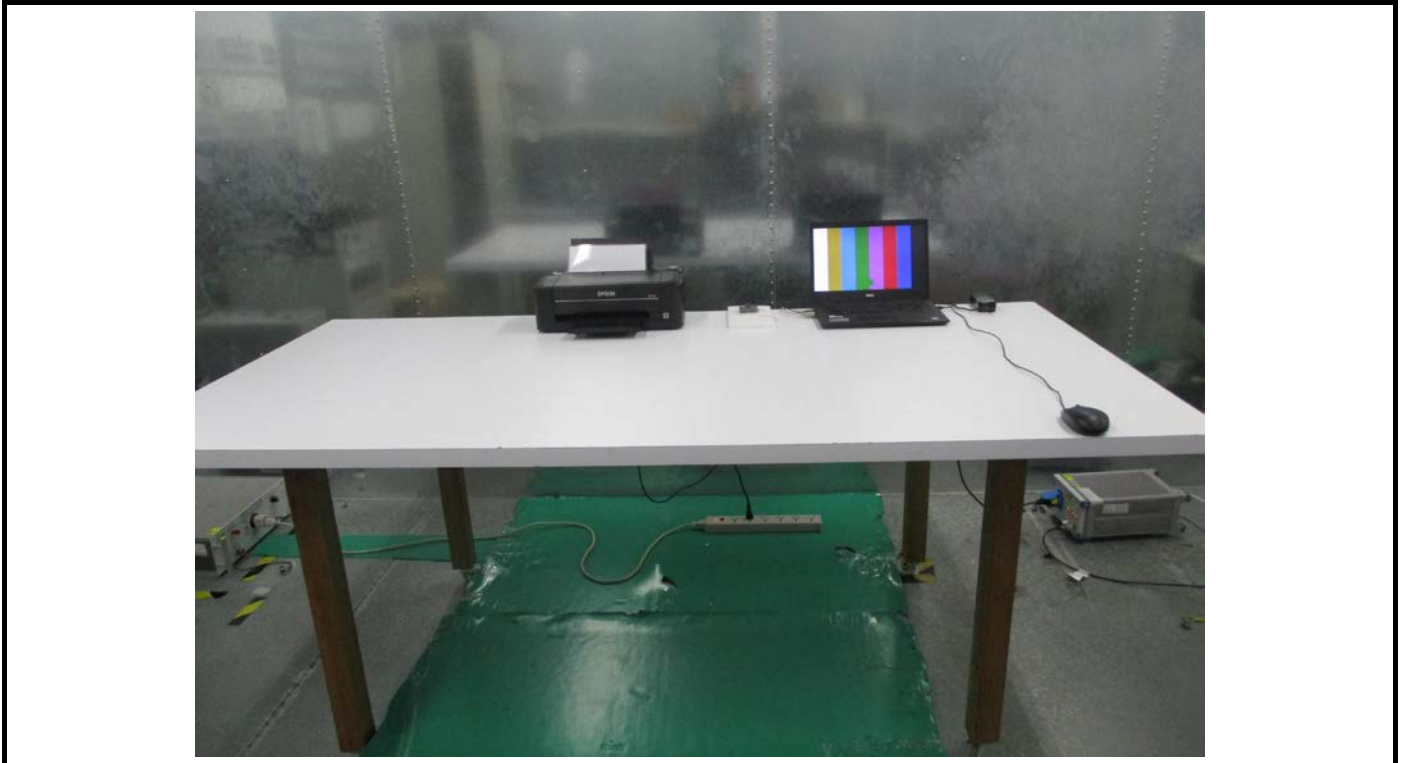

Radiated Emission Below 1GHz Test (Antenna: EDA-8709-2G4C1-B27-CY)

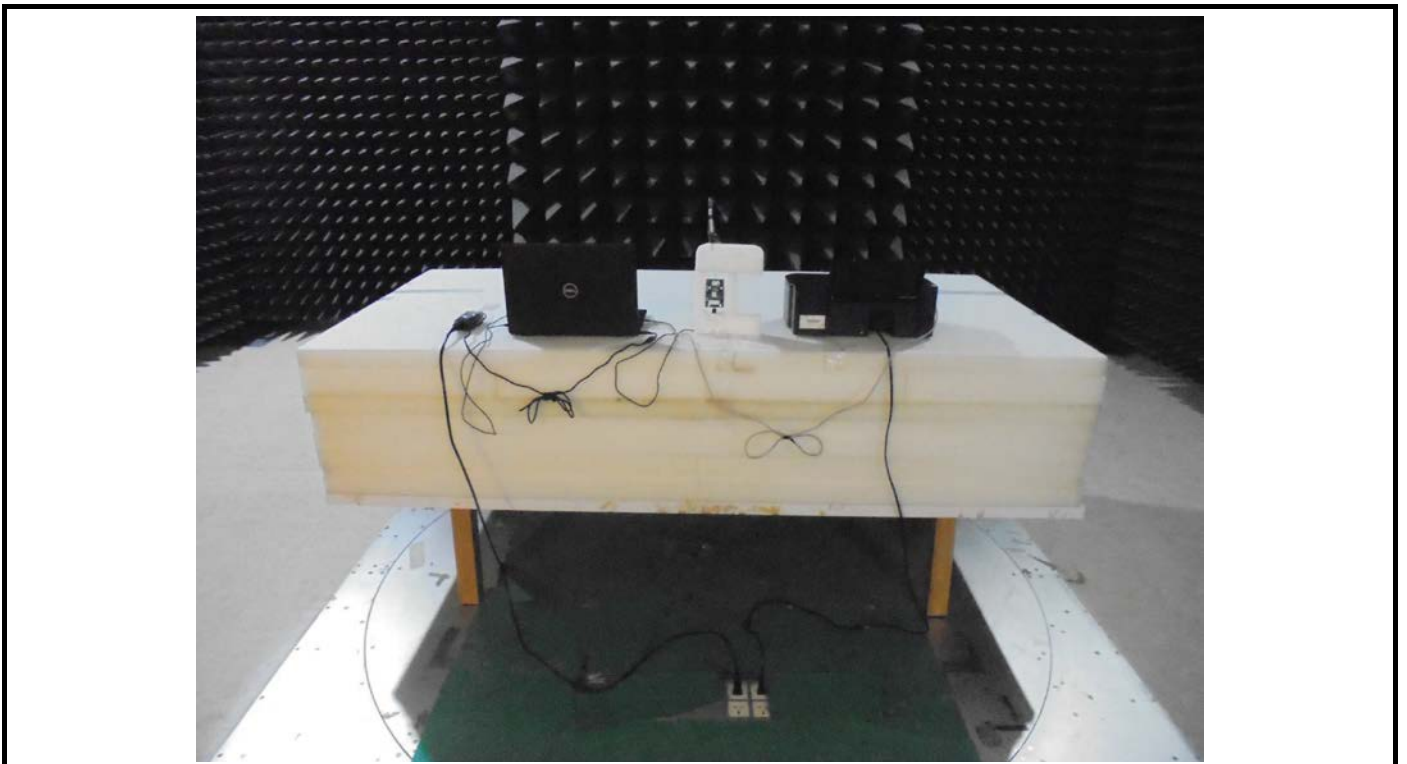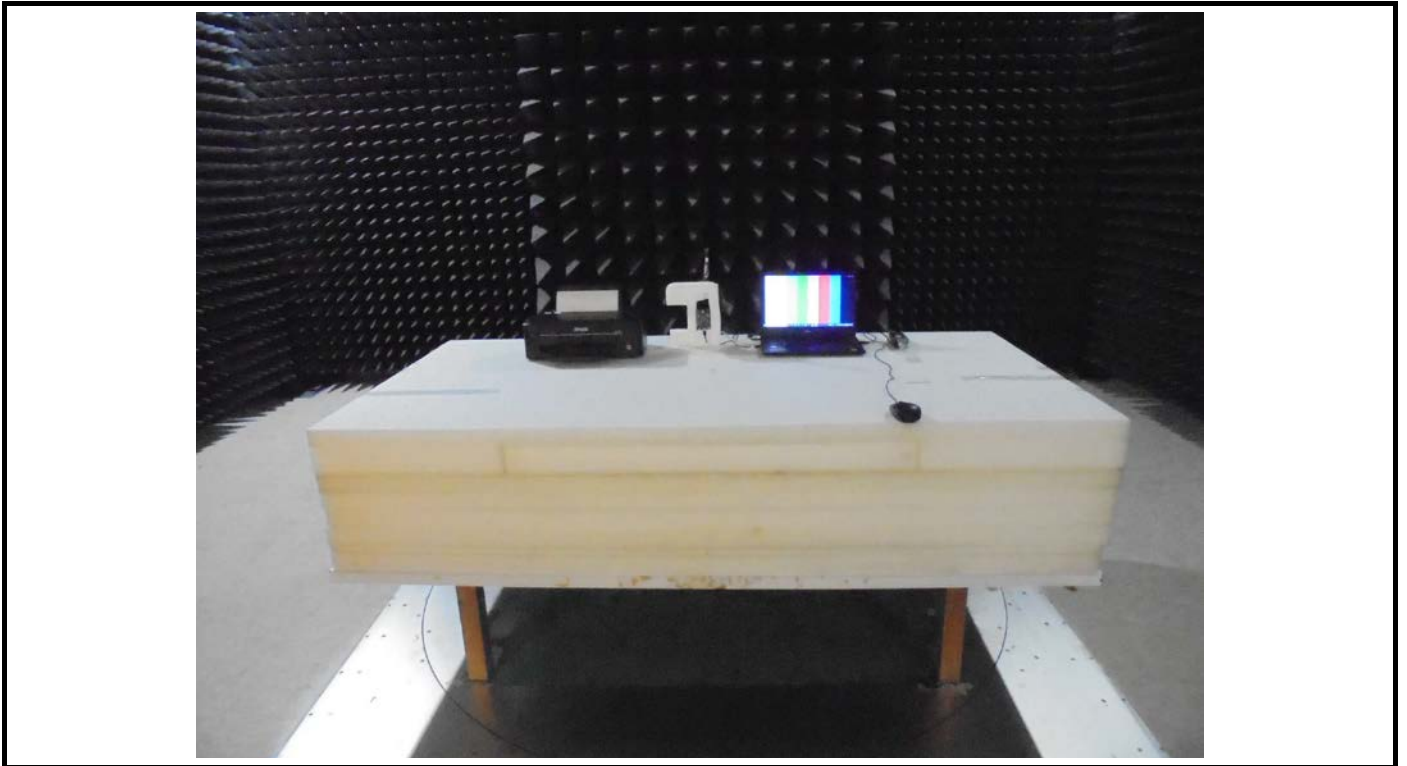

Radiated Emission Above 1GHz Test (Antenna: EDA-8709-2G4C1-B27-CY)

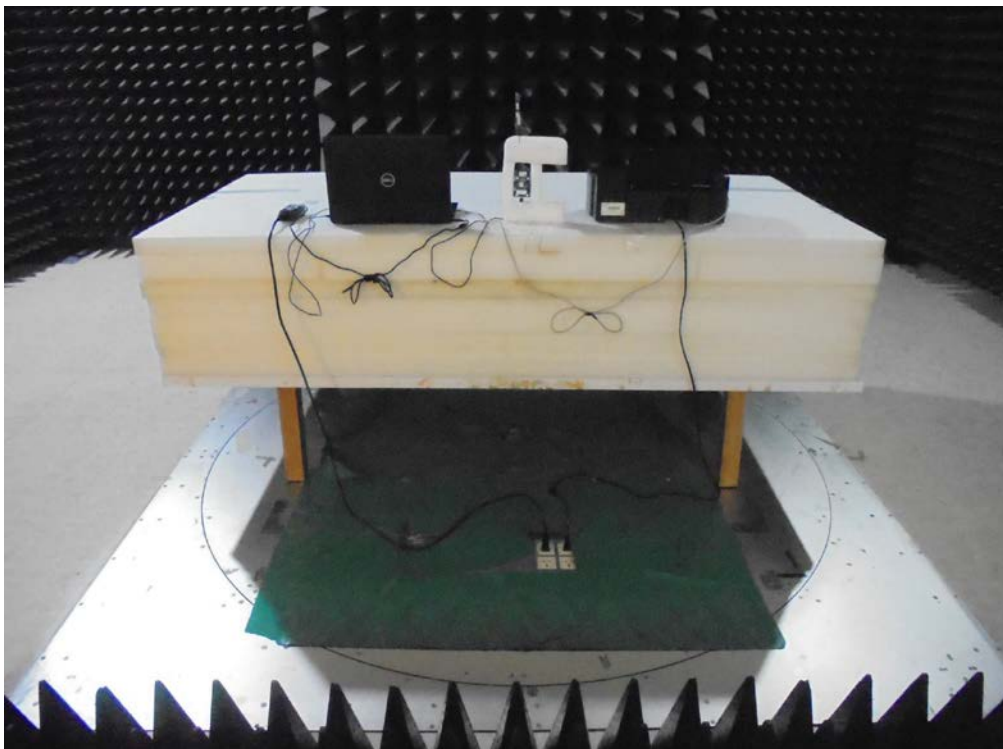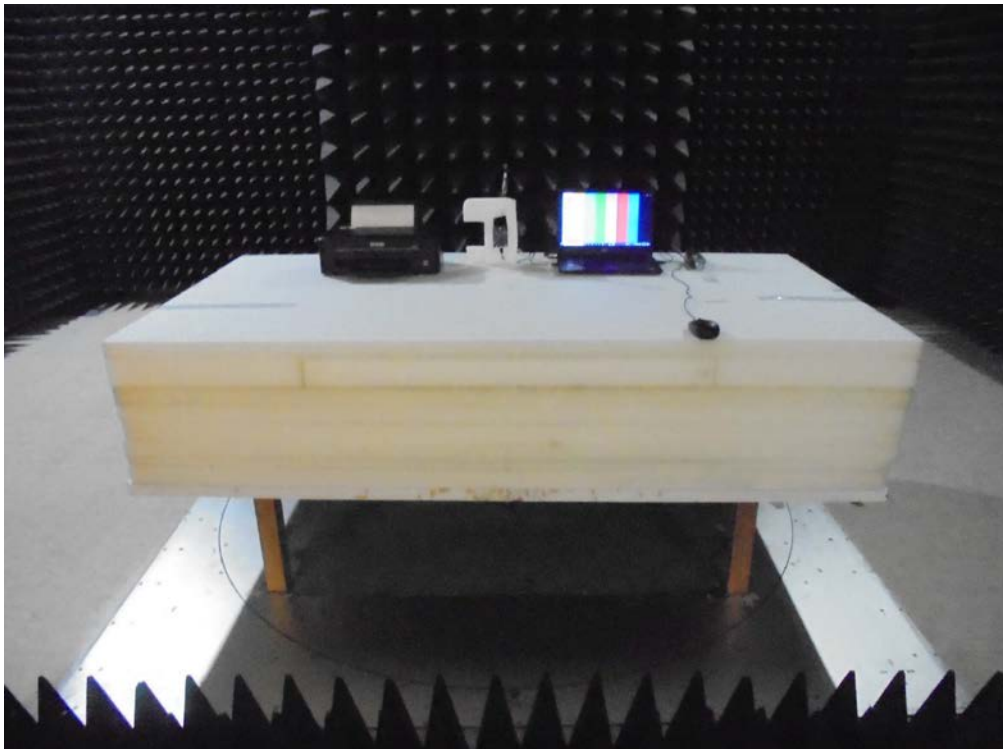

ESD Test (Antenna: NanoBlue)



ESD Test (Antenna: FlexPIFA)



ESD Test (Antenna: EDA-8709-2G4C1-B27-CY)




ESD Test (Antenna: mFlexPIFA)




ESD Test (Antenna: AD1608)




RS Test (Antenna: NanoBlue)

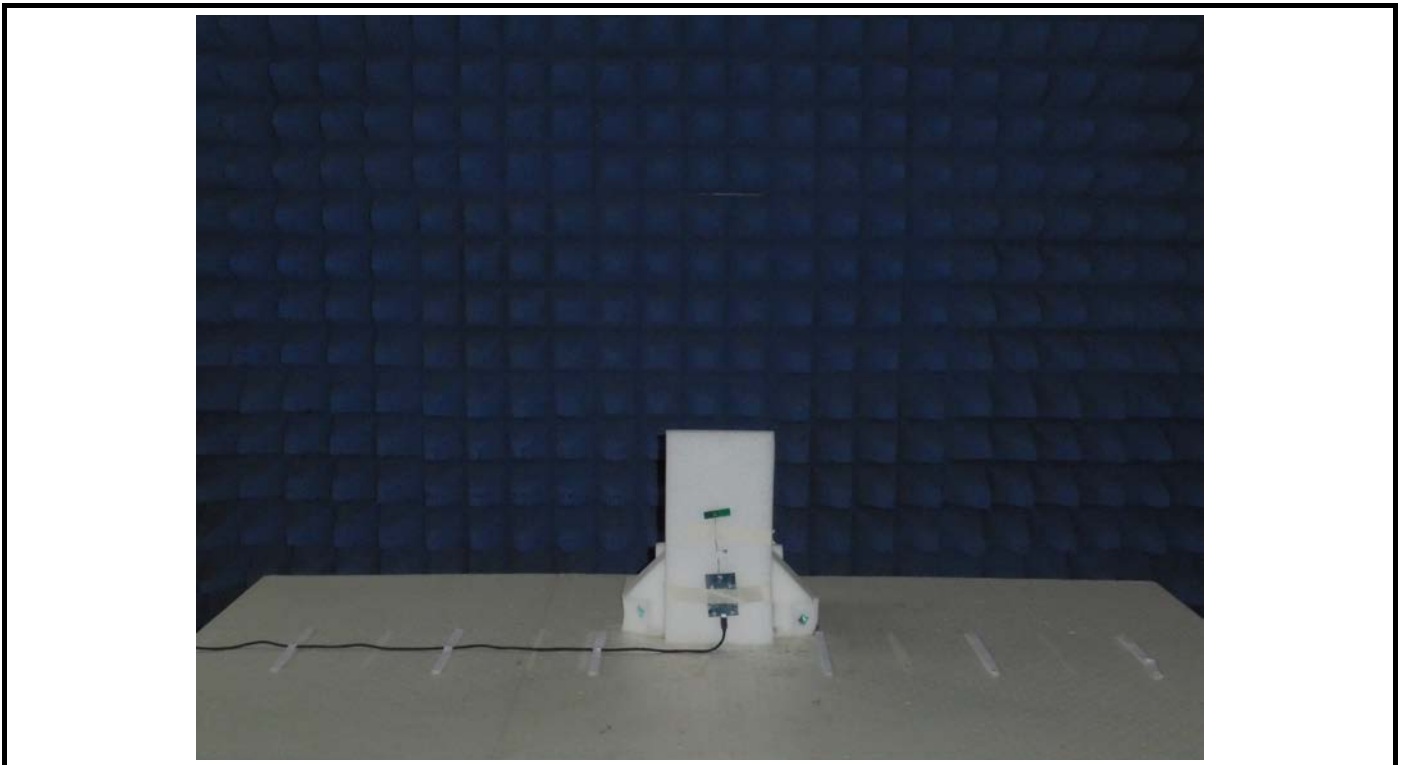


RS Test (Antenna: FlexPIFA)

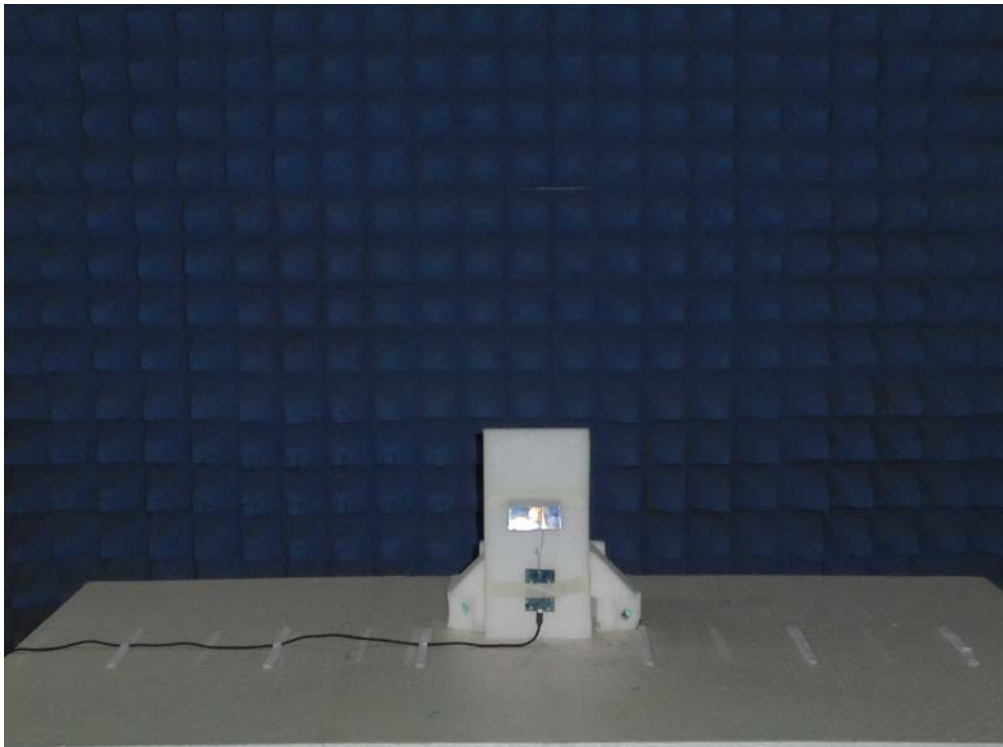

RS Test (Antenna: EDA-8709-2G4C1-B27-CY)

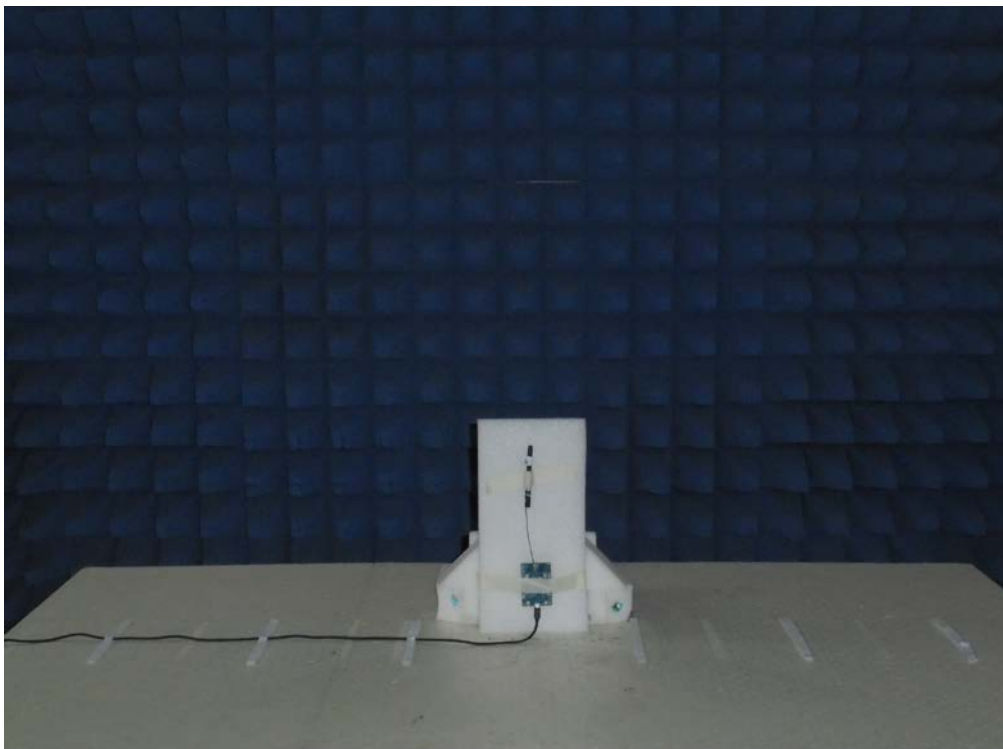

RS Test (Antenna: mFlexPIFA)

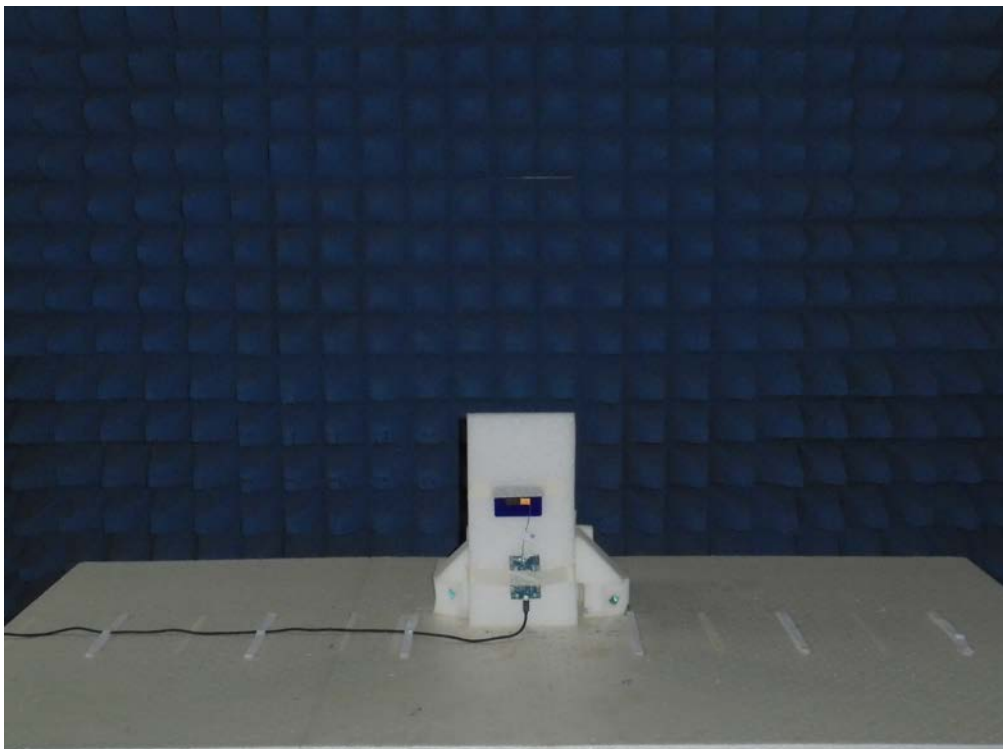

RS Test (Antenna: AD1608)

