

ISED Test Report

Equipment : Lyra 24P Series - Bluetooth 5.3 PCB module
(Please refer to section 1.1.1 for more details)

Model No. : Lyra 24P

Brand Name : Laird Connectivity

Applicant : Laird Connectivity LLC

Address : W66N220 Commerce Court, Cedarburg, WI
53012 United States Of America


Standard : ICES-003 Issue 7, Class B

Received Date : Dec. 30, 2022

Tested Date : Feb. 07 ~ Feb. 09, 2023


We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Peter Lin / Supervisor

Approved by:



Kent Chen / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Test Equipment and Calibration Data	6
1.3	Testing Applied Standards	7
1.4	Deviation from Test Standard and Measurement Procedure.....	7
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION.....	8
2.1	Testing Facility	8
2.2	The Worst Case Measurement Configuration.....	8
2.3	Local Support Equipment List	9
2.4	Test Setup Chart	9
2.5	Test Software and Operating Condition	9
3	EMISSION TESTS RESULTS	10
3.1	Conducted Emissions.....	10
3.2	Radiated Emissions.....	14
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	21
5	TEST LABORATORY INFORMATION	24

Release Record

Report No.	Version	Description	Issued Date
CI2D3001	Rev. 01	Initial issue	Jul. 05, 2023

Summary of Test Results

ICES-003 Emission Tests				
Ref. Std. Clause	Test Standard	Test Items	Measured	Result
3.2.1	ICES-003 Issue 7, Class B	Conducted Emissions	Under limit 6.02dB @ 4.123MHz.	Pass
3.2.2	ICES-003 Issue 7, Class B	Radiated Emissions	Under limit 9.43dB @ 800.18MHz.	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Laird part number
Laird Connectivity	Lyra 24P	Lyra 24P Series - Bluetooth v5.3 PCB Module (20dBm) with integrated antenna	453-00145
Laird Connectivity	Lyra 24P	Lyra 24P Series - Bluetooth v5.3 PCB Module (20dBm) with RF Trace Pad	453-00148
Laird Connectivity	Lyra 24P	Lyra 24P Series - Bluetooth v5.3 PCB Module (10dBm) with integrated antenna	453-00142

1.1.2 Feature of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
Highest Frequency of the Internal Sources	2.480GHz

1.1.3 Accessories

N/A

1.2 Test Equipment and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test Date	Feb. 08, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 16, 2022	Feb. 15, 2023
LISN	R&S	ENV216	101579	Apr. 21, 2022	Apr. 20, 2023
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 17, 2022	Oct. 16, 2023
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission below 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test Date	Feb. 07, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	Agilent	N9038A	MY53290044	Sep. 12, 2022	Sep. 11, 2023
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-562	May 19, 2022	May 18, 2023
Preamplifier	EMC	EMC02325	980194	Sep. 15, 2022	Sep. 14, 2023
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160501	Oct. 05, 2022	Oct. 04, 2023
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Oct. 05, 2022	Oct. 04, 2023
LF cable 10M	EMC	CFD400-E	CFD400-001	Oct. 05, 2022	Oct. 04, 2023
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test Date	Feb. 09, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 21, 2022	Nov. 20, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Sep. 16, 2022	Sep. 15, 2023
Preamplifier	EMC	83017A	MY39501309	Sep. 05, 2022	Sep. 04, 2023
RF Cable	EMC	EMC105-SM-SM-8000	180512	Oct. 05, 2022	Oct. 04, 2023
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Oct. 05, 2022	Oct. 04, 2023
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ICES-003 Issue 7, Class B

ANSI C63.4-2014 amended as per ANSI C63.4a-2017

1.4 Deviation from Test Standard and Measurement Procedure

None

1.5 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty		
Test Item	Frequency	Uncertainty
Conducted Emissions	150kHz ~ 30MHz	± 2.92 dB
Radiated Emissions	30MHz ~ 1GHz	± 4.32 dB
	Above 1GHz	± 4.9 dB

Note: The results of measurements of emissions shall reference the measurement uncertainty considerations contained in CISPR 16-4-2.

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH02-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

2.2 The Worst Case Measurement Configuration


Radiation Pretest Mode	
Pretest Mode	Operating Description
1	EUT: Lyra 24P Integrated antenna power=10dBm, X-axis, BT link, with notebook 120V/60Hz
2	EUT: Lyra 24P Integrated antenna power=20dBm, X-axis, BT link, with notebook 120V/60Hz
3	EUT: Lyra 24P RF trace pin power=20dBm, X-axis, Ant.: NanoBlue, BT link, with notebook 120V/60Hz
4	EUT: Lyra 24P RF trace pin power=20dBm, X-axis, Ant.: FlexPIFA, BT link, with notebook 120V/60Hz
5	EUT: Lyra 24P RF trace pin power=20dBm, X-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, with notebook 120V/60Hz
6	EUT: Lyra 24P RF trace pin power=20dBm, X-axis, Ant.: mFlexPIFA, BT link, with notebook 120V/60Hz
7	EUT: Lyra 24P RF trace pin power=20dBm, X-axis, Ant.: iFlexPIFA, BT link, with notebook 120V/60Hz
For Pretest Mode 5 is the worst case and only its data was record in this test report.	

The Determined Worst Case Configurations	
Conducted Emissions	
Test Mode	Operating Description
1	EUT: Lyra 24P RF trace pin power=20dBm, X-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, with notebook 120V/60Hz
Radiated Emissions	
Test Mode ≤1GHz	Operating Description
1	EUT: Lyra 24P RF trace pin power=20dBm, X-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, with notebook 120V/60Hz
Test Mode >1GHz	Operating Description
1	EUT: Lyra 24P RF trace pin power=20dBm, X-axis, Ant.: EDA-8709-2G4C1-B27-CY, BT link, with notebook 120V/60Hz

2.3 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	S/N	Remarks
1	Wireless connectivity tester	R&S	CMW270	100856	---
2	Fixture board	---	---	---	Provided by applicant.

2.4 Test Setup Chart

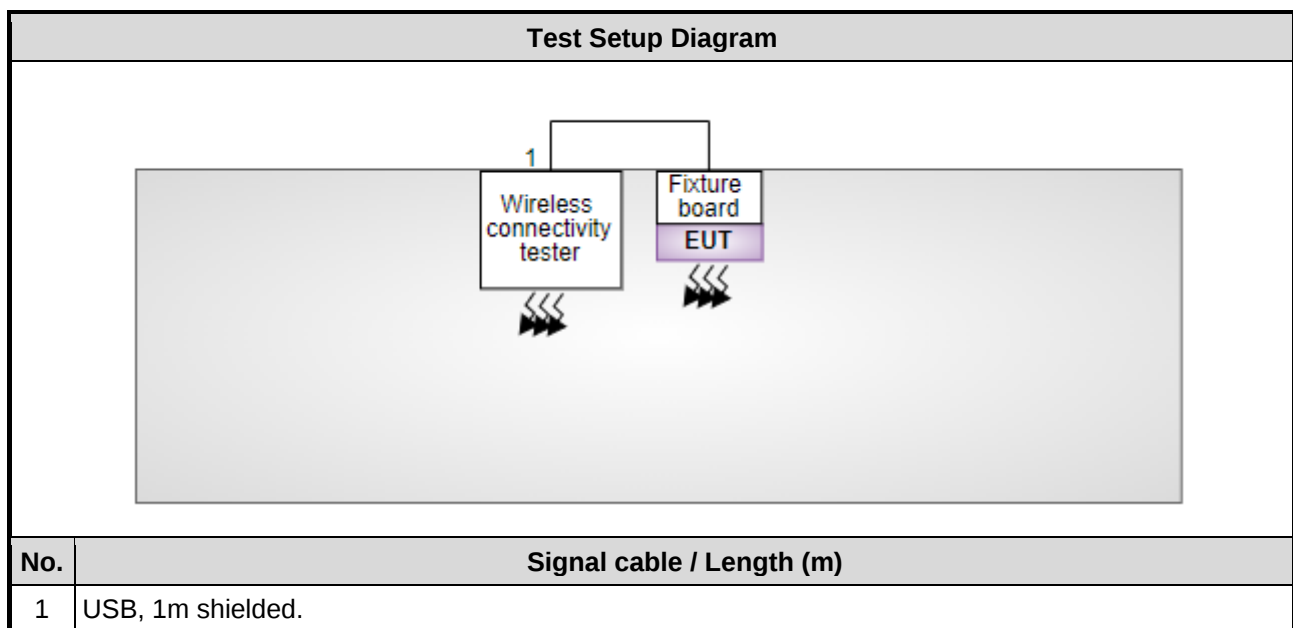

2.5 Test Software and Operating Condition

- The BT radio function is linked between EUT and the Wireless connectivity tester

3 Emission Tests Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Frequency Range (MHz)	Class A Quasi-Peak (dBuV)	Class A Average (dBuV)	Class B Quasi-Peak (dBuV)	Class B Average (dBuV)
0.15 – 0.5	79	66	66 to 56 ⁱ	56 to 46 ⁱ
0.5 – 5	73	60	56	46
5 – 30	73	60	60	50

Note: The more stringent limit applies at transition frequencies.
i. The limit level in dBuV decreases linearly with the logarithm of frequency.

3.1.2 Test Procedures


- The EUT was placed on a table with a height of 0.8 meters from the metal ground plane and 0.4 meters from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- The test equipment EUT installed received DC power through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All the support units were connected to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The measurement frequency range extends from 150 kHz to 30 MHz.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.


3.1.3 Test Setup

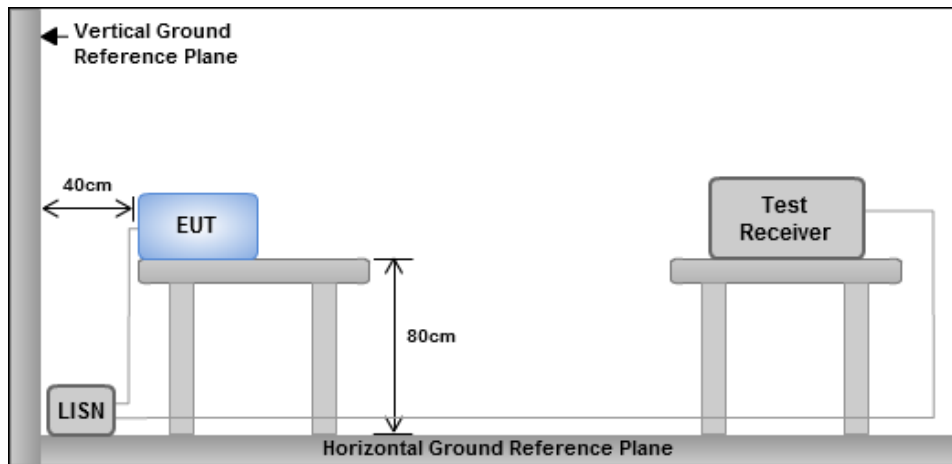

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

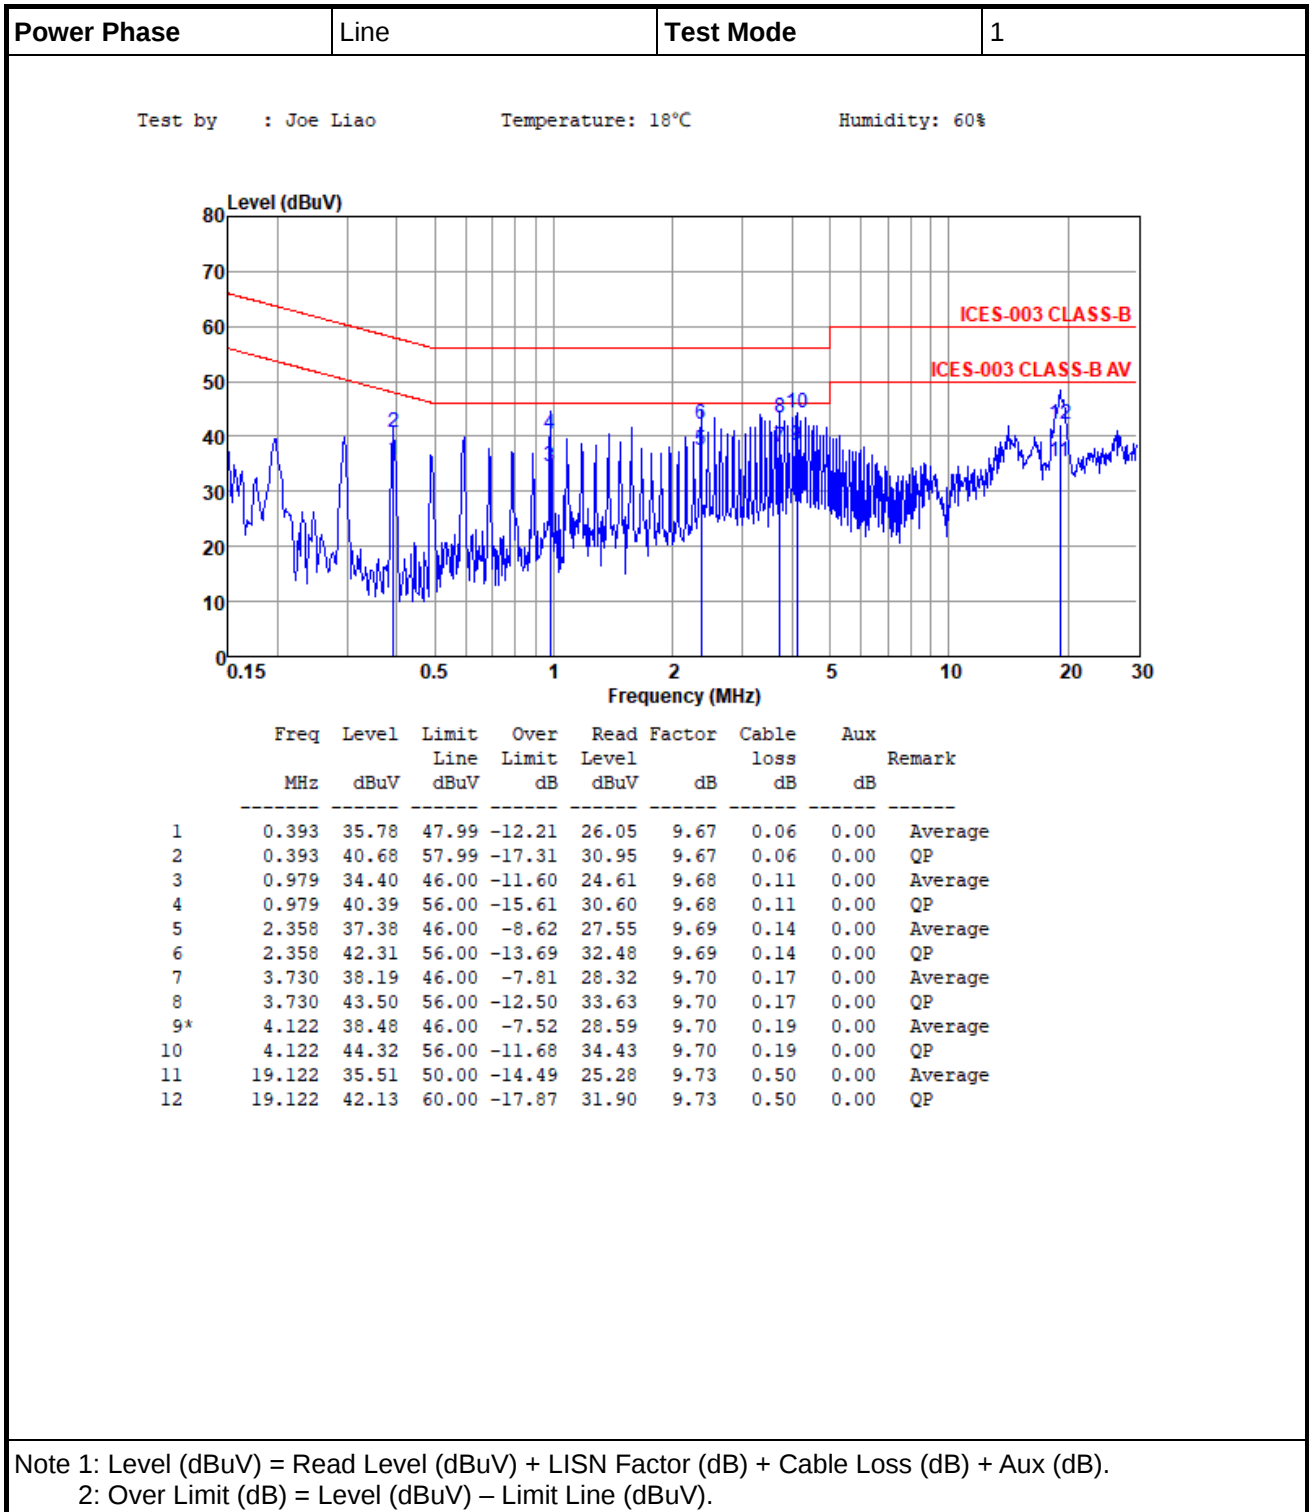

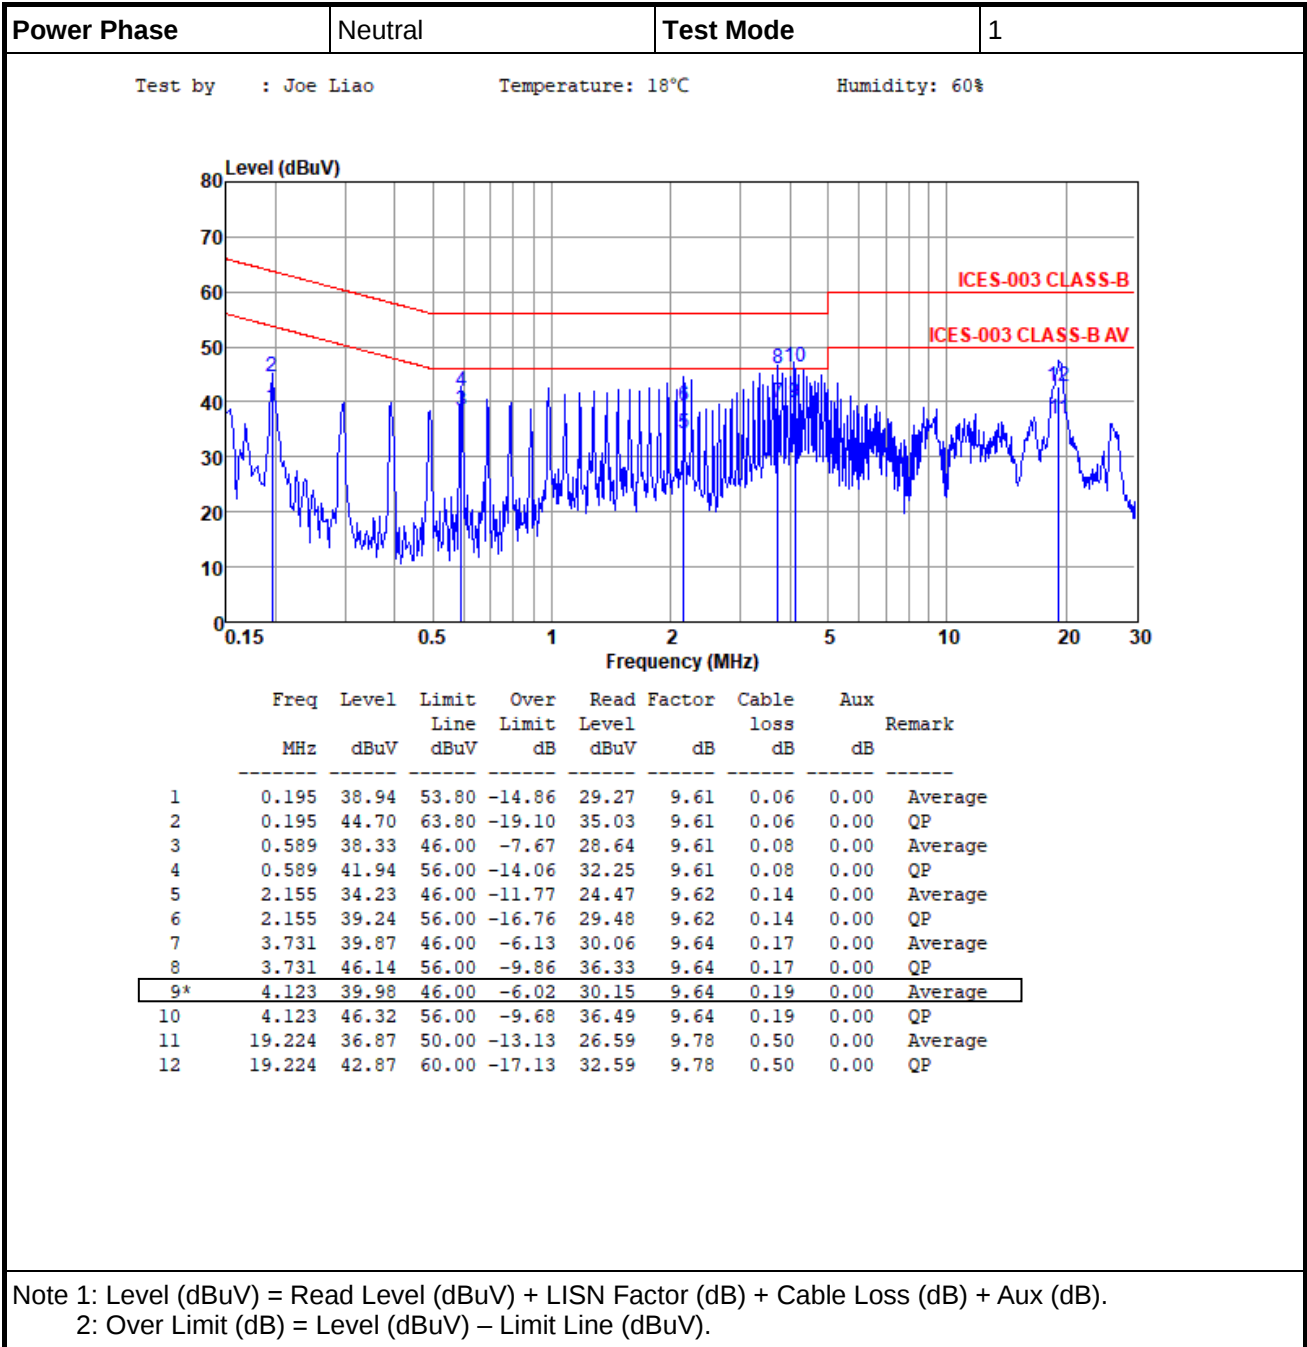

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions

Radiated emissions limits (30 MHz to 1 GHz) at 3 m distance

Frequency range (MHz)	Class A Quasi-peak (dBuV/m)	Class B Quasi-peak (dBuV/m)
30 – 88	50.0	40.0
88 – 216	54.0	43.5
216 – 230	56.9	46.0
230 – 960	57.0	47.0
960 – 1000	60.0	54.0

Note: The more stringent limit applies at transition frequencies.

Required emission limits at 3 m distance (at and above 1 GHz)

Frequency range (GHz) ⁱ	Class A Average dB(μV/m)	Class A Peak dB(μV/m)	Class B Average dB(μV/m)	Class B Peak dB(μV/m)
1 – F _M	60	80	54	74

i. The highest measurement frequency, F_M in GHz, shall be determined as per table above.

Required highest measurement frequency for radiated emissions:

Highest internal frequency (F _x) ⁱ	Highest measurement frequency (F _M)
F _x ≤ 108 MHz	1 GHz
108 MHz < F _x ≤ 500 MHz	2 GHz
500 MHz < F _x ≤ 1 GHz	5 GHz
F _x > 1 GHz	5 x F _x up to maximum of 40GHz

i. F_x is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

3.2.2 Test Procedures

Measuring below 1 GHz:


- a. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- b. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- c. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Measuring above 1 GHz:


- a. Same test set up as below 1GHz radiated testing.
- b. The EUT was set 3 meters from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- c. There should be absorber placed between the EUT and Antenna and its located size should let the test site meet CISPR16-1-4 requirement.
- d. The table was rotated 360 degrees to determine the position of the highest radiation.
- e. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- f. Set the Horn Antenna at 1m height, then run the turn table to get the maximum noise reading from Horizontal and Vertical polarity separately.
- g. When EUT locating on the turn-table, the Horn Antenna must be raised up and descended down, then turning around the turn-table to get the maximum noise reading of the Horizontal and Vertical polarity separately. Note the maximum raise up height is same as the top of EUT.
- h. If emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.3 Test Setup

Radiated Emissions below 1 GHz

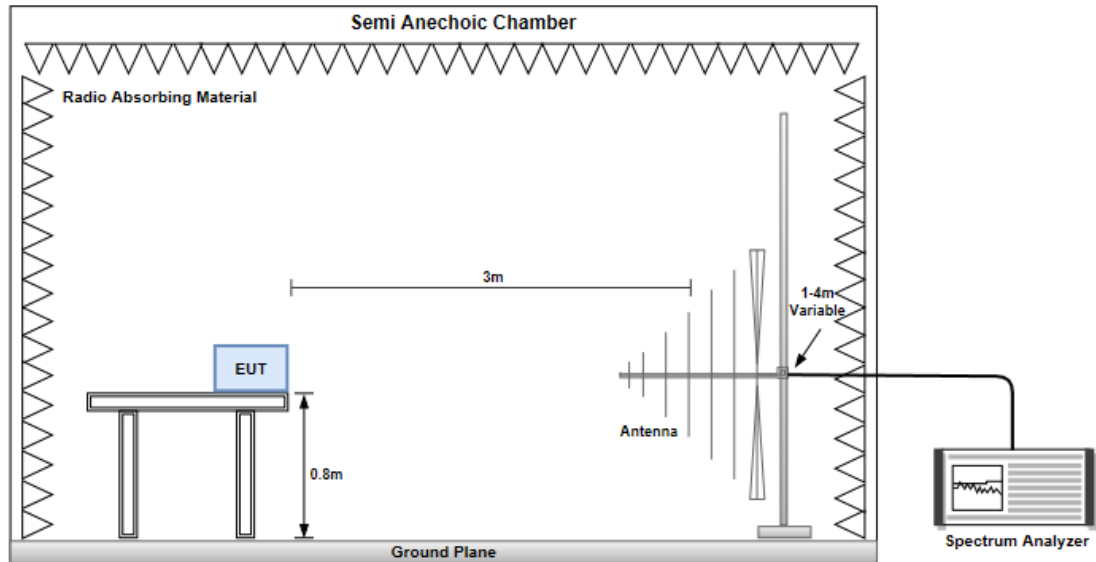

Radiated Emissions above 1 GHz

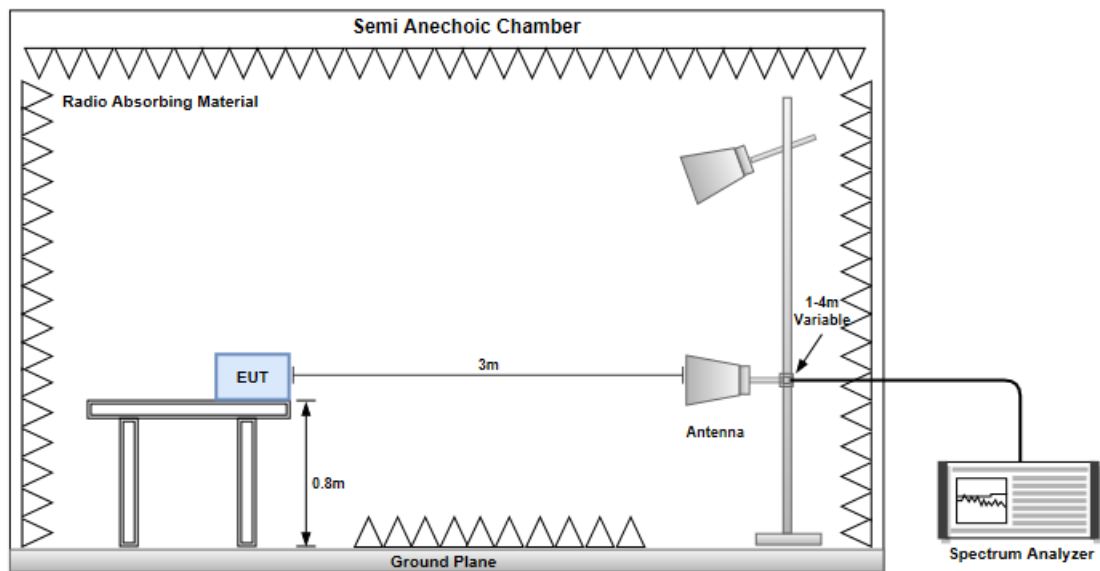

3.2.4 Radiated Emissions (Below 1GHz)

Polarization	Horizontal	Test Mode	1
Test By :Jim Hong Temperature(°C):19 Humidity(%):65			
Level (dBUV/m) <			

Polarization	Vertical	Test Mode	1
Test By :Jim Hong Temperature(°C):19 Humidity(%):65			
Level (dBuV/m) </			


3.2.5 Radiated Emissions (Above 1GHz)

Polarization	Horizontal	Test Mode	1
Test By :Jim Hong Temperature(°C):17 Humidity(%):62			
Level (dBuV/m) <			



Polarization	Vertical	Test Mode	1
Test By :Jim Hong Temperature(°C):17 Humidity(%):62			
Level (dBuV/m)			

4 Photographs of the Test Configuration



Conducted Emission Test

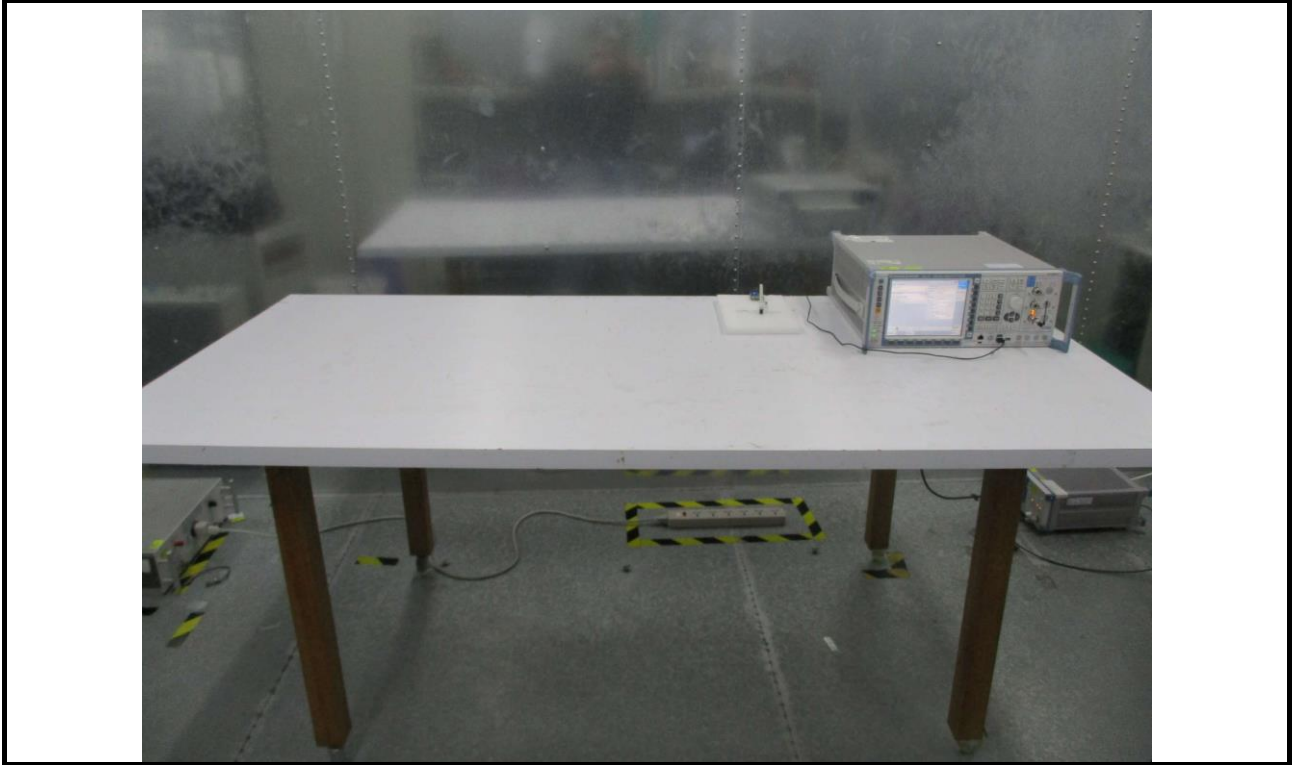

Radiated Emission Below 1GHz Test

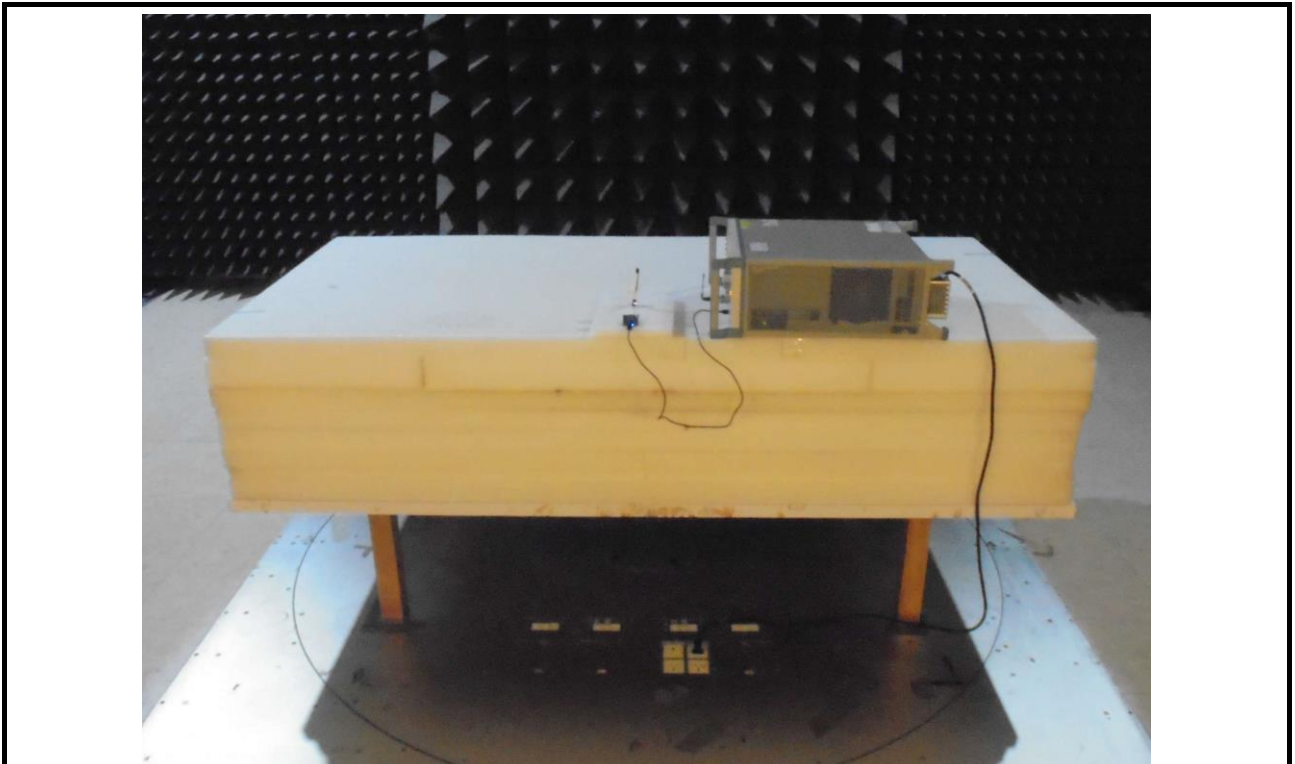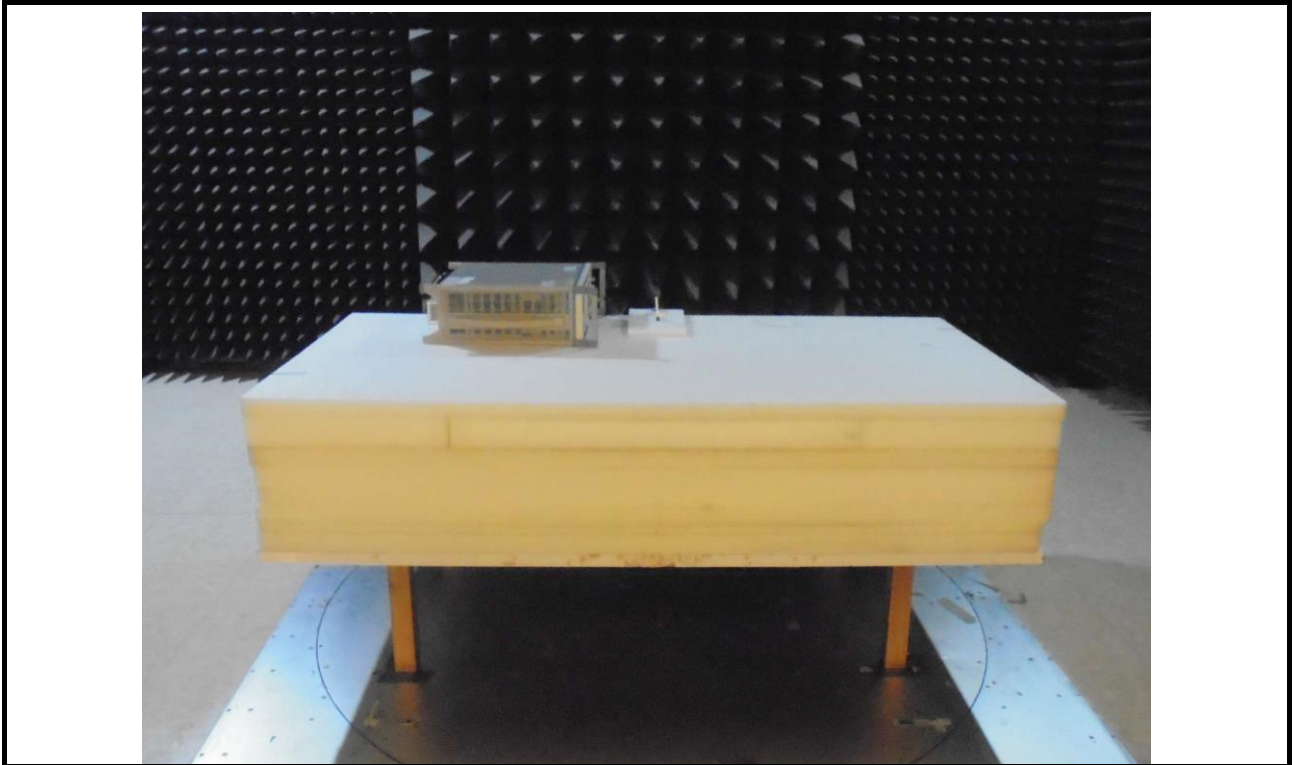

Radiated Emission Above 1GHz Test

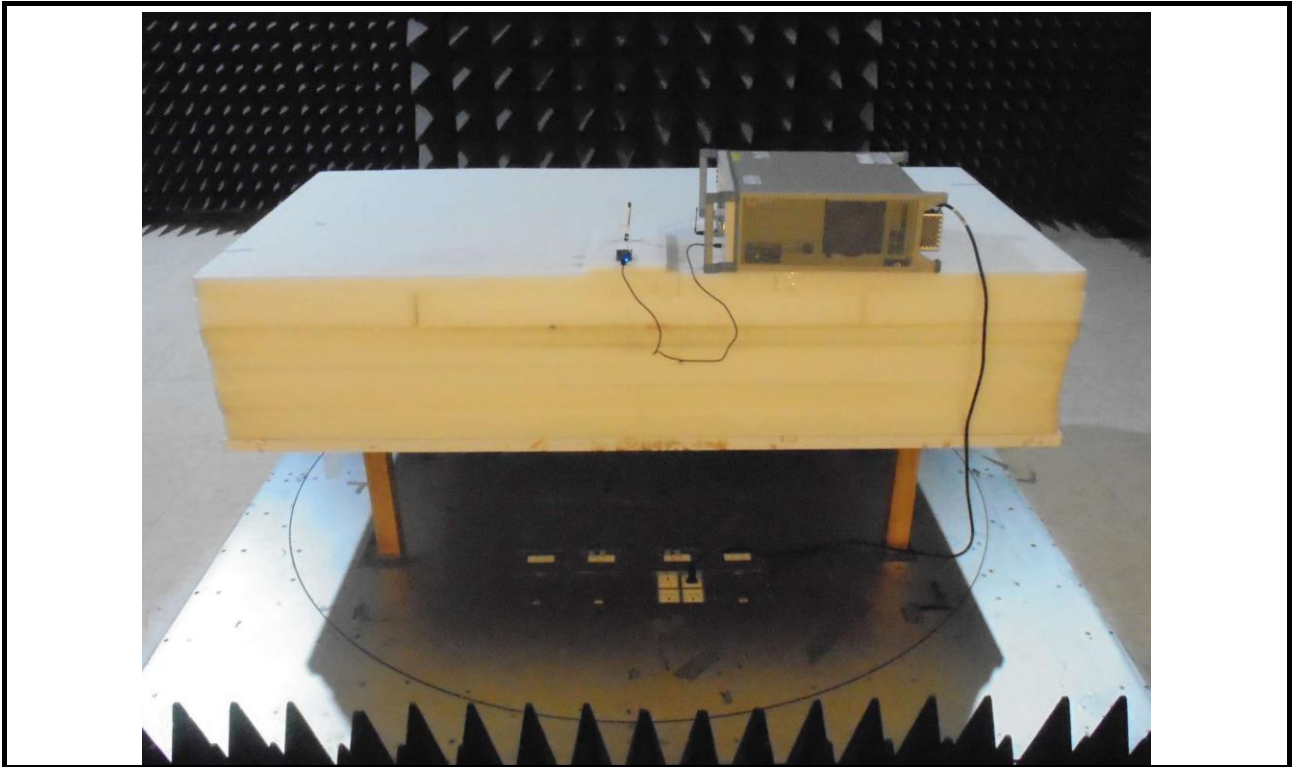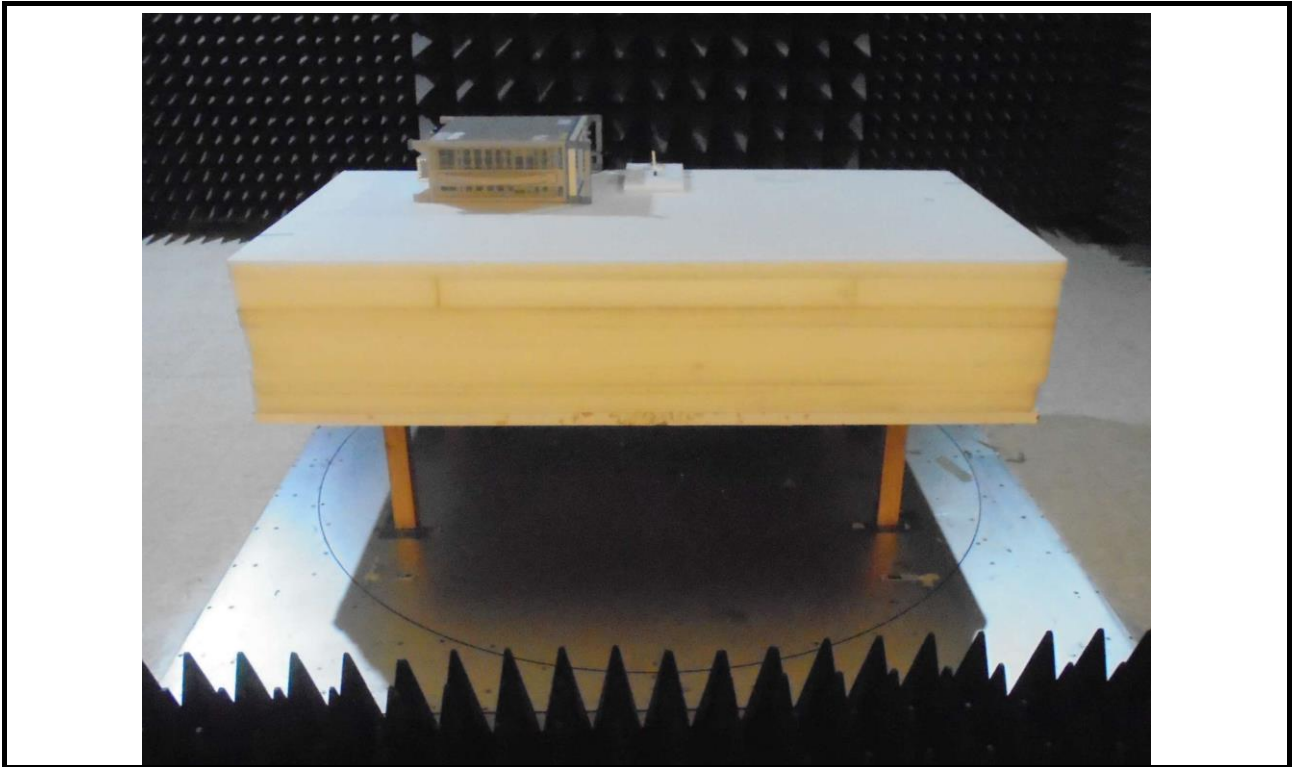

5 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==