


FCC Test Report

FCC ID : SQG-VEDAIF912
Equipment : 802.11ax Wi-Fi 6 + BT5.4 Module
Model No. : Veda IF912
Brand Name : Ezurio
Applicant : Ezurio LLC
Address : W66N220 Commerce Court, Cedarburg, WI
53012 United States Of America
Standard : 47 CFR FCC Part 15.247
Received Date : Jan. 12, 2026
Tested Date : Mar. 05 ~ Mar. 26, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	9
1.4	The Equipment List	10
1.5	Test Standards	11
1.6	Reference Guidance	11
1.7	Deviation from Test Standard and Measurement Procedure.....	11
1.8	Measurement Uncertainty	11
2	TEST CONFIGURATION.....	12
2.1	Testing Facility	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS	13
3.1	6dB and Occupied Bandwidth.....	13
3.2	Conducted Output Power	14
3.3	Power Spectral Density	15
3.4	Unwanted Emissions into Restricted Frequency Bands	16
3.5	Emissions in Non-Restricted Frequency Bands.....	18
3.6	AC Power Line Conducted Emissions	19
4	TEST LABORATORY INFORMATION	20
Appendix A. 6dB and Occupied Bandwidth		
Appendix B. Conducted Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions into Restricted Frequency Bands		
Appendix E. Emissions in Non-Restricted Frequency Bands		
Appendix F. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR611203AC	Rev. 01	Initial issue	Jun. 15, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emission	[dBuV]: 0.436MHz 39.07 (Margin -8.07dB) - AV	Pass
15.247(d) 15.209	Unwanted Emissions	[dBm]: 4824MHz -42.32 (Margin -1.12dB) - AV	Pass
15.247(b)(3)	Conducted Output Power	Max Power [dBm]: 24.45	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

Model Name	Part No.	Product Name	Description
Veda IF912	453-00396	802.11ax Wi-Fi 6 + BT5.4 Module	Module, Veda IF912, SIP, Tri Band, No Embedded Memory, RF Trace Pin
	453-00397		Module, Veda IF912, SIP, Tri Band, Embedded Ext. Memory, 8M PSRAM, 8M Flash, RF Trace Pin

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7
2400-2483.5	ax (HE20)	2412-2462	1-11 [11]	1	MCS 0-11
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: DSSS-DBPSK, DQPSK, CCK modulation OFDM/OFDMA- BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM modulation. Note 3: 802.11ax supports full RU and partial RU configuration. Test results of full RU configuration are recorded in this report. Refers to report no.: FR611203-1AC for test results of partial RU configuration.					

1.1.3 Antenna Details

Integrated Antenna

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
Yageo / Chip Antenna	ANT1608LL 14R2460A	Chip	NA	2.3	0.1	0.1	1.8	2.5

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				5925~6425	6425~6525	6525~6875	6875~7125
Yageo / Chip Antenna	ANT1608LL 14R2460A	Chip	NA	2.7	3.3	2.8	3.4

External Antenna

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
Ezurio / FlexMIMO 6E	EFD2471A3 S-10MH4L	PIFA	MHF4L	2.2	3.8	3.8	3.8	3.8
Ezurio / FlexPIFA 6E	EFB2471A3 S-10MH4L	PIFA	MHF4L	2.2	3.9	3.9	3.9	3.9
Ezurio / Mini NanoBlade Flex 6GHz	EMF2471A3 S-10MH4L	PCB Dipole	MHF4L	2.4	4.4	4.4	4.4	4.4
Joymax Electronics / Dipole 6E	TWX-100BR S3B	Dipole	RP-SMA	2	4	4	4	4
Ezurio / FlexPIFA Dual Band	001-0021	PIFA	IPEX MHF4L	2.5	3	3	3	3
Ezurio / FlexPIFA Dual Band	EFB2455A3 S-15MH4L	PIFA	MHF1	2.5	3	3	3	3

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				5925~6425	6425~6525	6525~6875	6875~7125
Ezurio / FlexMIMO 6E	EFD2471A3 S-10MH4L	PIFA	MHF4L	3.3	3.3	3.3	3.3
Ezurio / FlexPIFA 6E	EFB2471A3 S-10MH4L	PIFA	MHF4L	3.8	3.8	3.8	3.8
Ezurio / Mini NanoBlade Flex 6GHz	EMF2471A3 S-10MH4L	PCB Dipole	MHF4L	5.2	5.2	5.2	5.2
Joymax Electronics / Dipole 6E	TWX-100BR S3B	Dipole	RP-SMA	4	4	4	4

1.1.4 Configuration of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host	
RU Configuration	☒ Full RU	☒ Partial RU

1.1.5 Channel List

Channel	Frequency(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

1.1.6 Test Tool and Duty Cycle

Test Tool	GNOME Terminal, Version: 3.52.0		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11b	99.85%	0.01
	11g	98.70%	0.06
	ax HE20-OFDMA	96.57%	0.15


1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)	Power Index
11b	2412	72
11b	2437	72
11b	2462	72
11g	2412	66
11g	2417	68
11g	2422	70
11g	2427	74
11g	2437	76
11g	2447	74
11g	2452	72
11g	2457	68
11g	2462	64
ax HE20-OFDMA	2412	50
ax HE20-OFDMA	2417	58
ax HE20-OFDMA	2422	64
ax HE20-OFDMA	2427	70
ax HE20-OFDMA	2437	72
ax HE20-OFDMA	2447	72
ax HE20-OFDMA	2452	68
ax HE20-OFDMA	2457	62
ax HE20-OFDMA	2462	48

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	Lenovo	ThinkPad X230	DoC	---
2	Fixture	---	---	---	Provided by applicant.
3	50 ohm load	woken	WTER-18S2	---	---

1.3 Test Setup Chart

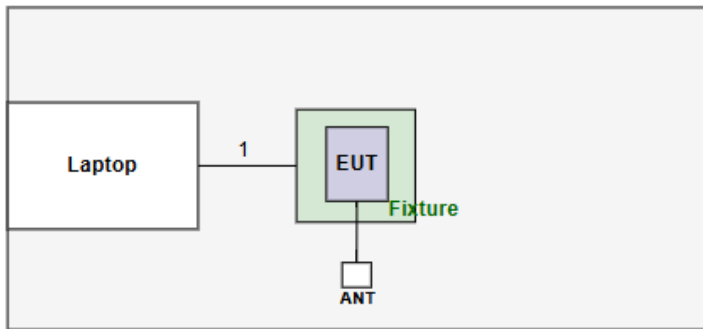Test Setup Diagram (Conducted Emission)	
	
No.	Signal cable / Length (m)
1	USB, 1m shielded.

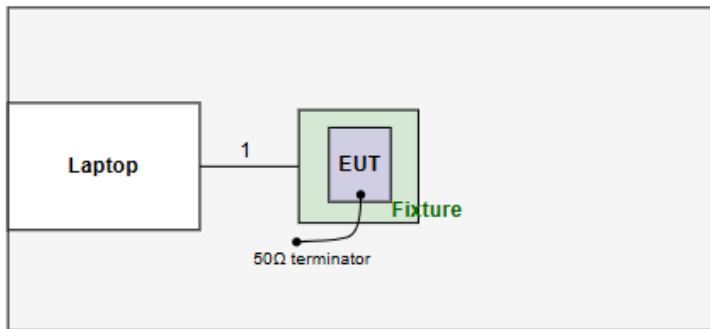Test Setup Diagram (Radiated Emission)	
	
No.	Signal cable / Length (m)
1	USB, 1m shielded.

1.4 The Equipment List

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Mar. 11 ~ Mar. 13, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101516	Jun. 09, 2025	Jun. 08, 2026
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2025	Nov. 20, 2026
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2025	Nov. 20, 2026
Attenuator	Pasternack	PE7005-10	10-2	Oct. 03, 2025	Oct. 02, 2026
Measurement Software	Sporton	SENSE-15247_DTS	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Mar. 05 ~ Mar. 13, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 26, 2026	Feb. 25, 2027
Spectrum Analyzer	R&S	FSV40	101499	Mar. 27, 2025	Mar. 26, 2026
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2025	Jul. 03, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 23, 2026	Jan. 22, 2027
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC02325	980187	Jun. 24, 2025	Jun. 23, 2026
Preamplifier	EMC	EMC118A45SE	980897	Aug. 08, 2025	Aug. 07, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 19, 2025	Sep. 18, 2026
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 19, 2025	Sep. 18, 2026
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 19, 2025	Sep. 18, 2026
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 19, 2025	Sep. 18, 2026
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 19, 2025	Sep. 18, 2026
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Pasternack	PE7005-10	10-3	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER	WI	WHK3.1-18G-10SS	43	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Mar. 26, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101659	Apr. 17, 2025	Apr. 16, 2026
LISN	R&S	ENV216	101579	May 07, 2025	May 06, 2026
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Jan. 13, 2026	Jan. 12, 2027
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Oct. 07, 2025	Oct. 06, 2026
50 ohm terminal	NA	50	01	Jun. 17, 2025	Jun. 16, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2020

ANSI C63.4-2014 + C63.4a-2017

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.96 dB
Unwanted Emission > 1 GHz	± 4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test method	Mode	Note
AC Power Line Conducted Emission	11g	2437	6Mbps	Conducted	TX	---
Unwanted Emissions ≤ 1GHz	11g	2437	6Mbps	Radiated	TX	Note 2
Unwanted Emissions >1GHz	11b 11g ax HE20-OFDMA	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462	1 Mbps 6 Mbps MCS 0	Radiated	TX	Note 2
Unwanted Emissions ≤ 1GHz	ax HE20-OFDMA	2437	MCS0	Conducted	TX	---
Conducted Output Power	11b	2412 / 2437 / 2462	1 Mbps	Conducted	TX	---
	11g	2412 / 2417 / 2422 / 2427 / 2437 / 2447 / 2452 / 2457 / 2462	6 Mbps			
	ax HE20-OFDMA	2412 / 2417 / 2422 / 2427 / 2437 / 2447 / 2452 / 2457 / 2462	MCS 0			
6dB bandwidth Power spectral density Unwanted Emissions >1GHz	11b 11g ax HE20-OFDMA	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462	1 Mbps 6 Mbps MCS 0	Conducted	TX	---
NOTE: - The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane result was found as the worst case and was shown in this report. - The 50Ω terminator is connected to antenna port of EUT for radiated emission measurement. - Two skus had been covered during the pretest and found that Part No. 453-00397 was the worst case and was selected for the final test. (sku 1: Part No. 453-00396, sku 2: Part No. 453-00397)						

3 Transmitter Test Results

3.1 6dB and Occupied Bandwidth

3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.1.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.1.3 Test Setup



3.1.4 Test Results

Ambient Condition	22-23°C / 63-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

Antenna gain $> 6\text{dBi}$

Non Fixed, point to point operations.

The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations

Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.2.3 Test Setup



3.2.4 Test Results

Ambient Condition	22-23°C / 63-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.3.2 Test Procedures

Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


Average PSD, duty cycle $\geq 98\%$

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

Average PSD, duty cycle $< 98\%$

1. Set the RBW = 3 kHz, VBW = 10 kHz
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.
6. Add $10 \log (1/x)$, where x is the duty cycle.

3.3.3 Test Setup



3.3.4 Test Results

Ambient Condition	22-23°C / 63-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix C.

3.4 Unwanted Emissions into Restricted Frequency Bands

3.4.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9~90 kHz, 110~490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

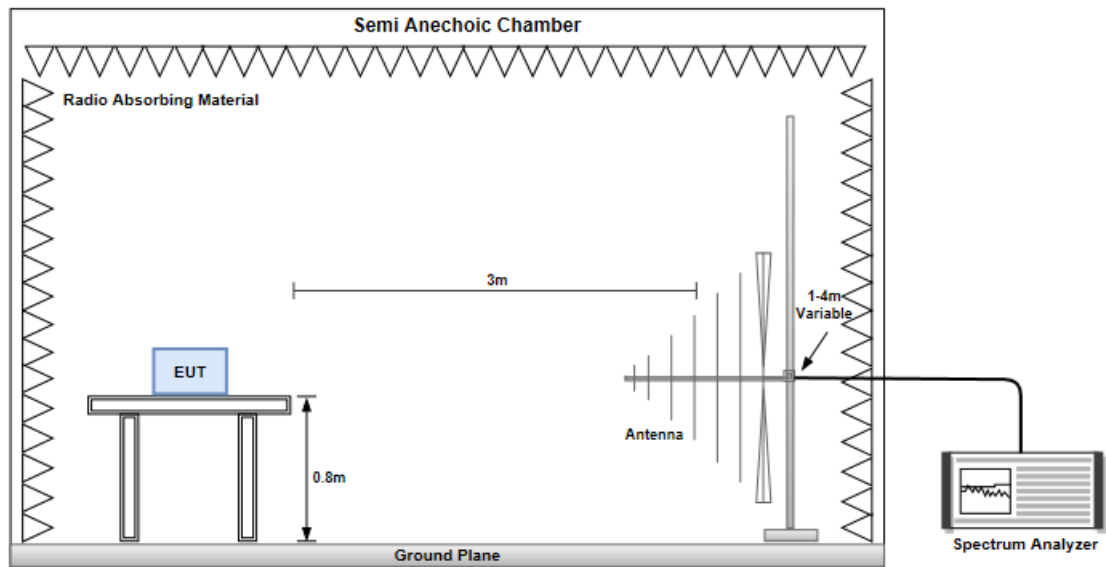

Radiated Emissions above 1 GHz

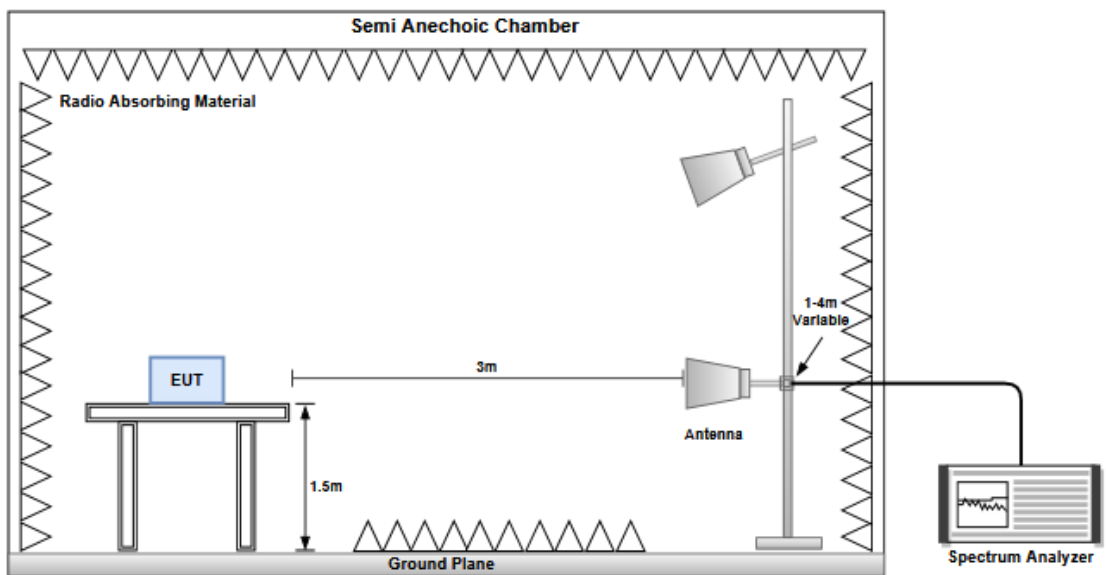

3.4.4 Test Results

Refer to Appendix D.

3.5 Emissions in Non-Restricted Frequency Bands

3.5.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.5.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	22-23°C / 63-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix E.

3.6 AC Power Line Conducted Emissions

3.6.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.6.3 Test Setup

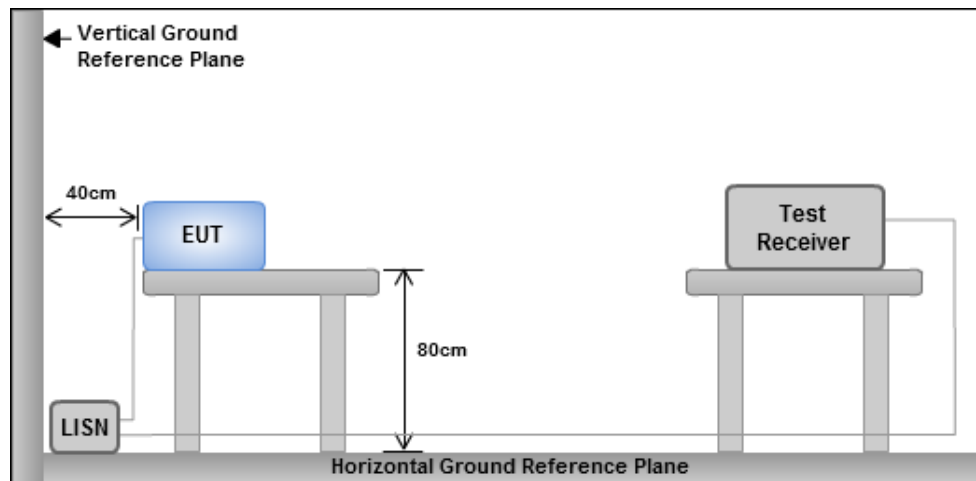

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.6.4 Test Results

Refer to Appendix F.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	8.05M	12.077M	12M1G1D	8.05M	11.975M
802.11g_Nss1,(6Mbps)_1TX	15.925M	16.671M	16M7D1D	15.825M	16.583M
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	18.825M	19.051M	19M1D1D	18.8M	18.904M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	8.05M	12.077M
2437MHz	Pass	500k	8.05M	12.04M
2462MHz	Pass	500k	8.05M	11.975M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	15.9M	16.603M
2437MHz	Pass	500k	15.825M	16.671M
2462MHz	Pass	500k	15.925M	16.583M
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	-	-	-	-
2412MHz	Pass	500k	18.8M	18.904M
2437MHz	Pass	500k	18.8M	19.051M
2462MHz	Pass	500k	18.825M	18.912M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW


2412MHz

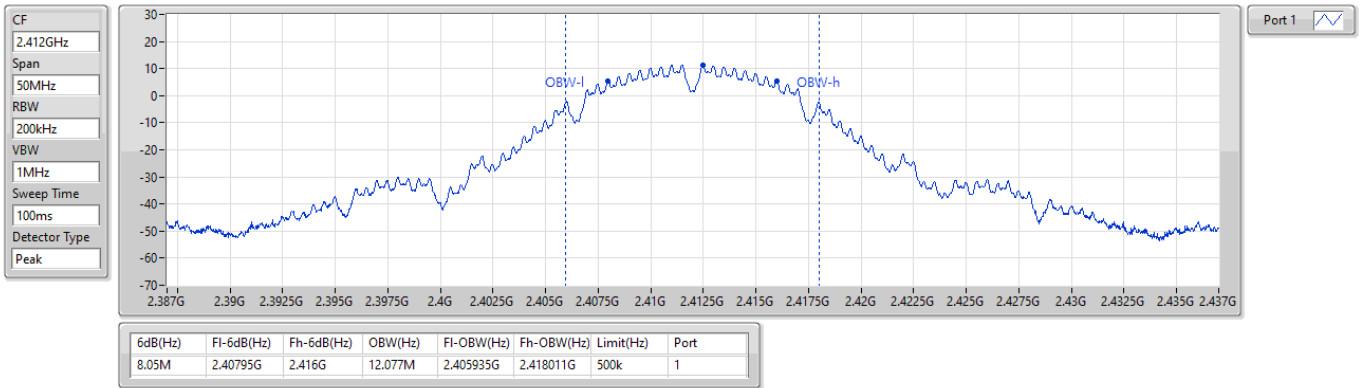

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW


2437MHz

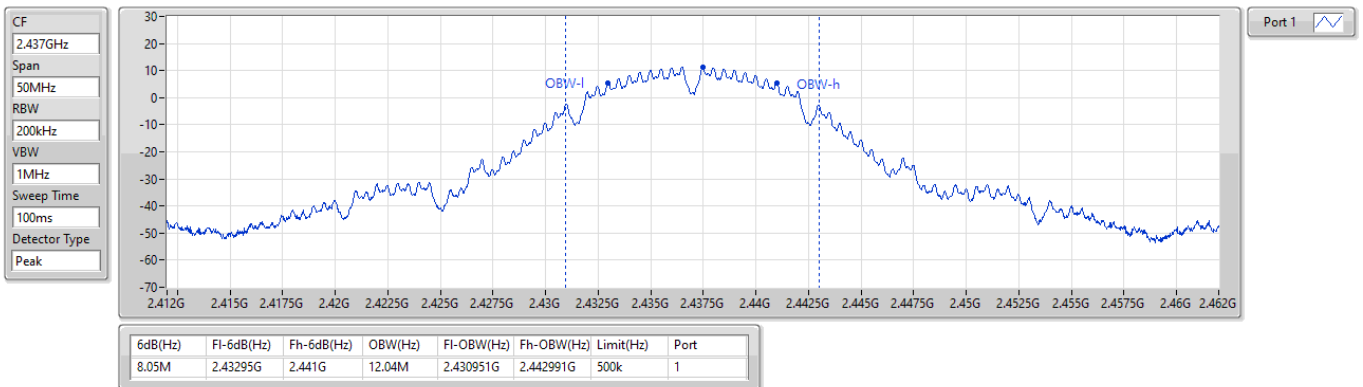

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW


2462MHz

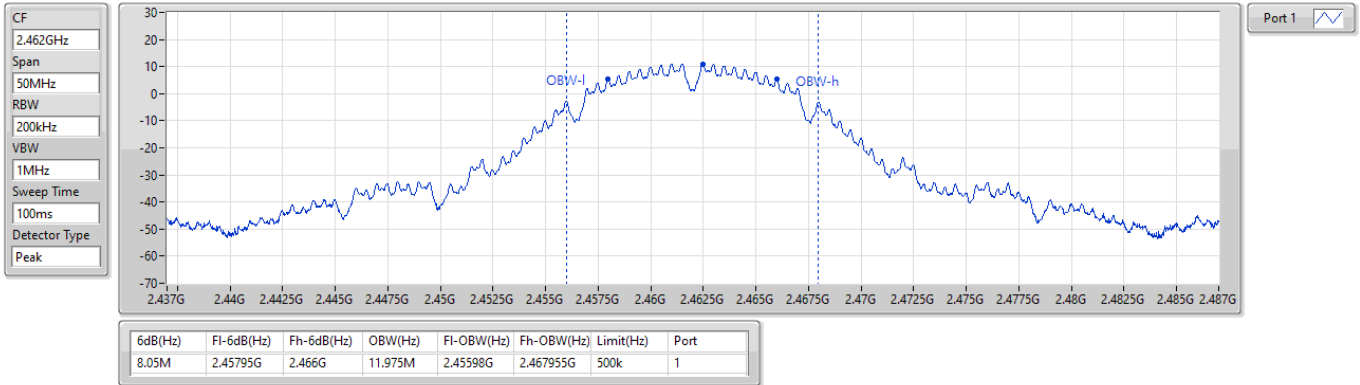

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW


2412MHz

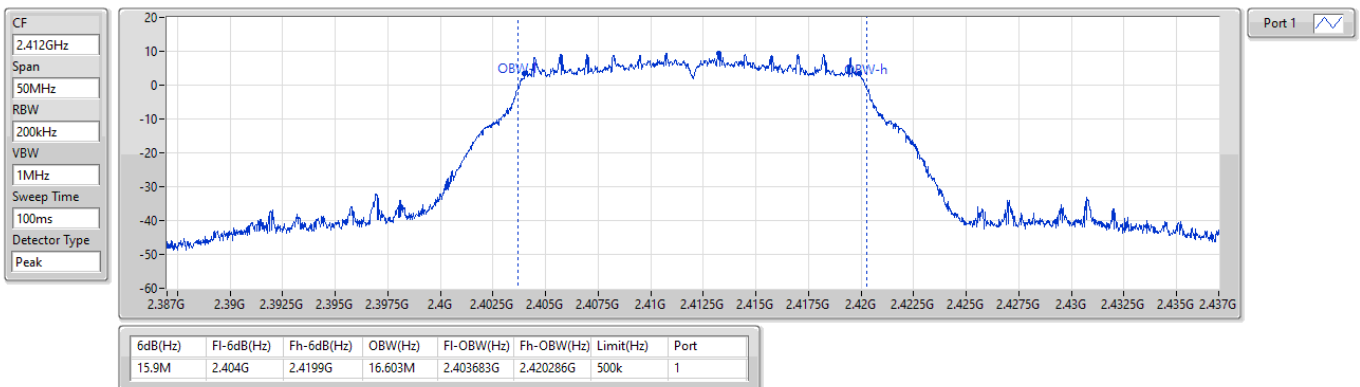

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW


2437MHz

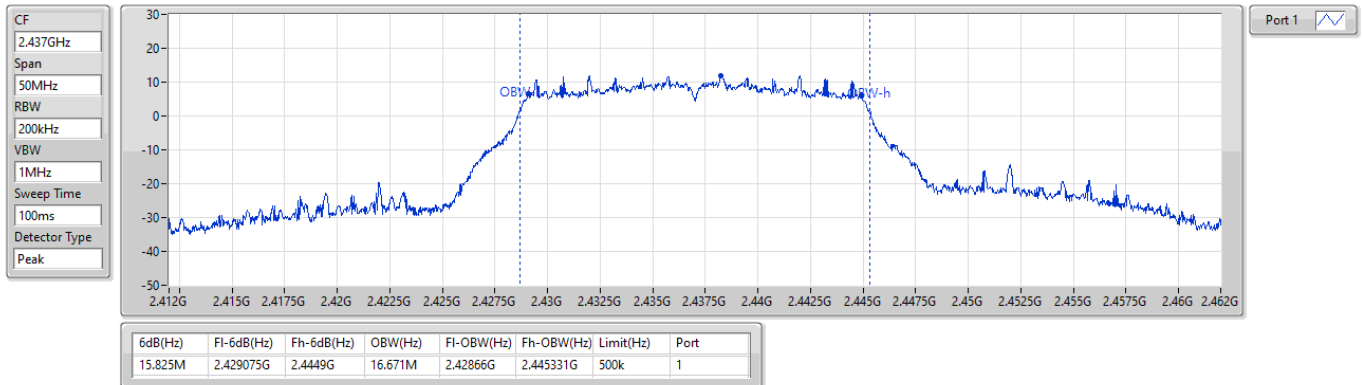

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW

2462MHz

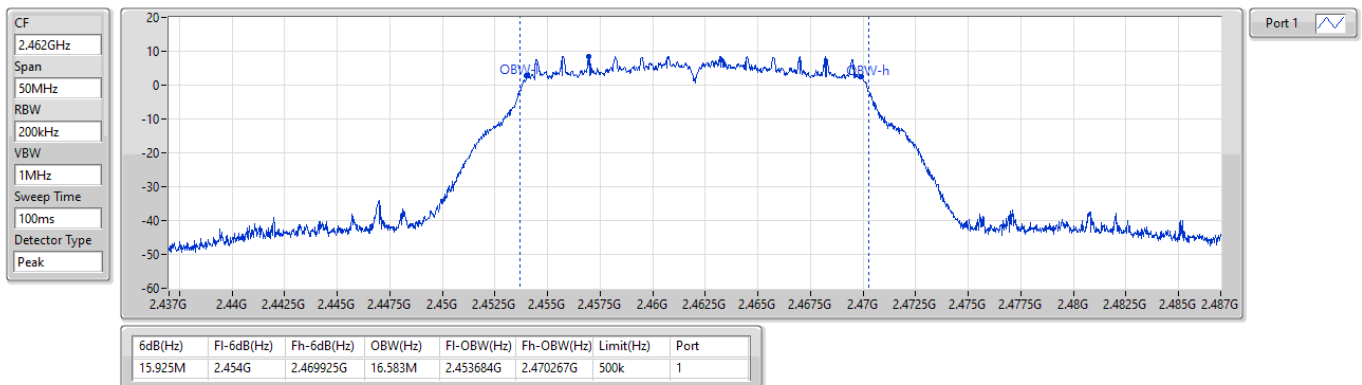




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW


2412MHz

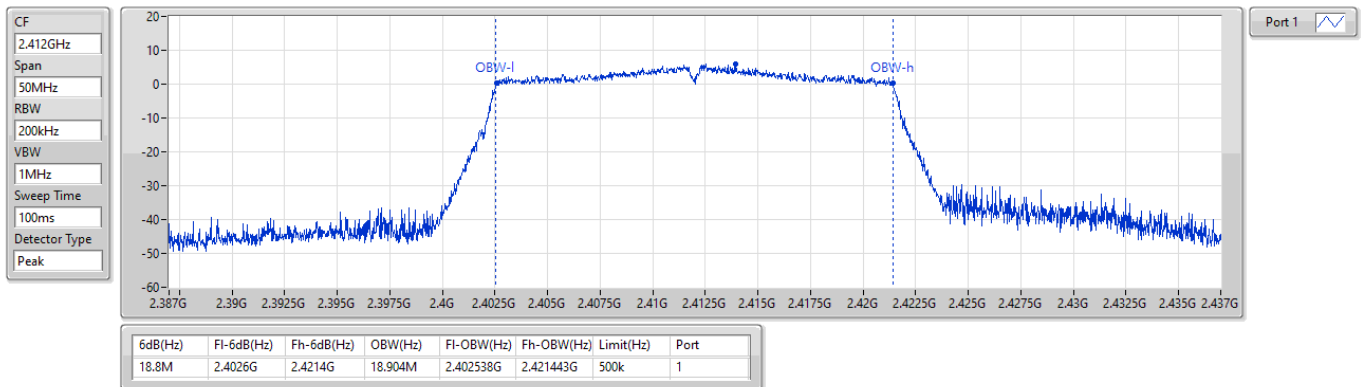

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

2437MHz

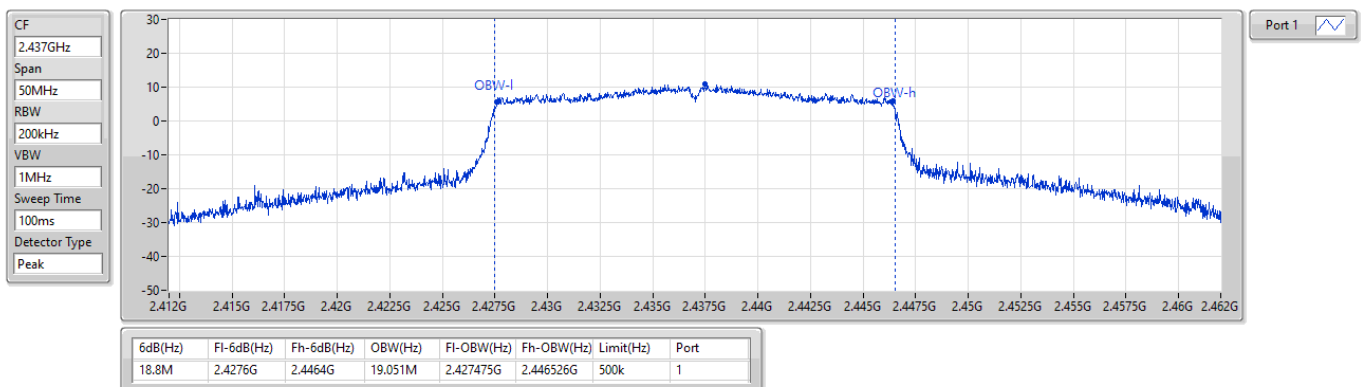




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

2462MHz

CF
2.462GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

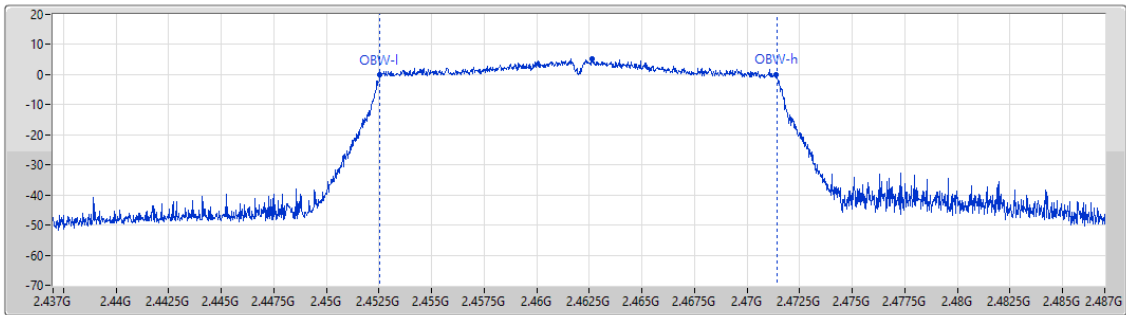

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.825M	2.45255G	2.471375G	18.912M	2.452521G	2.471433G	500k	1

**Conducted Output Power(Average)****Appendix B****Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	19.39	0.08690
802.11g_Nss1,(6Mbps)_1TX	20.03	0.10069
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	19.22	0.08356

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.50	19.19	19.19	-	21.69	-
2437MHz	Pass	2.50	19.22	19.22	-	21.72	-
2462MHz	Pass	2.50	19.39	19.39	-	21.89	-
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.50	17.35	17.35	-	19.85	-
2417MHz	Pass	2.50	17.64	17.64	-	20.14	-
2422MHz	Pass	2.50	18.34	18.34	-	20.84	-
2427MHz	Pass	2.50	19.64	19.64	-	22.14	-
2437MHz	Pass	2.50	20.03	20.03	-	22.53	-
2447MHz	Pass	2.50	19.63	19.63	-	22.13	-
2452MHz	Pass	2.50	18.82	18.82	-	21.32	-
2457MHz	Pass	2.50	17.37	17.37	-	19.87	-
2462MHz	Pass	2.50	16.59	16.59	-	19.09	-
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	-	-	-	-	-	-	-
2412MHz	Pass	2.50	14.23	14.23	-	16.73	-
2417MHz	Pass	2.50	15.82	15.82	-	18.32	-
2422MHz	Pass	2.50	17.26	17.26	-	19.76	-
2427MHz	Pass	2.50	18.83	18.83	-	21.33	-
2437MHz	Pass	2.50	19.22	19.22	-	21.72	-
2447MHz	Pass	2.50	19.02	19.02	-	21.52	-
2452MHz	Pass	2.50	18.1	18.10	-	20.60	-
2457MHz	Pass	2.50	16.48	16.48	-	18.98	-
2462MHz	Pass	2.50	13.34	13.34	-	15.84	-

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference

**Conducted Output Power(Peak)****Appendix B****Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	22.02	0.15922
802.11g_Nss1,(6Mbps)_1TX	24.45	0.27861
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	24.21	0.26363

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.50	21.89	21.89	30.00	24.39	36.00
2437MHz	Pass	2.50	21.95	21.95	30.00	24.45	36.00
2462MHz	Pass	2.50	22.02	22.02	30.00	24.52	36.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.50	23.44	23.44	30.00	25.94	36.00
2417MHz	Pass	2.50	23.85	23.85	30.00	26.35	36.00
2422MHz	Pass	2.50	24.02	24.02	30.00	26.52	36.00
2427MHz	Pass	2.50	24.31	24.31	30.00	26.81	36.00
2437MHz	Pass	2.50	24.45	24.45	30.00	26.95	36.00
2447MHz	Pass	2.50	24.29	24.29	30.00	26.79	36.00
2452MHz	Pass	2.50	23.92	23.92	30.00	26.42	36.00
2457MHz	Pass	2.50	23.56	23.56	30.00	26.06	36.00
2462MHz	Pass	2.50	22.89	22.89	30.00	25.39	36.00
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	-	-	-	-	-	-	-
2412MHz	Pass	2.50	23.35	23.35	30.00	25.85	36.00
2417MHz	Pass	2.50	23.49	23.49	30.00	25.99	36.00
2422MHz	Pass	2.50	23.68	23.68	30.00	26.18	36.00
2427MHz	Pass	2.50	24.02	24.02	30.00	26.52	36.00
2437MHz	Pass	2.50	24.21	24.21	30.00	26.71	36.00
2447MHz	Pass	2.50	24.15	24.15	30.00	26.65	36.00
2452MHz	Pass	2.50	23.85	23.85	30.00	26.35	36.00
2457MHz	Pass	2.50	23.65	23.65	30.00	26.15	36.00
2462MHz	Pass	2.50	23.39	23.39	30.00	25.89	36.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-2.75
802.11g_Nss1,(6Mbps)_1TX	-5.13
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	-4.88

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.50	-3.44	-3.44	8.00
2437MHz	Pass	2.50	-2.75	-2.75	8.00
2462MHz	Pass	2.50	-3.72	-3.72	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.50	-7.45	-7.45	8.00
2437MHz	Pass	2.50	-5.13	-5.13	8.00
2462MHz	Pass	2.50	-7.59	-7.59	8.00
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	-	-	-	-	-
2412MHz	Pass	2.50	-11.47	-11.47	8.00
2437MHz	Pass	2.50	-4.88	-4.88	8.00
2462MHz	Pass	2.50	-11.96	-11.96	8.00


DG = Directional Gain; RBW = 3kHz;

PD = Power density; Port X = Port X Power Density;

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD


2412MHz

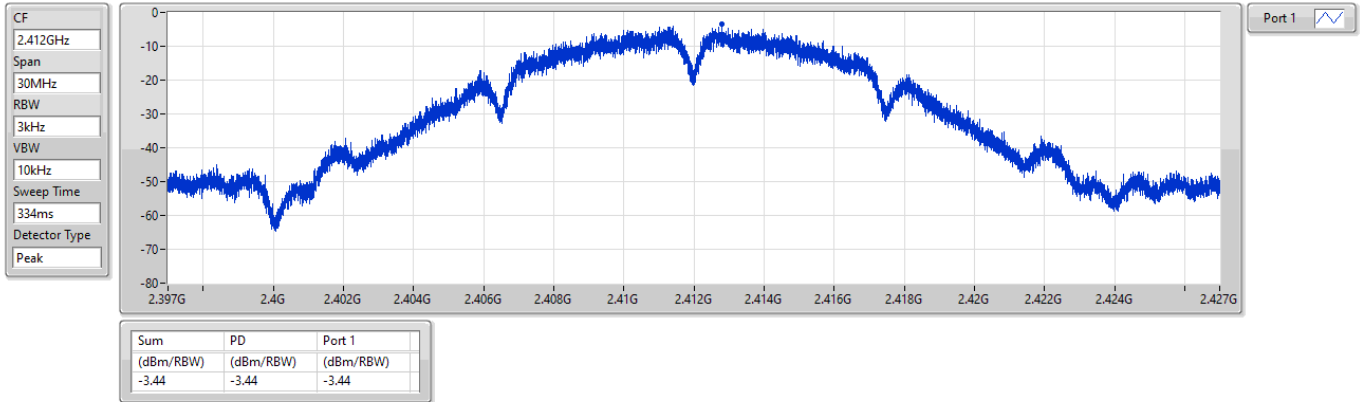

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD

2437MHz

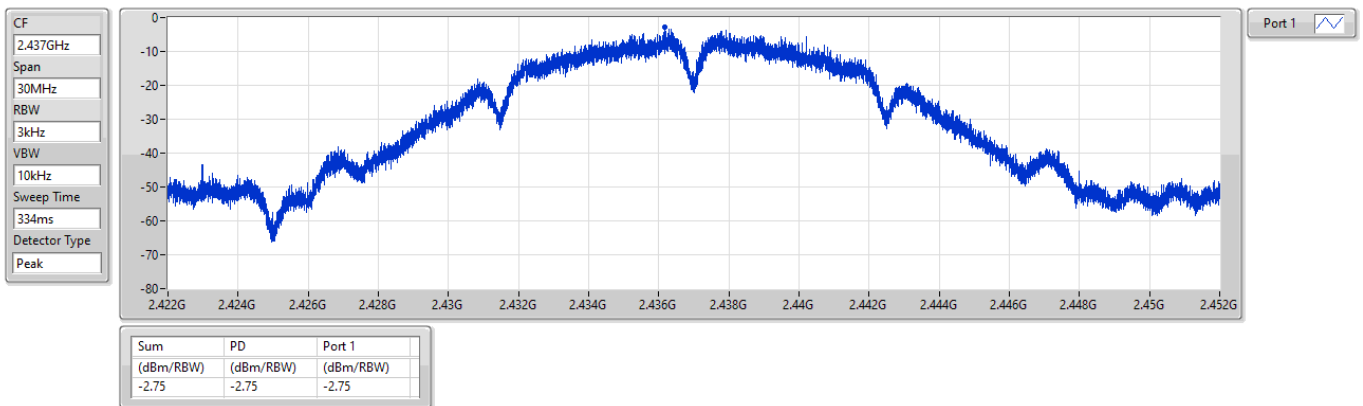




2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD


2462MHz

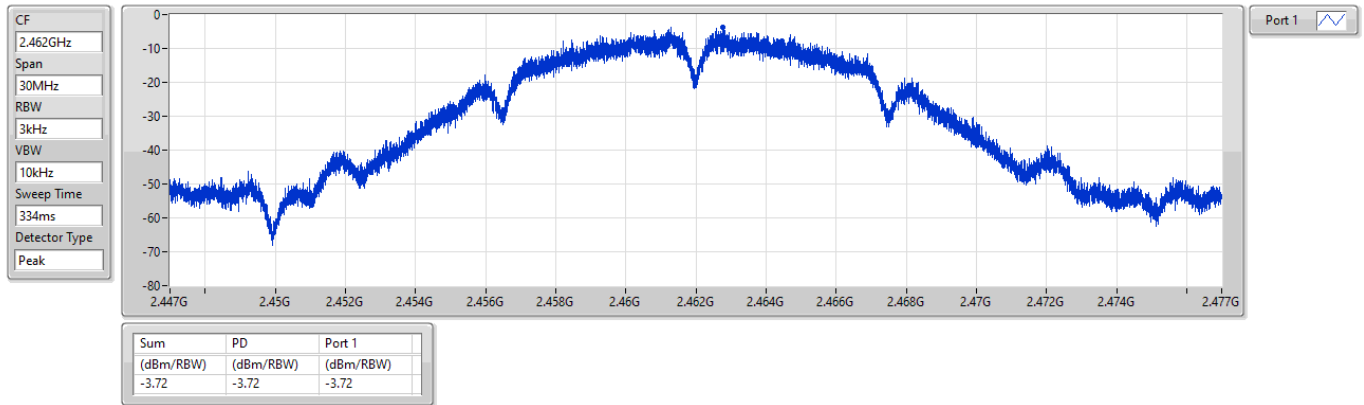

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD

2412MHz

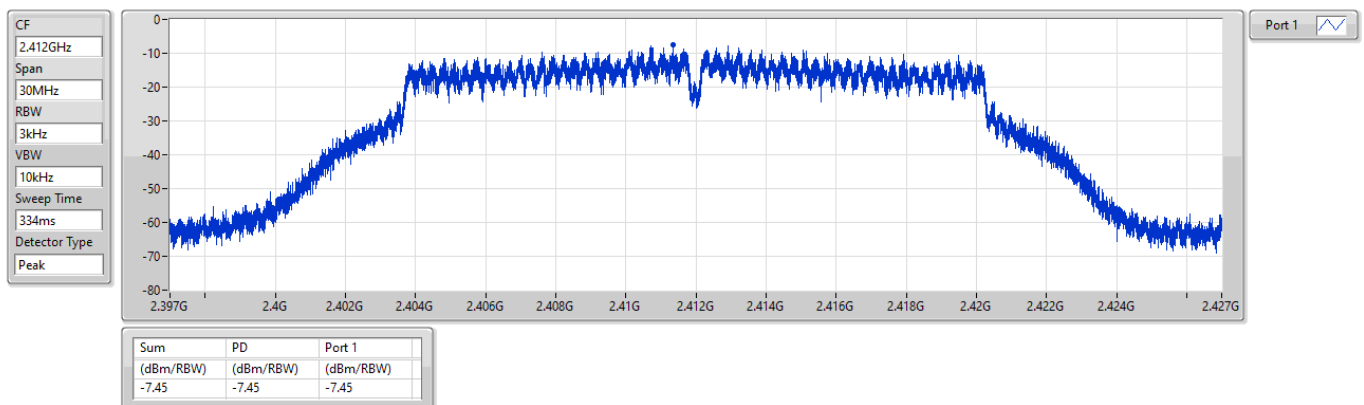




2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD


2437MHz

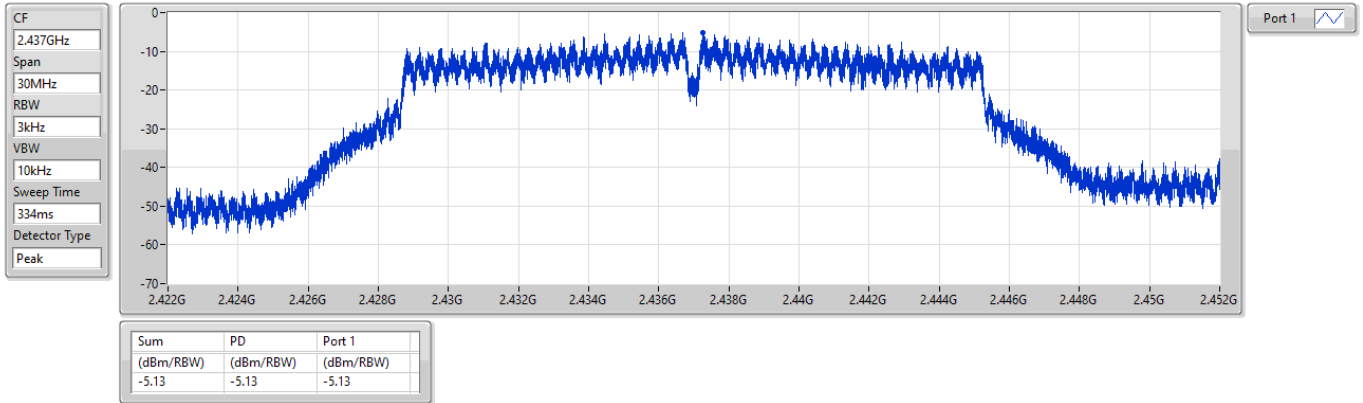

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD

2462MHz

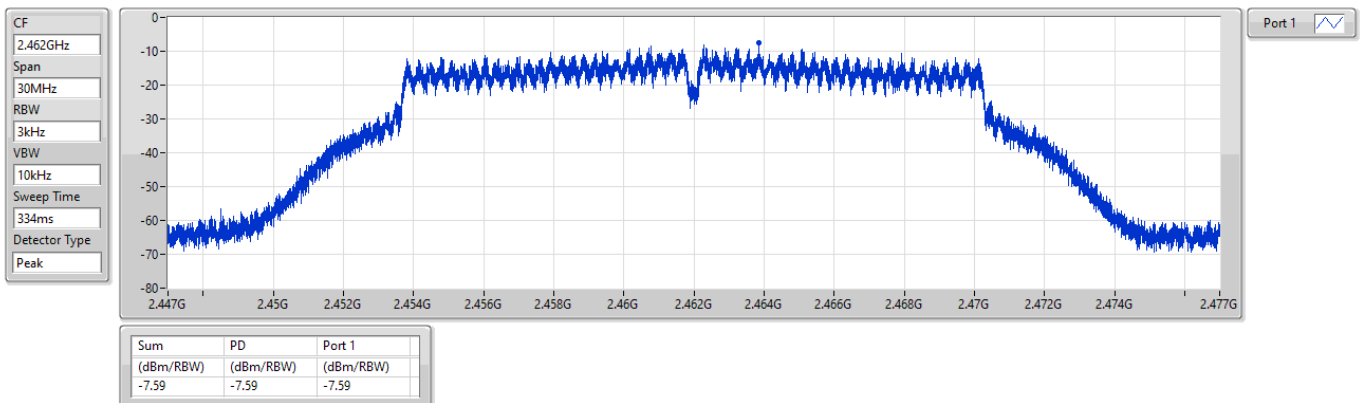




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD


2412MHz

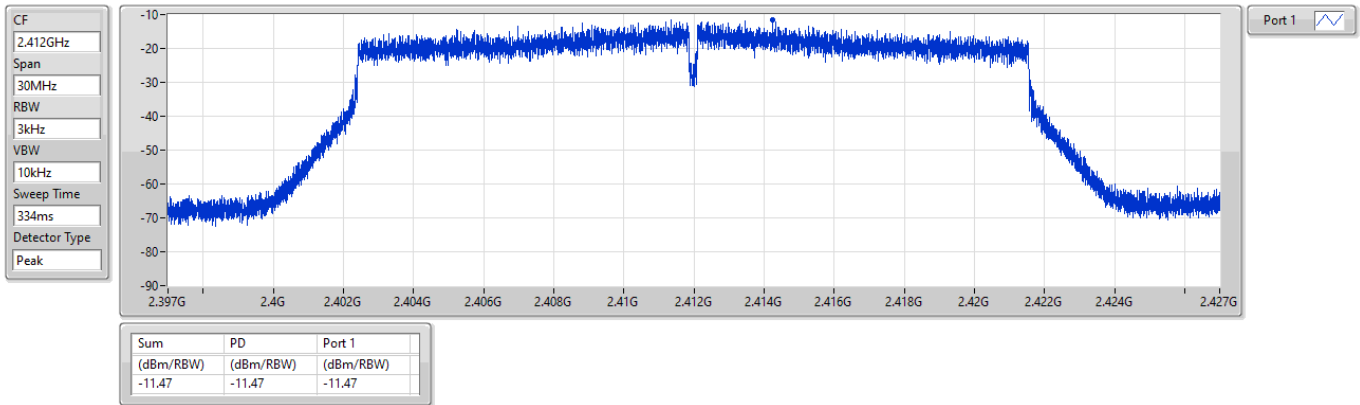

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

2437MHz

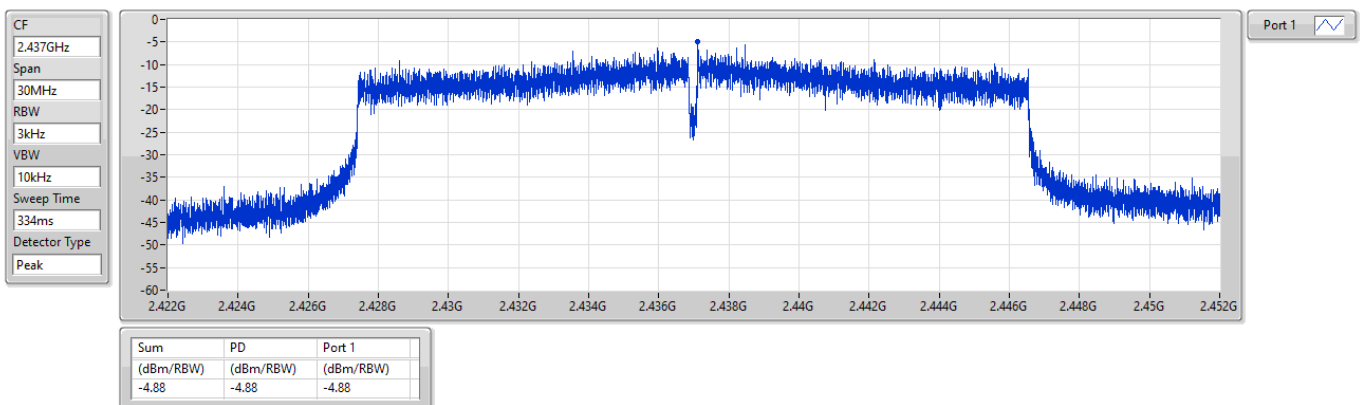




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

2462MHz

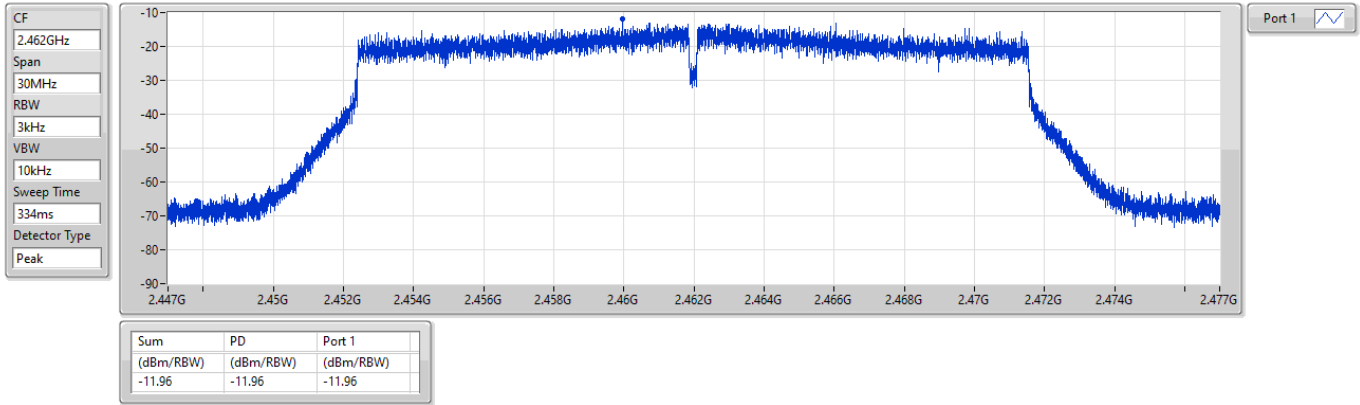



Summary


Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	GRF (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11g_Nss1,(6Mbps)_1TX	Pass	30M	1G	PK	38.1M	2.50	-81.30	-81.30	4.7	-74.10	-55.20	-18.90

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	GRF (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2437MHz	Pass	30M	1G	PK	38.1M	2.50	-81.30	-81.30	4.7	-74.10	-55.20	-18.90

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

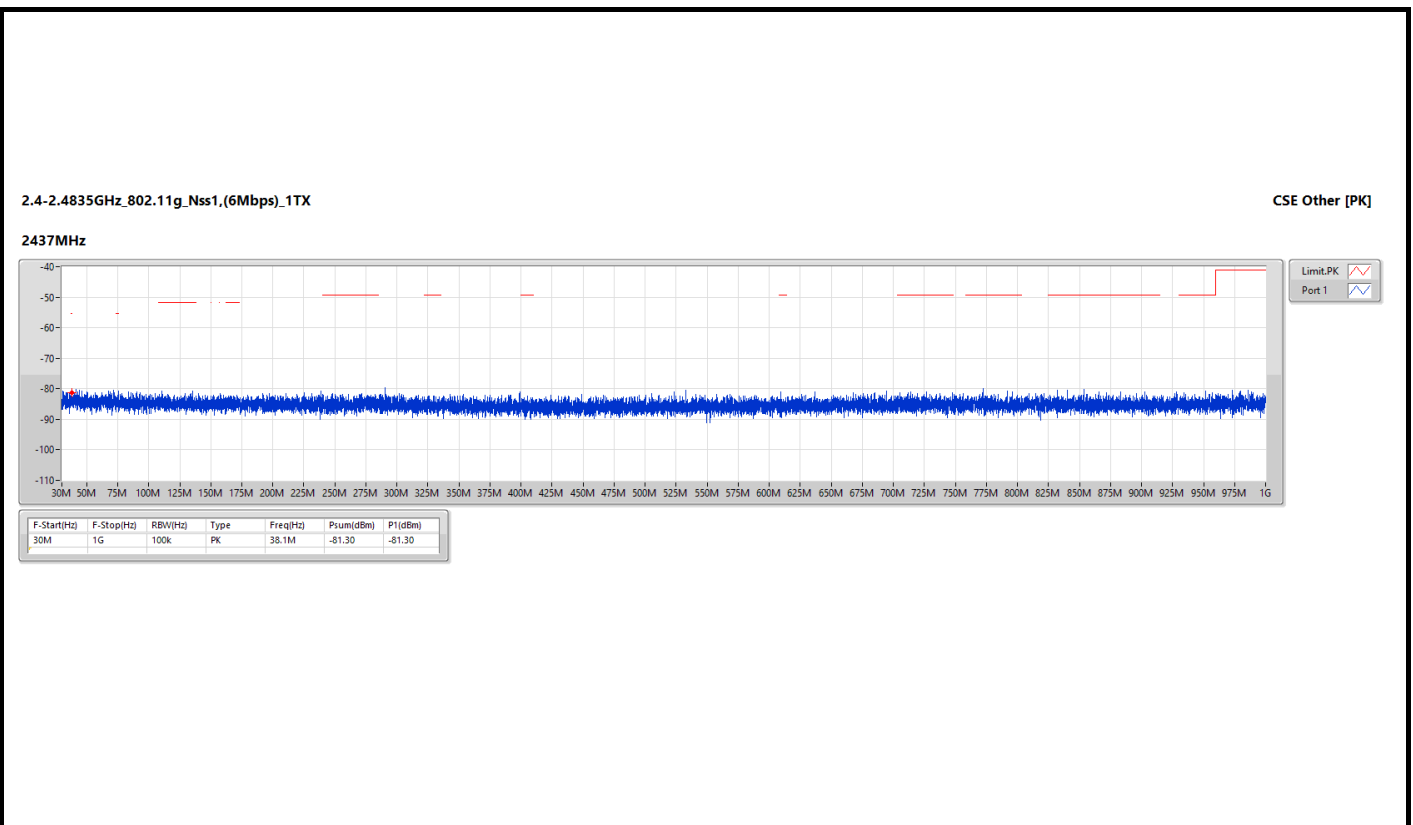

**Summary**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	2.4835G	2.5G	AV	2.48858G	2.50	-48.03	-48.03	-45.53	-41.20	-4.33
802.11g_Nss1,(6Mbps)_1TX	Pass	2.31G	2.39G	AV	2.38984G	2.50	-46.44	-46.44	-43.94	-41.20	-2.74
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	Pass	2.31G	2.39G	PK	2.38776G	2.50	-25.78	-25.78	-23.28	-21.20	-2.08

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.61	-57.61	-55.11	-41.20	-13.91
2412MHz	Pass	2.31G	2.39G	AV	2.387G	2.50	-48.06	-48.06	-45.56	-41.20	-4.36
2412MHz	Pass	2.4835G	2.5G	AV	2.48443G	2.50	-57.55	-57.55	-55.05	-41.20	-13.85
2412MHz	Pass	2.5G	3.1G	AV	2.5114G	2.50	-59.28	-59.28	-56.78	-41.20	-15.58
2412MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.88	-48.88	-46.38	-21.20	-25.18
2412MHz	Pass	2.31G	2.39G	PK	2.38712G	2.50	-40.58	-40.58	-38.08	-21.20	-16.88
2412MHz	Pass	2.4835G	2.5G	PK	2.4841G	2.50	-46.73	-46.73	-44.23	-21.20	-23.03
2412MHz	Pass	2.5G	3.1G	PK	2.5396G	2.50	-48.22	-48.22	-45.72	-21.20	-24.52
2437MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.23	-58.23	-55.73	-41.20	-14.53
2437MHz	Pass	2.31G	2.39G	AV	2.3896G	2.50	-56.95	-56.95	-54.45	-41.20	-13.25
2437MHz	Pass	2.4835G	2.5G	AV	2.48545G	2.50	-56.81	-56.81	-54.31	-41.20	-13.11
2437MHz	Pass	2.5G	3.1G	AV	2.5105G	2.50	-58.45	-58.45	-55.95	-41.20	-14.75
2437MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.96	-48.96	-46.46	-21.20	-25.26
2437MHz	Pass	2.31G	2.39G	PK	2.38176G	2.50	-45.56	-45.56	-43.06	-21.20	-21.86
2437MHz	Pass	2.4835G	2.5G	PK	2.49538G	2.50	-45.33	-45.33	-42.83	-21.20	-21.63
2437MHz	Pass	2.5G	3.1G	PK	2.5105G	2.50	-48.17	-48.17	-45.67	-21.20	-24.47
2462MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.75	-58.75	-56.25	-41.20	-15.05
2462MHz	Pass	2.31G	2.39G	AV	2.3854G	2.50	-57.75	-57.75	-55.25	-41.20	-14.05
2462MHz	Pass	2.4835G	2.5G	AV	2.48858G	2.50	-48.03	-48.03	-45.53	-41.20	-4.33
2462MHz	Pass	2.5G	3.1G	AV	2.5024G	2.50	-56.92	-56.92	-54.42	-41.20	-13.22
2462MHz	Pass	1G	2.31G	PK	2.31G	2.50	-50.28	-50.28	-47.78	-21.20	-26.58
2462MHz	Pass	2.31G	2.39G	PK	2.382G	2.50	-45.90	-45.90	-43.40	-21.20	-22.20
2462MHz	Pass	2.4835G	2.5G	PK	2.48552G	2.50	-40.09	-40.09	-37.59	-21.20	-16.39
2462MHz	Pass	2.5G	3.1G	PK	2.5051G	2.50	-46.53	-46.53	-44.03	-21.20	-22.83
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.61	-57.61	-55.11	-41.20	-13.91
2412MHz	Pass	2.31G	2.39G	AV	2.38996G	2.50	-46.50	-46.50	-44.00	-41.20	-2.80
2412MHz	Pass	2.4835G	2.5G	AV	2.4841G	2.50	-57.16	-57.16	-54.66	-41.20	-13.46
2412MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-58.75	-58.75	-56.25	-41.20	-15.05
2412MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.36	-48.36	-45.86	-21.20	-24.66
2412MHz	Pass	2.31G	2.39G	PK	2.3842G	2.50	-34.16	-34.16	-31.66	-21.20	-10.46
2412MHz	Pass	2.4835G	2.5G	PK	2.49423G	2.50	-45.96	-45.96	-43.46	-21.20	-22.26
2412MHz	Pass	2.5G	3.1G	PK	2.5042G	2.50	-48.25	-48.25	-45.75	-21.20	-24.55
2417MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.54	-57.54	-55.04	-41.20	-13.84
2417MHz	Pass	2.31G	2.39G	AV	2.38912G	2.50	-49.82	-49.82	-47.32	-41.20	-6.12
2417MHz	Pass	2.4835G	2.5G	AV	2.48395G	2.50	-56.92	-56.92	-54.42	-41.20	-13.22
2417MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-58.26	-58.26	-55.76	-41.20	-14.56
2417MHz	Pass	1G	2.31G	PK	2.31G	2.50	-47.30	-47.30	-44.80	-21.20	-23.60
2417MHz	Pass	2.31G	2.39G	PK	2.38984G	2.50	-34.34	-34.34	-31.84	-21.20	-10.64
2417MHz	Pass	2.4835G	2.5G	PK	2.48416G	2.50	-45.50	-45.50	-43.00	-21.20	-21.80
2417MHz	Pass	2.5G	3.1G	PK	2.5048G	2.50	-47.42	-47.42	-44.92	-21.20	-23.72
2422MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.73	-57.73	-55.23	-41.20	-14.03
2422MHz	Pass	2.31G	2.39G	AV	2.38996G	2.50	-47.78	-47.78	-45.28	-41.20	-4.08
2422MHz	Pass	2.4835G	2.5G	AV	2.48491G	2.50	-56.23	-56.23	-53.73	-41.20	-12.53

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2422MHz	Pass	2.5G	3.1G	AV	2.5051G	2.50	-57.89	-57.89	-55.39	-41.20	-14.19
2422MHz	Pass	1G	2.31G	PK	2.31G	2.50	-47.94	-47.94	-45.44	-21.20	-24.24
2422MHz	Pass	2.31G	2.39G	PK	2.38756G	2.50	-32.73	-32.73	-30.23	-21.20	-9.03
2422MHz	Pass	2.4835G	2.5G	PK	2.48363G	2.50	-44.35	-44.35	-41.85	-21.20	-20.65
2422MHz	Pass	2.5G	3.1G	PK	2.5003G	2.50	-46.40	-46.40	-43.90	-21.20	-22.70
2427MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.47	-57.47	-54.97	-41.20	-13.77
2427MHz	Pass	2.31G	2.39G	AV	2.38984G	2.50	-46.44	-46.44	-43.94	-41.20	-2.74
2427MHz	Pass	2.4835G	2.5G	AV	2.48357G	2.50	-53.68	-53.68	-51.18	-41.20	-9.98
2427MHz	Pass	2.5G	3.1G	AV	2.5039G	2.50	-57.09	-57.09	-54.59	-41.20	-13.39
2427MHz	Pass	1G	2.31G	PK	2.31G	2.50	-47.19	-47.19	-44.69	-21.20	-23.49
2427MHz	Pass	2.31G	2.39G	PK	2.38996G	2.50	-31.94	-31.94	-29.44	-21.20	-8.24
2427MHz	Pass	2.4835G	2.5G	PK	2.48469G	2.50	-39.70	-39.70	-37.20	-21.20	-16.00
2427MHz	Pass	2.5G	3.1G	PK	2.5009G	2.50	-46.74	-46.74	-44.24	-21.20	-23.04
2437MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.69	-57.69	-55.19	-41.20	-13.99
2437MHz	Pass	2.31G	2.39G	AV	2.38936G	2.50	-48.70	-48.70	-46.20	-41.20	-5.00
2437MHz	Pass	2.4835G	2.5G	AV	2.48357G	2.50	-50.17	-50.17	-47.67	-41.20	-6.47
2437MHz	Pass	2.5G	3.1G	AV	2.5009G	2.50	-55.36	-55.36	-52.86	-41.20	-11.66
2437MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.14	-48.14	-45.64	-21.20	-24.44
2437MHz	Pass	2.31G	2.39G	PK	2.38964G	2.50	-33.20	-33.20	-30.70	-21.20	-9.50
2437MHz	Pass	2.4835G	2.5G	PK	2.48364G	2.50	-35.15	-35.15	-32.65	-21.20	-11.45
2437MHz	Pass	2.5G	3.1G	PK	2.515G	2.50	-44.05	-44.05	-41.55	-21.20	-20.35
2447MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.92	-57.92	-55.42	-41.20	-14.22
2447MHz	Pass	2.31G	2.39G	AV	2.38996G	2.50	-53.79	-53.79	-51.29	-41.20	-10.09
2447MHz	Pass	2.4835G	2.5G	AV	2.48365G	2.50	-46.48	-46.48	-43.98	-41.20	-2.78
2447MHz	Pass	2.5G	3.1G	AV	2.5009G	2.50	-53.56	-53.56	-51.06	-41.20	-9.86
2447MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.52	-48.52	-46.02	-21.20	-24.82
2447MHz	Pass	2.31G	2.39G	PK	2.3884G	2.50	-41.62	-41.62	-39.12	-21.20	-17.92
2447MHz	Pass	2.4835G	2.5G	PK	2.48354G	2.50	-33.04	-33.04	-30.54	-21.20	-9.34
2447MHz	Pass	2.5G	3.1G	PK	2.5012G	2.50	-38.98	-38.98	-36.48	-21.20	-15.28
2452MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.77	-57.77	-55.27	-41.20	-14.07
2452MHz	Pass	2.31G	2.39G	AV	2.3892G	2.50	-55.77	-55.77	-53.27	-41.20	-12.07
2452MHz	Pass	2.4835G	2.5G	AV	2.48357G	2.50	-46.50	-46.50	-44.00	-41.20	-2.80
2452MHz	Pass	2.5G	3.1G	AV	2.5003G	2.50	-53.75	-53.75	-51.25	-41.20	-10.05
2452MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.29	-48.29	-45.79	-21.20	-24.59
2452MHz	Pass	2.31G	2.39G	PK	2.38976G	2.50	-43.79	-43.79	-41.29	-21.20	-20.09
2452MHz	Pass	2.4835G	2.5G	PK	2.48351G	2.50	-30.93	-30.93	-28.43	-21.20	-7.23
2452MHz	Pass	2.5G	3.1G	PK	2.503G	2.50	-41.36	-41.36	-38.86	-21.20	-17.66
2457MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.23	-58.23	-55.73	-41.20	-14.53
2457MHz	Pass	2.31G	2.39G	AV	2.38088G	2.50	-57.22	-57.22	-54.72	-41.20	-13.52
2457MHz	Pass	2.4835G	2.5G	AV	2.48356G	2.50	-47.03	-47.03	-44.53	-41.20	-3.33
2457MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-54.61	-54.61	-52.11	-41.20	-10.91
2457MHz	Pass	1G	2.31G	PK	2.31G	2.50	-47.09	-47.09	-44.59	-21.20	-23.39
2457MHz	Pass	2.31G	2.39G	PK	2.35888G	2.50	-46.16	-46.16	-43.66	-21.20	-22.46
2457MHz	Pass	2.4835G	2.5G	PK	2.48408G	2.50	-33.86	-33.86	-31.36	-21.20	-10.16
2457MHz	Pass	2.5G	3.1G	PK	2.5015G	2.50	-43.95	-43.95	-41.45	-21.20	-20.25
2462MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.46	-58.46	-55.96	-41.20	-14.76

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2462MHz	Pass	2.31G	2.39G	AV	2.38672G	2.50	-57.58	-57.58	-55.08	-41.20	-13.88
2462MHz	Pass	2.4835G	2.5G	AV	2.48362G	2.50	-47.05	-47.05	-44.55	-41.20	-3.35
2462MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-54.33	-54.33	-51.83	-41.20	-10.63
2462MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.90	-48.90	-46.40	-21.20	-25.20
2462MHz	Pass	2.31G	2.39G	PK	2.38404G	2.50	-46.00	-46.00	-43.50	-21.20	-22.30
2462MHz	Pass	2.4835G	2.5G	PK	2.48359G	2.50	-33.83	-33.83	-31.33	-21.20	-10.13
2462MHz	Pass	2.5G	3.1G	PK	2.5018G	2.50	-42.93	-42.93	-40.43	-21.20	-19.23
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.47	-58.47	-55.97	-41.20	-14.77
2412MHz	Pass	2.31G	2.39G	AV	2.3896G	2.50	-51.28	-51.28	-48.78	-41.20	-7.58
2412MHz	Pass	2.4835G	2.5G	AV	2.48399G	2.50	-58.51	-58.51	-56.01	-41.20	-14.81
2412MHz	Pass	2.5G	3.1G	AV	2.5033G	2.50	-59.60	-59.60	-57.10	-41.20	-15.90
2412MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.10	-48.10	-45.60	-21.20	-24.40
2412MHz	Pass	2.31G	2.39G	PK	2.38972G	2.50	-26.28	-26.28	-23.78	-21.20	-2.58
2412MHz	Pass	2.4835G	2.5G	PK	2.48734G	2.50	-47.07	-47.07	-44.57	-21.20	-23.37
2412MHz	Pass	2.5G	3.1G	PK	2.5435G	2.50	-48.29	-48.29	-45.79	-21.20	-24.59
2417MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.52	-58.52	-56.02	-41.20	-14.82
2417MHz	Pass	2.31G	2.39G	AV	2.3898G	2.50	-50.79	-50.79	-48.29	-41.20	-7.09
2417MHz	Pass	2.4835G	2.5G	AV	2.48371G	2.50	-58.08	-58.08	-55.58	-41.20	-14.38
2417MHz	Pass	2.5G	3.1G	AV	2.5003G	2.50	-59.30	-59.30	-56.80	-41.20	-15.60
2417MHz	Pass	1G	2.31G	PK	2.31G	2.50	-49.31	-49.31	-46.81	-21.20	-25.61
2417MHz	Pass	2.31G	2.39G	PK	2.38776G	2.50	-25.78	-25.78	-23.28	-21.20	-2.08
2417MHz	Pass	2.4835G	2.5G	PK	2.48494G	2.50	-45.03	-45.03	-42.53	-21.20	-21.33
2417MHz	Pass	2.5G	3.1G	PK	2.5258G	2.50	-48.52	-48.52	-46.02	-21.20	-24.82
2422MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.64	-58.64	-56.14	-41.20	-14.94
2422MHz	Pass	2.31G	2.39G	AV	2.38988G	2.50	-49.02	-49.02	-46.52	-41.20	-5.32
2422MHz	Pass	2.4835G	2.5G	AV	2.4835G	2.50	-56.98	-56.98	-54.48	-41.20	-13.28
2422MHz	Pass	2.5G	3.1G	AV	2.5003G	2.50	-58.70	-58.70	-56.20	-41.20	-15.00
2422MHz	Pass	1G	2.31G	PK	2.31G	2.50	-49.24	-49.24	-46.74	-21.20	-25.54
2422MHz	Pass	2.31G	2.39G	PK	2.38888G	2.50	-26.29	-26.29	-23.79	-21.20	-2.59
2422MHz	Pass	2.4835G	2.5G	PK	2.48449G	2.50	-39.70	-39.70	-37.20	-21.20	-16.00
2422MHz	Pass	2.5G	3.1G	PK	2.5465G	2.50	-48.16	-48.16	-45.66	-21.20	-24.46
2427MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.00	-58.00	-55.50	-41.20	-14.30
2427MHz	Pass	2.31G	2.39G	AV	2.39G	2.50	-49.54	-49.54	-47.04	-41.20	-5.84
2427MHz	Pass	2.4835G	2.5G	AV	2.48369G	2.50	-52.90	-52.90	-50.40	-41.20	-9.20
2427MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-57.10	-57.10	-54.60	-41.20	-13.40
2427MHz	Pass	1G	2.31G	PK	2.31G	2.50	-47.08	-47.08	-44.58	-21.20	-23.38
2427MHz	Pass	2.31G	2.39G	PK	2.38816G	2.50	-26.51	-26.51	-24.01	-21.20	-2.81
2427MHz	Pass	2.4835G	2.5G	PK	2.48383G	2.50	-35.09	-35.09	-32.59	-21.20	-11.39
2427MHz	Pass	2.5G	3.1G	PK	2.5024G	2.50	-46.29	-46.29	-43.79	-21.20	-22.59
2437MHz	Pass	1G	2.31G	AV	2.31G	2.50	-57.80	-57.80	-55.30	-41.20	-14.10
2437MHz	Pass	2.31G	2.39G	AV	2.38984G	2.50	-46.89	-46.89	-44.39	-41.20	-3.19
2437MHz	Pass	2.4835G	2.5G	AV	2.48352G	2.50	-48.81	-48.81	-46.31	-41.20	-5.11
2437MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-54.51	-54.51	-52.01	-41.20	-10.81
2437MHz	Pass	1G	2.31G	PK	2.31G	2.50	-49.51	-49.51	-47.01	-21.20	-25.81


Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2437MHz	Pass	2.31G	2.39G	PK	2.38964G	2.50	-25.83	-25.83	-23.33	-21.20	-2.13
2437MHz	Pass	2.4835G	2.5G	PK	2.48626G	2.50	-30.89	-30.89	-28.39	-21.20	-7.19
2437MHz	Pass	2.5G	3.1G	PK	2.5069G	2.50	-40.09	-40.09	-37.59	-21.20	-16.39
2447MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.24	-58.24	-55.74	-41.20	-14.54
2447MHz	Pass	2.31G	2.39G	AV	2.39G	2.50	-54.13	-54.13	-51.63	-41.20	-10.43
2447MHz	Pass	2.4835G	2.5G	AV	2.48362G	2.50	-46.88	-46.88	-44.38	-41.20	-3.18
2447MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-53.29	-53.29	-50.79	-41.20	-9.59
2447MHz	Pass	1G	2.31G	PK	2.31G	2.50	-46.30	-46.30	-43.80	-21.20	-22.60
2447MHz	Pass	2.31G	2.39G	PK	2.38688G	2.50	-36.48	-36.48	-33.98	-21.20	-12.78
2447MHz	Pass	2.4835G	2.5G	PK	2.48906G	2.50	-28.63	-28.63	-26.13	-21.20	-4.93
2447MHz	Pass	2.5G	3.1G	PK	2.5018G	2.50	-40.09	-40.09	-37.59	-21.20	-16.39
2452MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.40	-58.40	-55.90	-41.20	-14.70
2452MHz	Pass	2.31G	2.39G	AV	2.38912G	2.50	-56.45	-56.45	-53.95	-41.20	-12.75
2452MHz	Pass	2.4835G	2.5G	AV	2.48352G	2.50	-46.53	-46.53	-44.03	-41.20	-2.83
2452MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-53.78	-53.78	-51.28	-41.20	-10.08
2452MHz	Pass	1G	2.31G	PK	2.31G	2.50	-49.61	-49.61	-47.11	-21.20	-25.91
2452MHz	Pass	2.31G	2.39G	PK	2.38404G	2.50	-40.33	-40.33	-37.83	-21.20	-16.63
2452MHz	Pass	2.4835G	2.5G	PK	2.48354G	2.50	-26.24	-26.24	-23.74	-21.20	-2.54
2452MHz	Pass	2.5G	3.1G	PK	2.5003G	2.50	-40.70	-40.70	-38.20	-21.20	-17.00
2457MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.81	-58.81	-56.31	-41.20	-15.11
2457MHz	Pass	2.31G	2.39G	AV	2.38936G	2.50	-58.16	-58.16	-55.66	-41.20	-14.46
2457MHz	Pass	2.4835G	2.5G	AV	2.48356G	2.50	-47.15	-47.15	-44.65	-41.20	-3.45
2457MHz	Pass	2.5G	3.1G	AV	2.5G	2.50	-55.10	-55.10	-52.60	-41.20	-11.40
2457MHz	Pass	1G	2.31G	PK	2.31G	2.50	-49.15	-49.15	-46.65	-21.20	-25.45
2457MHz	Pass	2.31G	2.39G	PK	2.37972G	2.50	-46.51	-46.51	-44.01	-21.20	-22.81
2457MHz	Pass	2.4835G	2.5G	PK	2.48357G	2.50	-25.87	-25.87	-23.37	-21.20	-2.17
2457MHz	Pass	2.5G	3.1G	PK	2.5G	2.50	-41.93	-41.93	-39.43	-21.20	-18.23
2462MHz	Pass	1G	2.31G	AV	2.31G	2.50	-58.88	-58.88	-56.38	-41.20	-15.18
2462MHz	Pass	2.31G	2.39G	AV	2.38136G	2.50	-59.12	-59.12	-56.62	-41.20	-15.42
2462MHz	Pass	2.4835G	2.5G	AV	2.48385G	2.50	-51.20	-51.20	-48.70	-41.20	-7.50
2462MHz	Pass	2.5G	3.1G	AV	2.5006G	2.50	-57.48	-57.48	-54.98	-41.20	-13.78
2462MHz	Pass	1G	2.31G	PK	2.31G	2.50	-48.19	-48.19	-45.69	-21.20	-24.49
2462MHz	Pass	2.31G	2.39G	PK	2.37468G	2.50	-47.48	-47.48	-44.98	-21.20	-23.78
2462MHz	Pass	2.4835G	2.5G	PK	2.48412G	2.50	-25.83	-25.83	-23.33	-21.20	-2.13
2462MHz	Pass	2.5G	3.1G	PK	2.5039G	2.50	-45.47	-45.47	-42.97	-21.20	-21.77

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE Bandedge [PK]

2412MHz

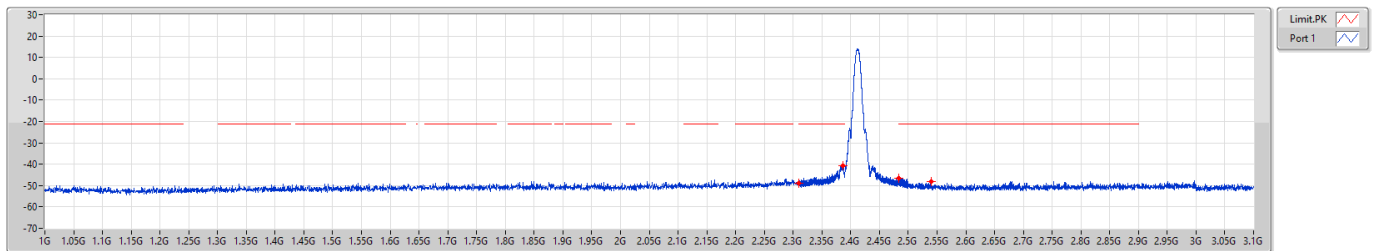


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-48.88	-48.88
2.31G	2.39G	1M	PK	2.38712G	-40.58	-40.58
2.4835G	2.5G	1M	PK	2.4841G	-46.73	-46.73
2.5G	3.1G	1M	PK	2.5396G	-48.22	-48.22

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE Bandedge [AV]

2412MHz

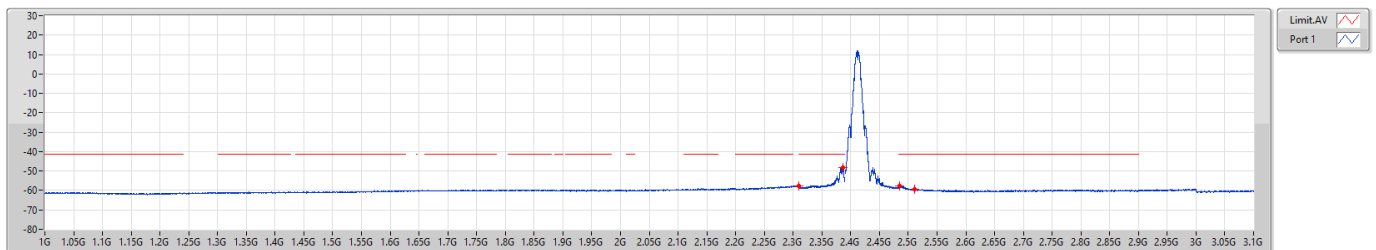


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-57.61	-57.61
2.31G	2.39G	1M	AV	2.387G	-48.06	-48.06
2.4835G	2.5G	1M	AV	2.48443G	-57.55	-57.55
2.5G	3.1G	1M	AV	2.5114G	-59.28	-59.28



2.4-2.4835GHz_802.11b_Nss1_(1Mbps)_1TX

CSE Bandedge [PK]

2437MHz

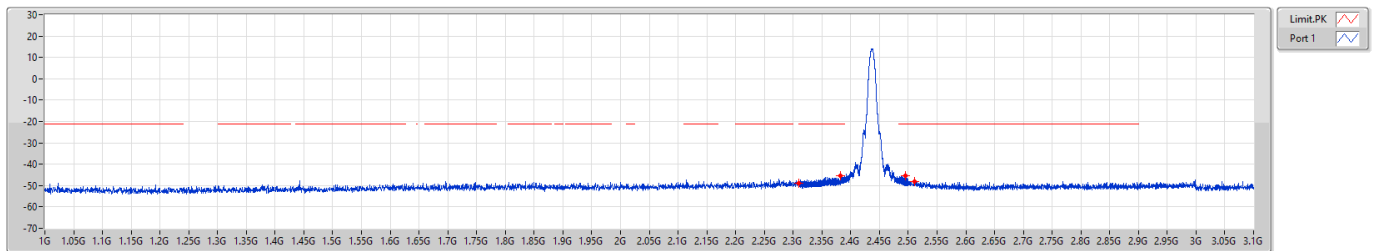


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-48.96	-48.96
2.31G	2.39G	1M	PK	2.38176G	-45.56	-45.56
2.4835G	2.5G	1M	PK	2.48538G	-45.33	-45.33
2.5G	3.1G	1M	PK	2.5105G	-48.17	-48.17

2.4-2.4835GHz_802.11b_Nss1_(1Mbps)_1TX

CSE Bandedge [AV]

2437MHz

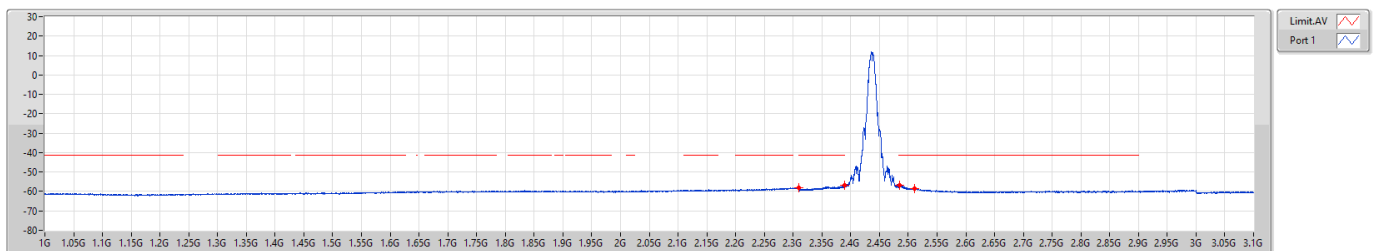


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-58.23	-58.23
2.31G	2.39G	1M	AV	2.3896G	-56.95	-56.95
2.4835G	2.5G	1M	AV	2.48545G	-56.81	-56.81
2.5G	3.1G	1M	AV	2.5105G	-58.45	-58.45



2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE Bandedge [PK]

2462MHz

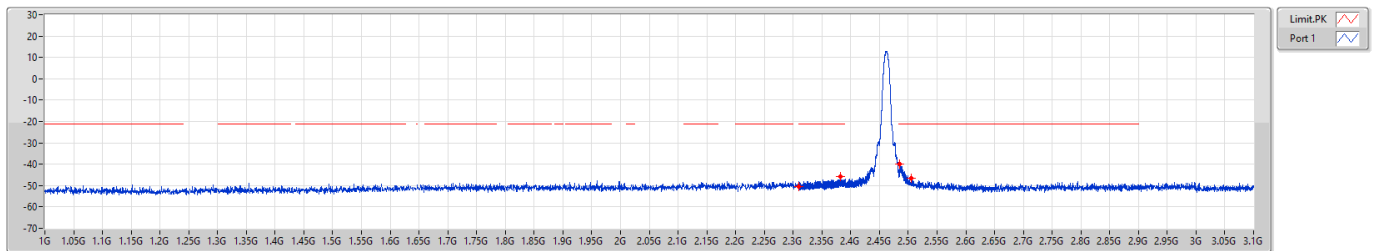


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-50.28	-50.28
2.31G	2.39G	1M	PK	2.382G	-45.90	-45.90
2.4835G	2.5G	1M	PK	2.48552G	-40.09	-40.09
2.5G	3.1G	1M	PK	2.5051G	-46.53	-46.53

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE Bandedge [AV]

2462MHz

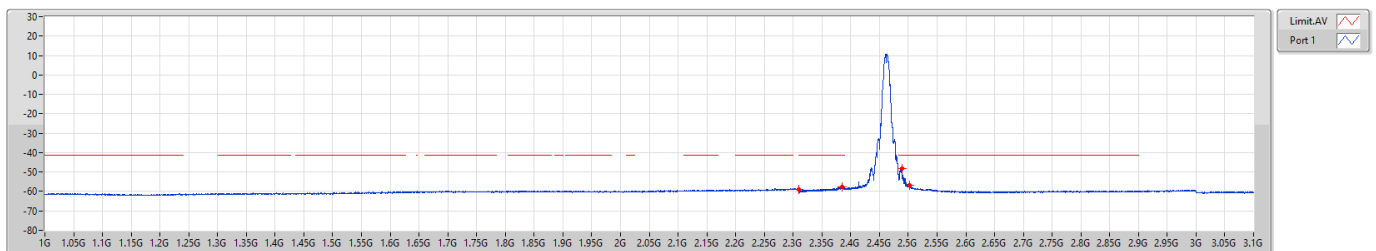


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-58.75	-58.75
2.31G	2.39G	1M	AV	2.3854G	-57.75	-57.75
2.4835G	2.5G	1M	AV	2.48858G	-48.03	-48.03
2.5G	3.1G	1M	AV	2.5024G	-56.92	-56.92



2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]


2412MHz

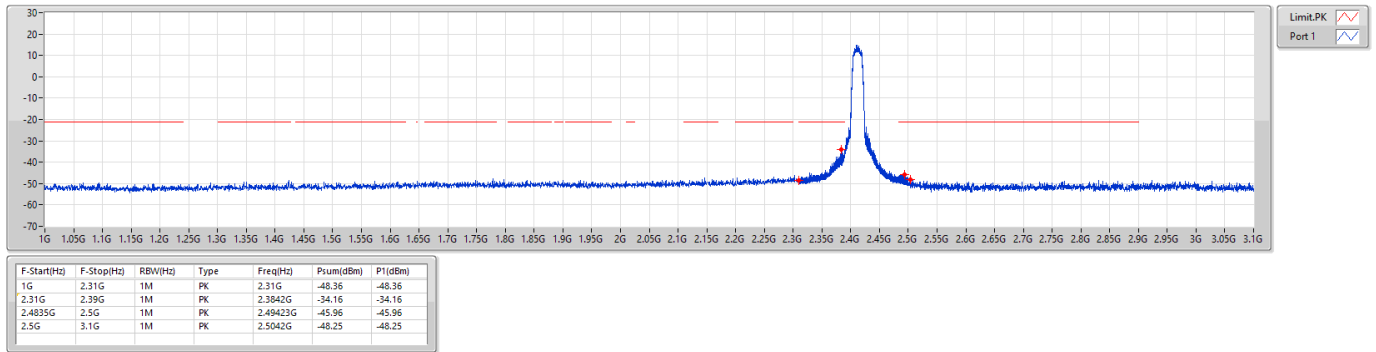

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2412MHz

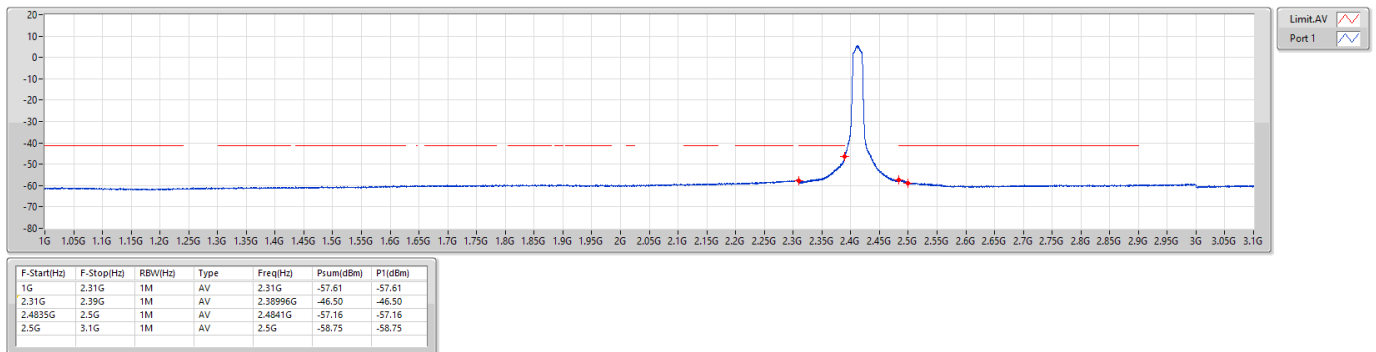




2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]

2417MHz

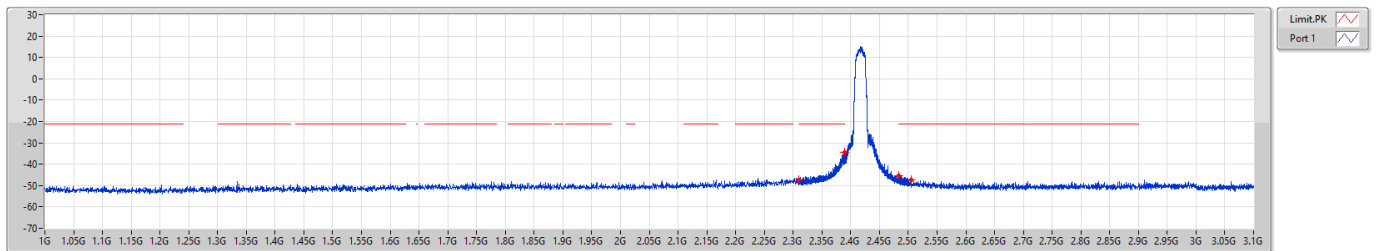


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-47.30	-47.30
2.31G	2.39G	1M	PK	2.38904G	-34.34	-34.34
2.4835G	2.5G	1M	PK	2.48416G	-45.50	-45.50
2.5G	3.1G	1M	PK	2.5048G	-47.42	-47.42

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2417MHz

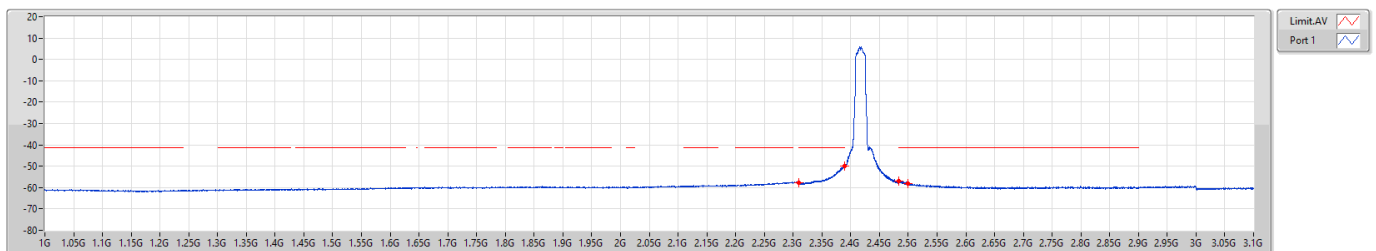


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-57.54	-57.54
2.31G	2.39G	1M	AV	2.38912G	-49.82	-49.82
2.4835G	2.5G	1M	AV	2.48395G	-56.92	-56.92
2.5G	3.1G	1M	AV	2.5G	-58.26	-58.26



2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]

2422MHz

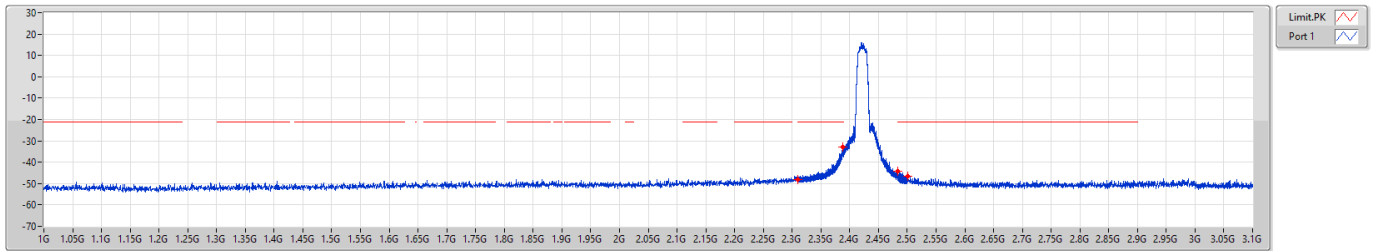


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-47.94	-47.94
2.31G	2.39G	1M	PK	2.38756G	-32.73	-32.73
2.4835G	2.5G	1M	PK	2.48363G	-44.35	-44.35
2.5G	3.1G	1M	PK	2.5003G	-46.40	-46.40

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2422MHz

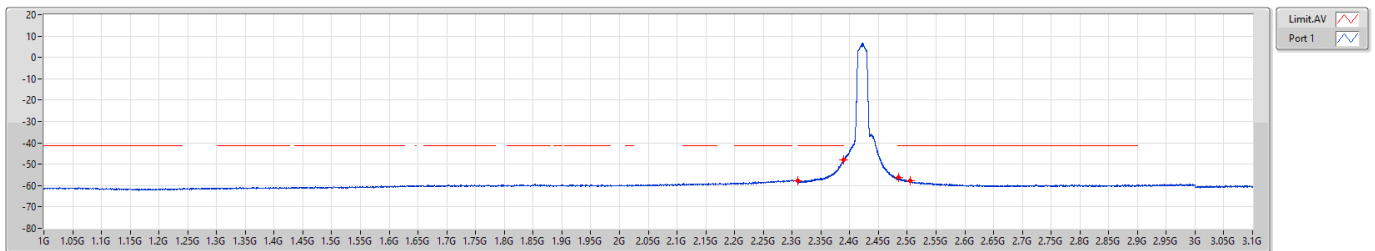


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-57.73	-57.73
2.31G	2.39G	1M	AV	2.38996G	-47.78	-47.78
2.4835G	2.5G	1M	AV	2.48491G	-56.23	-56.23
2.5G	3.1G	1M	AV	2.5051G	-57.89	-57.89



2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]

2427MHz

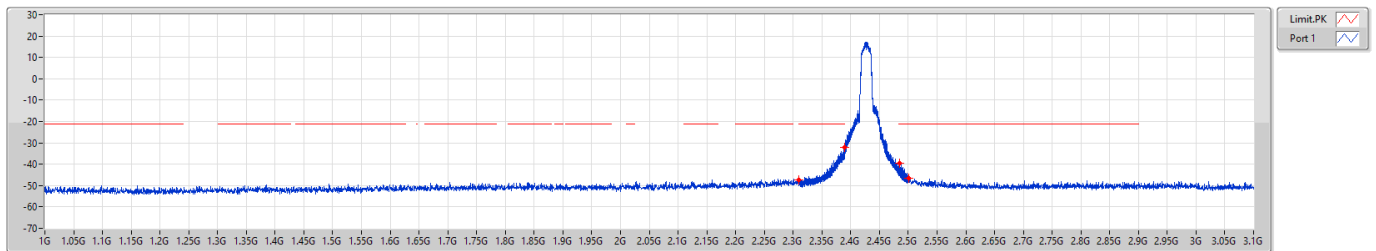


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-47.19	-47.19
2.31G	2.39G	1M	PK	2.38996G	-31.94	-31.94
2.4835G	2.5G	1M	PK	2.48469G	-39.70	-39.70
2.5G	3.1G	1M	PK	2.5009G	-46.74	-46.74

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2427MHz

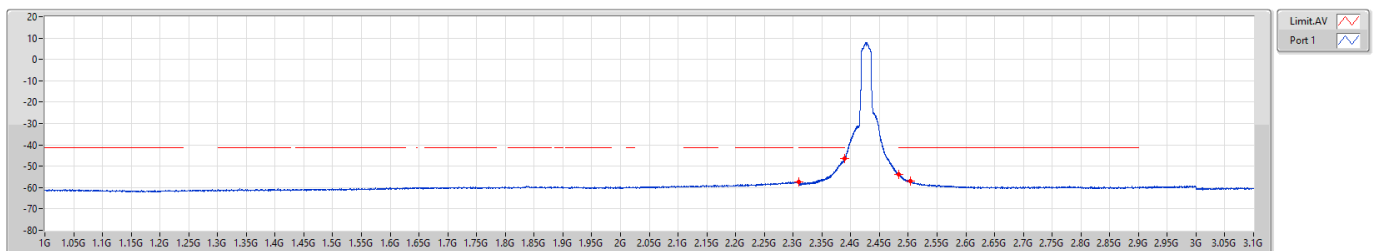


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-57.47	-57.47
2.31G	2.39G	1M	AV	2.38984G	-46.44	-46.44
2.4835G	2.5G	1M	AV	2.48357G	-53.68	-53.68
2.5G	3.1G	1M	AV	2.5039G	-57.09	-57.09

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]

2437MHz

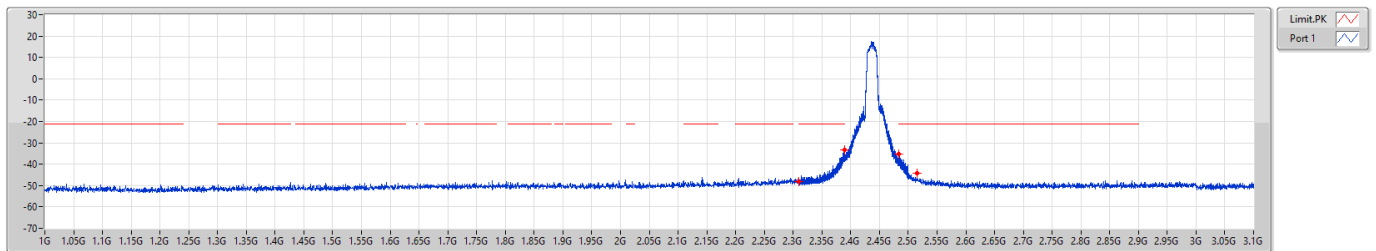


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-48.14	-48.14
2.31G	2.39G	1M	PK	2.38964G	-33.20	-33.20
2.4835G	2.5G	1M	PK	2.48364G	-35.15	-35.15
2.5G	3.1G	1M	PK	2.515G	-44.05	-44.05

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2437MHz

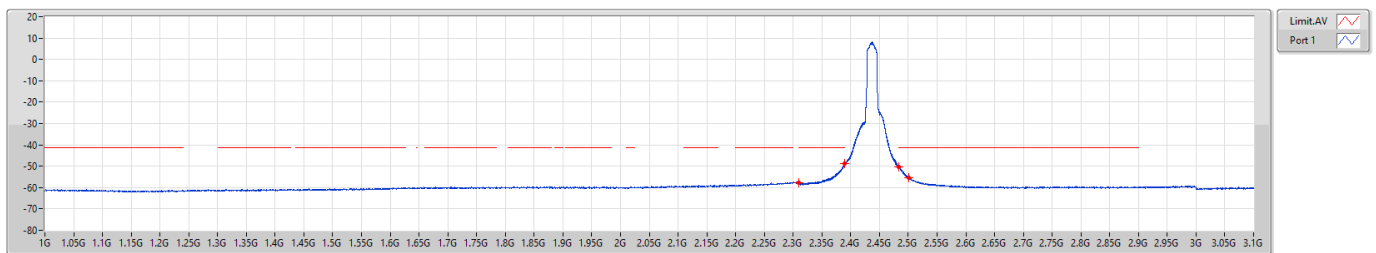


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-57.69	-57.69
2.31G	2.39G	1M	AV	2.38936G	-48.70	-48.70
2.4835G	2.5G	1M	AV	2.48357G	-50.17	-50.17
2.5G	3.1G	1M	AV	2.5009G	-55.36	-55.36



2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]

2447MHz

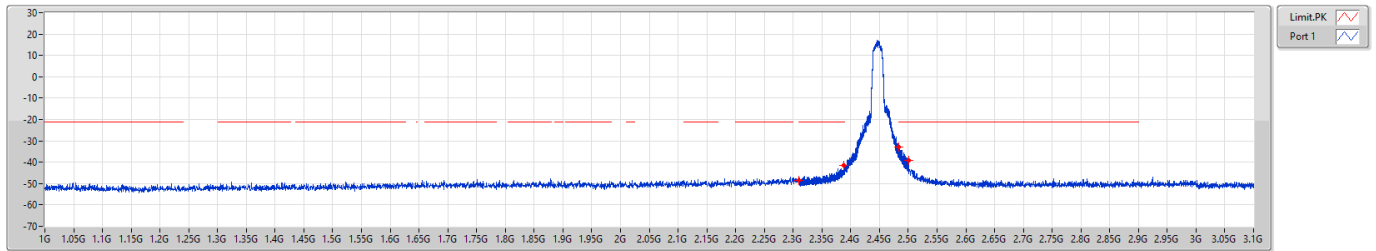


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-48.52	-48.52
2.31G	2.39G	1M	PK	2.3884G	-41.62	-41.62
2.4835G	2.5G	1M	PK	2.48354G	-33.04	-33.04
2.5G	3.1G	1M	PK	2.5012G	-38.98	-38.98

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2447MHz

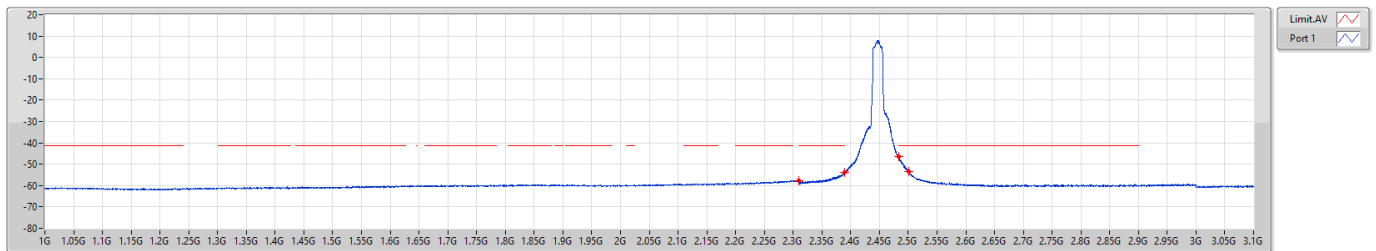


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-57.92	-57.92
2.31G	2.39G	1M	AV	2.38996G	-53.79	-53.79
2.4835G	2.5G	1M	AV	2.48365G	-46.48	-46.48
2.5G	3.1G	1M	AV	2.5009G	-53.56	-53.56

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]

2452MHz

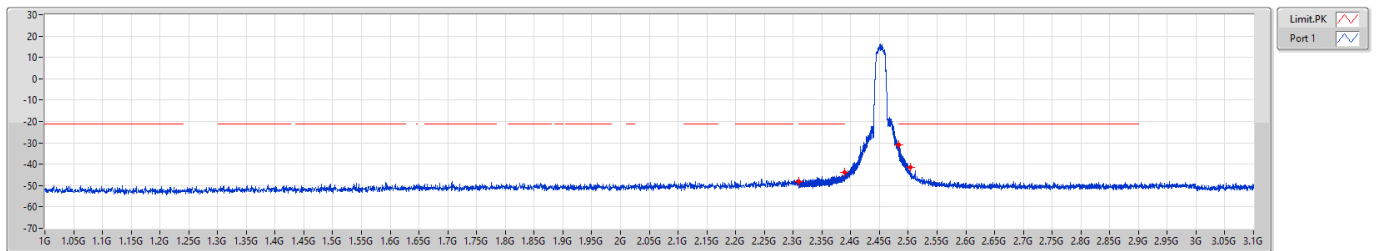


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-48.29	-48.29
2.31G	2.39G	1M	PK	2.38976G	-43.79	-43.79
2.4835G	2.5G	1M	PK	2.48351G	-30.93	-30.93
2.5G	3.1G	1M	PK	2.503G	-41.36	-41.36

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2452MHz

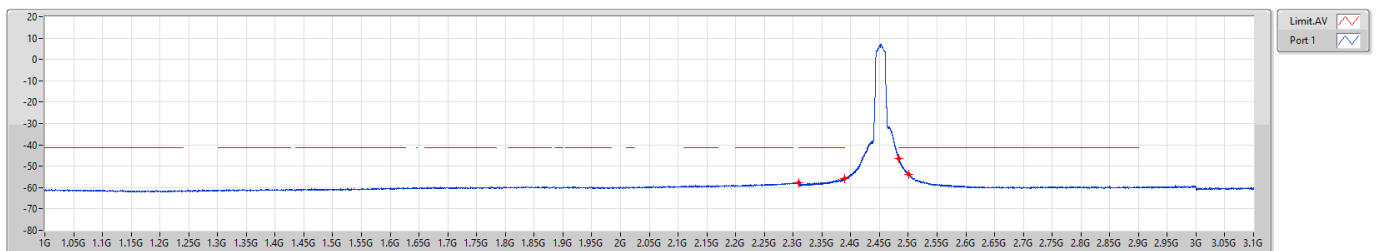


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-57.77	-57.77
2.31G	2.39G	1M	AV	2.3892G	-55.77	-55.77
2.4835G	2.5G	1M	AV	2.48357G	-46.50	-46.50
2.5G	3.1G	1M	AV	2.5003G	-53.75	-53.75

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]

2457MHz

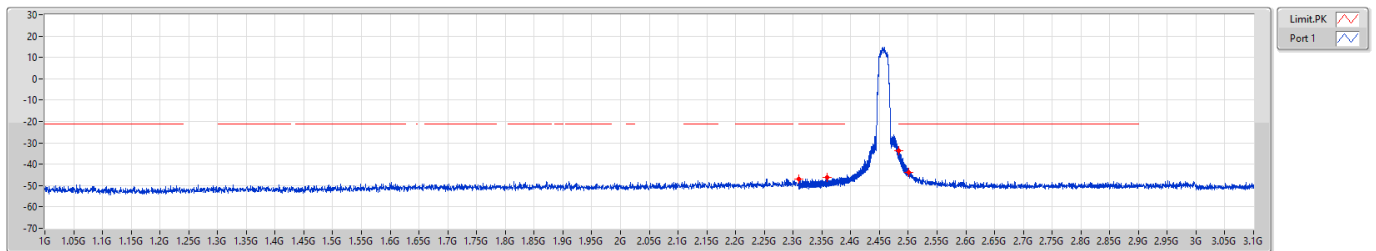


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-47.09	-47.09
2.31G	2.39G	1M	PK	2.35888G	-46.16	-46.16
2.4835G	2.5G	1M	PK	2.48408G	-33.86	-33.86
2.5G	3.1G	1M	PK	2.5015G	-43.95	-43.95

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2457MHz

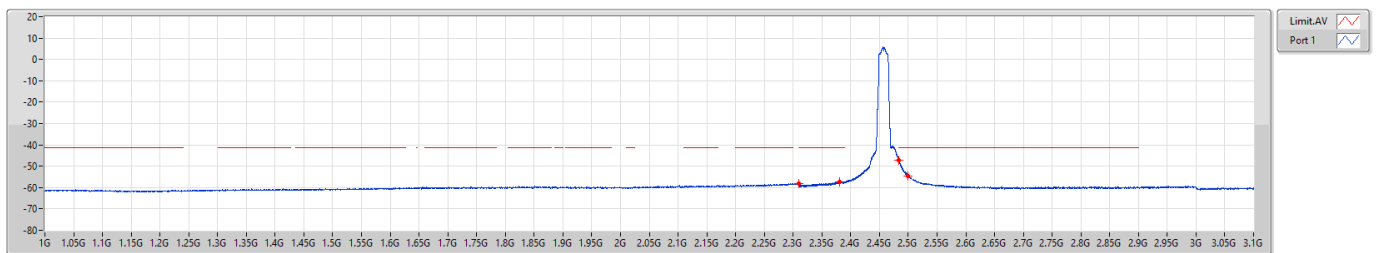


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-58.23	-58.23
2.31G	2.39G	1M	AV	2.38088G	-57.22	-57.22
2.4835G	2.5G	1M	AV	2.48356G	-47.03	-47.03
2.5G	3.1G	1M	AV	2.5G	-54.61	-54.61



2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [PK]

2462MHz

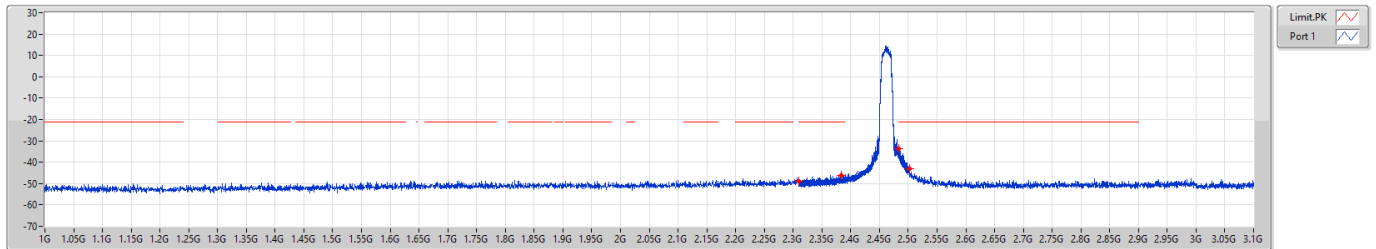


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-48.90	-48.90
2.31G	2.39G	1M	PK	2.38404G	-46.00	-46.00
2.4835G	2.5G	1M	PK	2.48359G	-33.83	-33.83
2.5G	3.1G	1M	PK	2.5018G	-42.93	-42.93

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE Bandedge [AV]

2462MHz

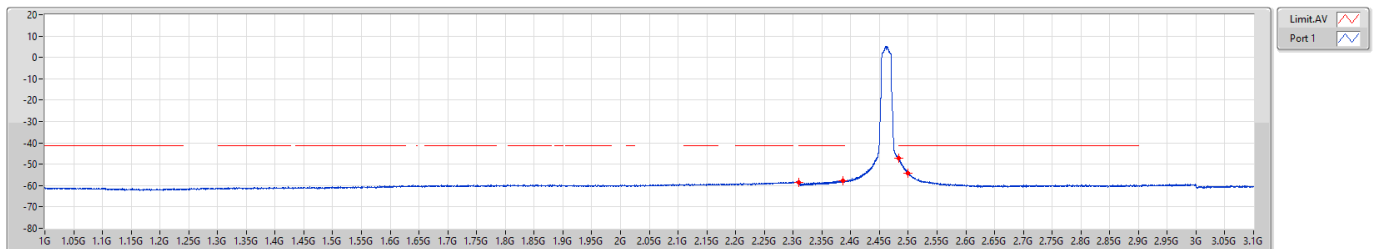


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-58.46	-58.46
2.31G	2.39G	1M	AV	2.38672G	-57.58	-57.58
2.4835G	2.5G	1M	AV	2.48362G	-47.05	-47.05
2.5G	3.1G	1M	AV	2.5G	-54.33	-54.33



2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


2412MHz

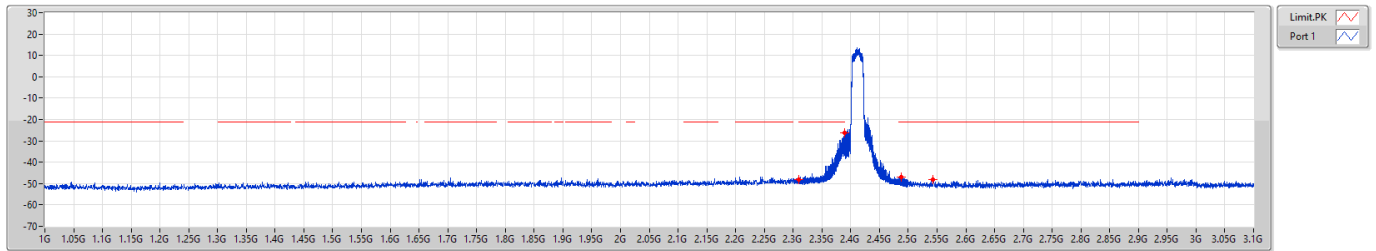

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2412MHz

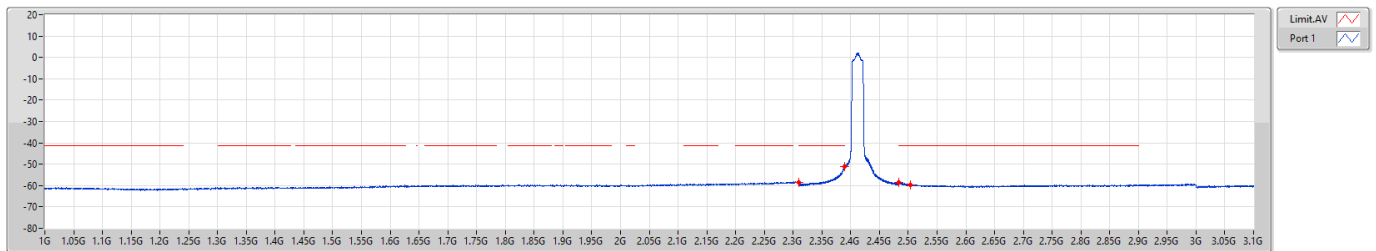




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


2417MHz

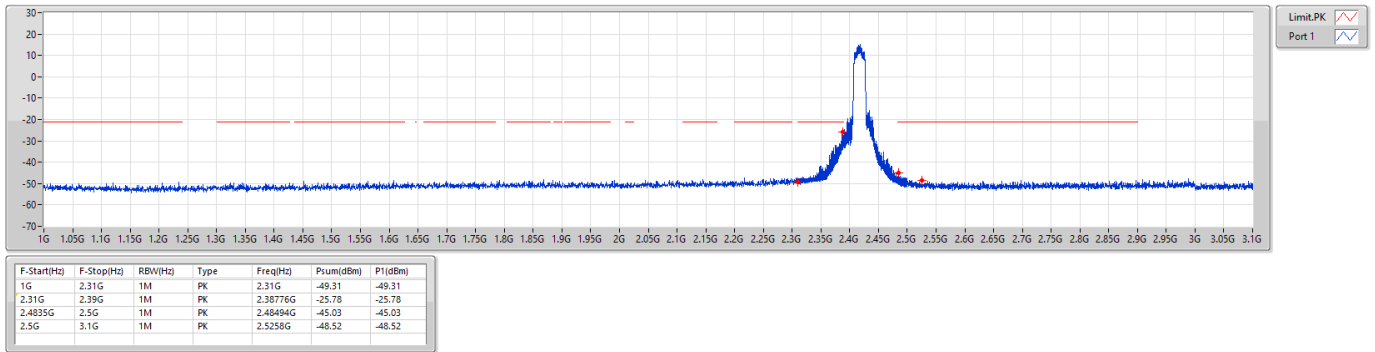

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2417MHz

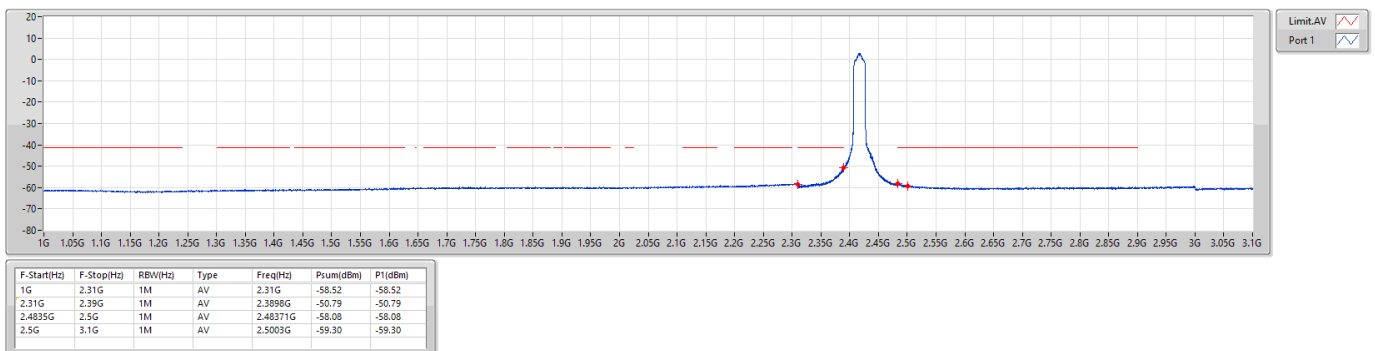




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

2422MHz

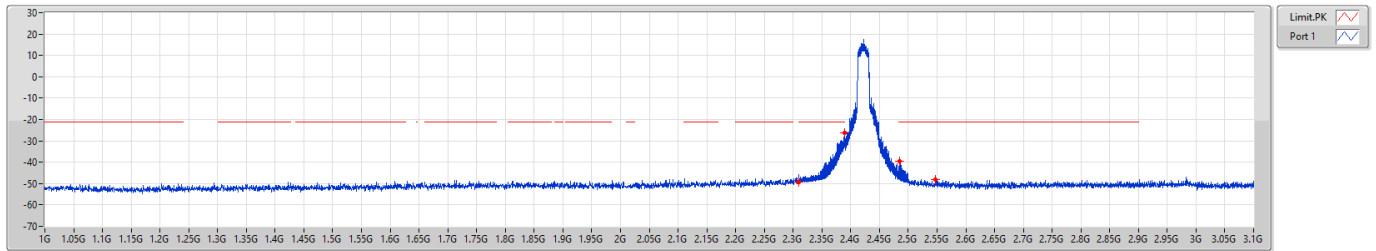


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-49.24	-49.24
2.31G	2.39G	1M	PK	2.38888G	-26.29	-26.29
2.4835G	2.5G	1M	PK	2.48449G	-39.70	-39.70
2.5G	3.1G	1M	PK	2.5465G	-48.16	-48.16

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2422MHz

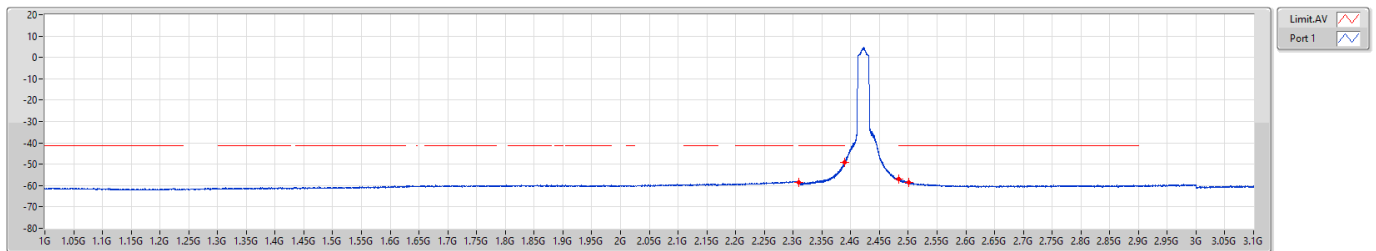


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-58.64	-58.64
2.31G	2.39G	1M	AV	2.38888G	-49.02	-49.02
2.4835G	2.5G	1M	AV	2.4835G	-56.98	-56.98
2.5G	3.1G	1M	AV	2.5003G	-58.70	-58.70



2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


2427MHz

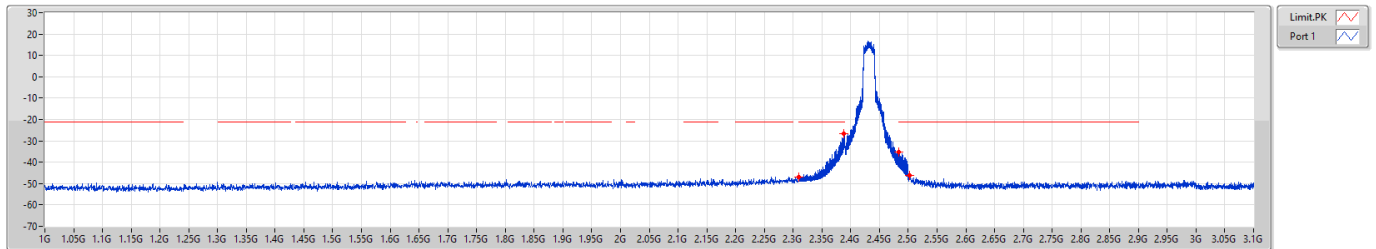

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2427MHz

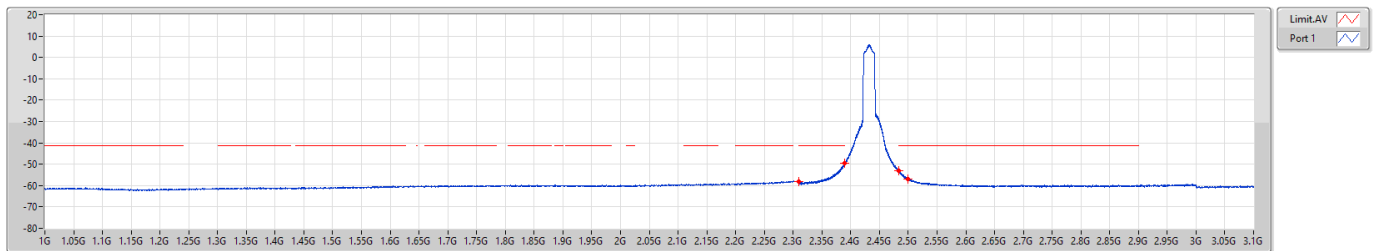




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

2437MHz

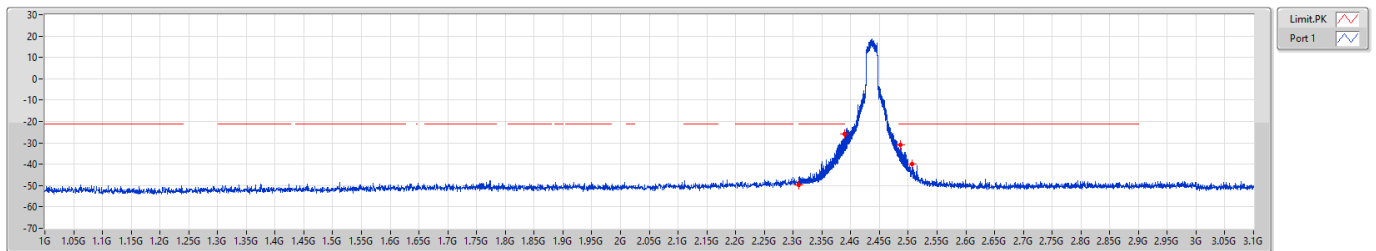


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-49.51	-49.51
2.31G	2.39G	1M	PK	2.38964G	-25.83	-25.83
2.4835G	2.5G	1M	PK	2.48626G	-30.89	-30.89
2.5G	3.1G	1M	PK	2.5069G	-40.09	-40.09

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2437MHz

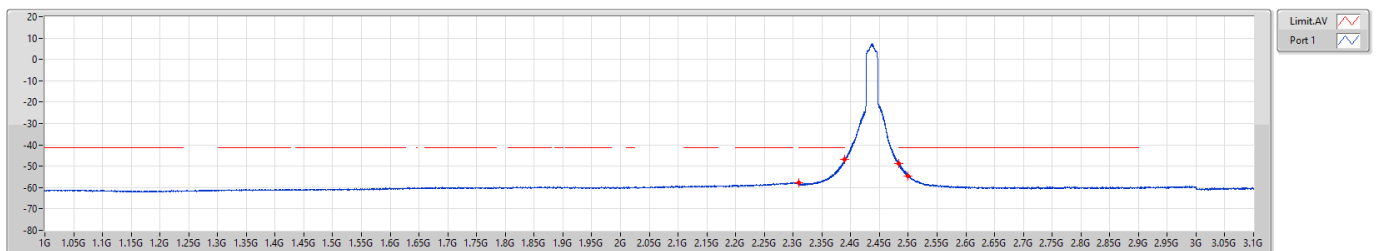


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-57.80	-57.80
2.31G	2.39G	1M	AV	2.38964G	-46.89	-46.89
2.4835G	2.5G	1M	AV	2.48352G	-48.81	-48.81
2.5G	3.1G	1M	AV	2.5G	-54.51	-54.51



2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


2447MHz

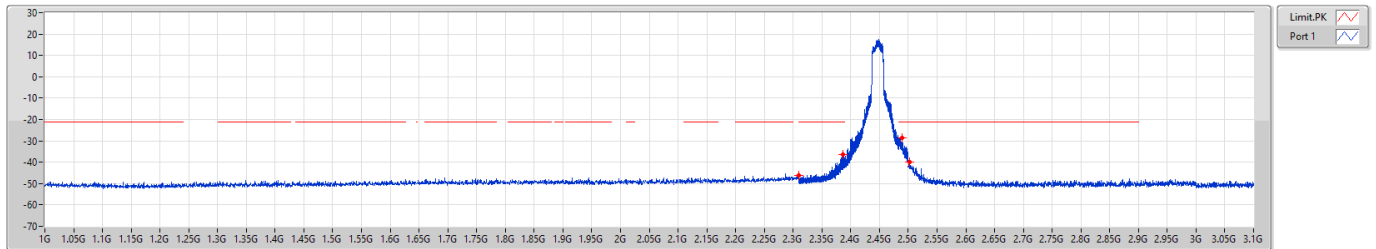

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2447MHz

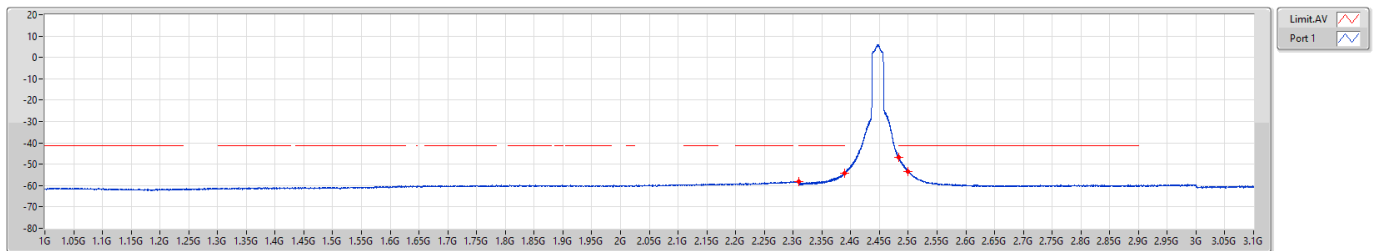




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

2452MHz

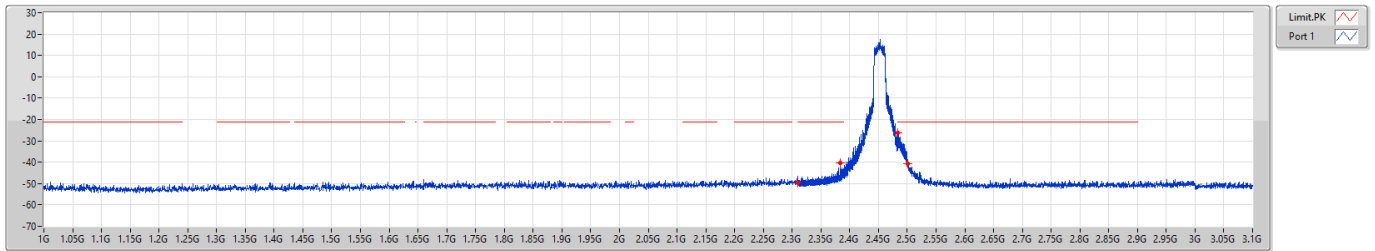


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	PK	2.31G	-49.61	-49.61
2.31G	2.39G	1M	PK	2.38404G	-40.33	-40.33
2.4835G	2.5G	1M	PK	2.48354G	-26.24	-26.24
2.5G	3.1G	1M	PK	2.5003G	-40.70	-40.70

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2452MHz

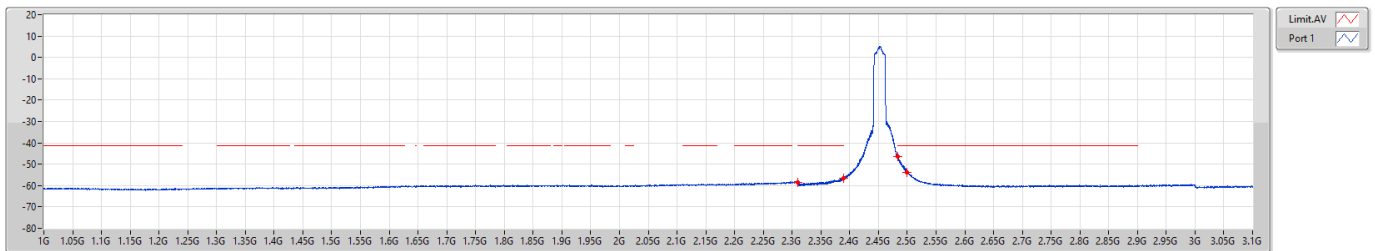


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	2.31G	1M	AV	2.31G	-58.40	-58.40
2.31G	2.39G	1M	AV	2.38912G	-56.45	-56.45
2.4835G	2.5G	1M	AV	2.48352G	-46.53	-46.53
2.5G	3.1G	1M	AV	2.5G	-53.78	-53.78



2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


2457MHz

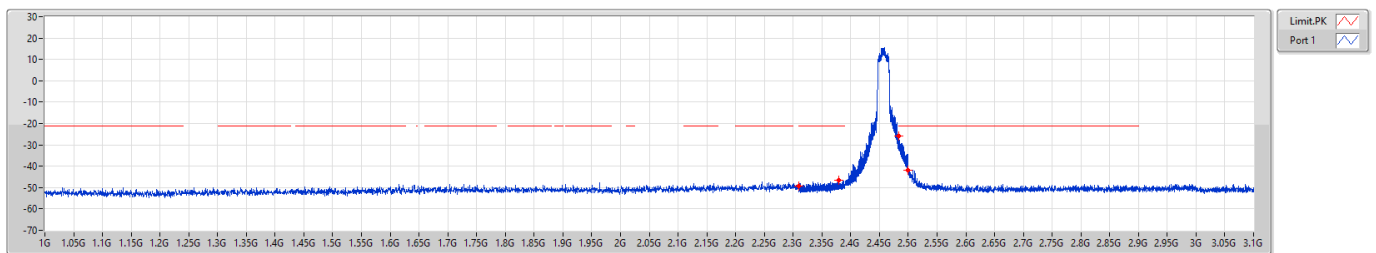

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2457MHz

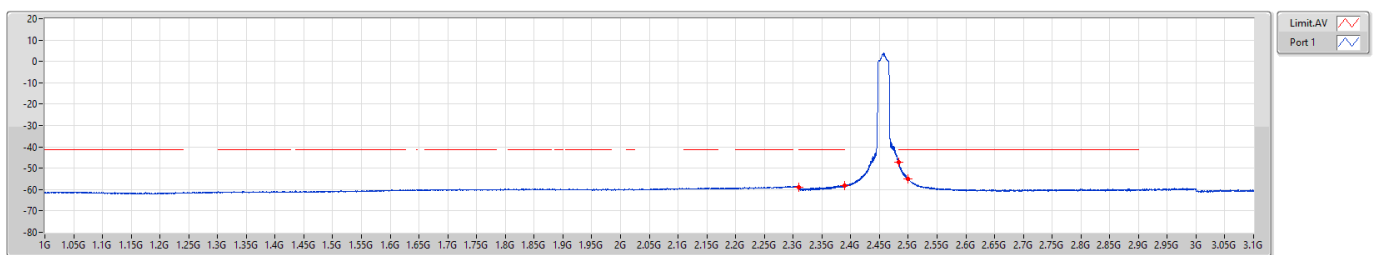




2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


2462MHz

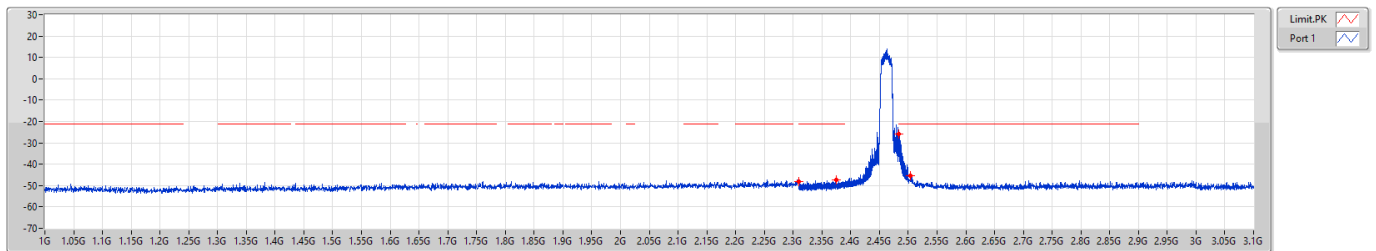

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

2462MHz

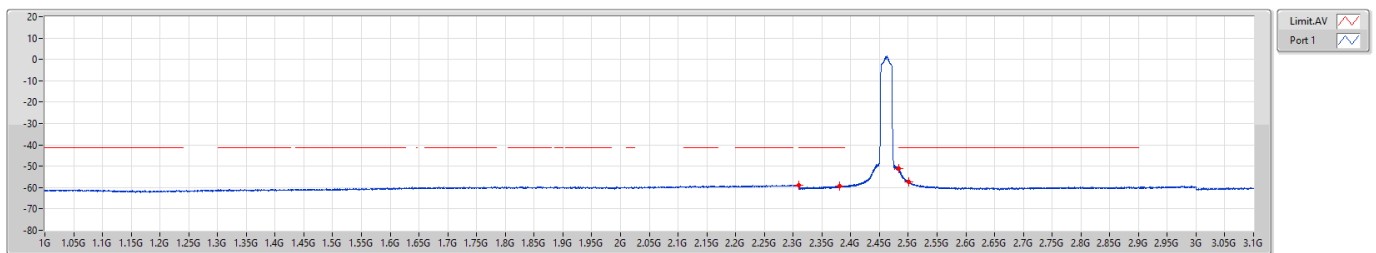

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	4G	5G	AV	4.824G	2.50	-44.82	-44.82	-42.32	-41.20	-1.12
802.11g_Nss1,(6Mbps)_1TX	Pass	4G	5G	AV	4.874G	2.50	-53.43	-53.43	-50.93	-41.20	-9.73
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	Pass	4G	5G	AV	4.8745G	2.50	-53.58	-53.58	-51.08	-41.20	-9.88

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.1G	4G	AV	3.61795G	2.50	-60.11	-60.11	-57.61	-41.20	-16.41
2412MHz	Pass	4G	5G	AV	4.824G	2.50	-44.82	-44.82	-42.32	-41.20	-1.12
2412MHz	Pass	5G	7G	AV	5.403G	2.50	-64.59	-64.59	-62.09	-41.20	-20.89
2412MHz	Pass	7G	8G	AV	7.474G	2.50	-63.90	-63.90	-61.40	-41.20	-20.20
2412MHz	Pass	8G	25G	AV	22.01863G	2.50	-54.20	-54.20	-51.70	-41.20	-10.50
2412MHz	Pass	3.1G	4G	PK	3.61795G	2.50	-52.79	-52.79	-50.29	-21.20	-29.09
2412MHz	Pass	4G	5G	PK	4.824G	2.50	-42.91	-42.91	-40.41	-21.20	-19.21
2412MHz	Pass	5G	7G	PK	5.3945G	2.50	-53.69	-53.69	-51.19	-21.20	-29.99
2412MHz	Pass	7G	8G	PK	7.4585G	2.50	-52.95	-52.95	-50.45	-21.20	-29.25
2412MHz	Pass	8G	25G	PK	22.20509G	2.50	-45.06	-45.06	-42.56	-21.20	-21.36
2437MHz	Pass	3.1G	4G	AV	3.6553G	2.50	-60.20	-60.20	-57.70	-41.20	-16.50
2437MHz	Pass	4G	5G	AV	4.874G	2.50	-44.91	-44.91	-42.41	-41.20	-1.21
2437MHz	Pass	5G	7G	AV	5.4095G	2.50	-64.43	-64.43	-61.93	-41.20	-20.73
2437MHz	Pass	7G	8G	AV	7.3095G	2.50	-59.19	-59.19	-56.69	-41.20	-15.49
2437MHz	Pass	8G	25G	AV	22.19341G	2.50	-54.14	-54.14	-51.64	-41.20	-10.44
2437MHz	Pass	3.1G	4G	PK	3.6553G	2.50	-53.77	-53.77	-51.27	-21.20	-30.07
2437MHz	Pass	4G	5G	PK	4.874G	2.50	-43.19	-43.19	-40.69	-21.20	-19.49
2437MHz	Pass	5G	7G	PK	5.456G	2.50	-54.01	-54.01	-51.51	-21.20	-30.31
2437MHz	Pass	7G	8G	PK	7.3095G	2.50	-51.59	-51.59	-49.09	-21.20	-27.89
2437MHz	Pass	8G	25G	PK	22.17534G	2.50	-43.51	-43.51	-41.01	-21.20	-19.81
2462MHz	Pass	3.1G	4G	AV	3.6931G	2.50	-60.49	-60.49	-57.99	-41.20	-16.79
2462MHz	Pass	4G	5G	AV	4.924G	2.50	-45.00	-45.00	-42.50	-41.20	-1.30
2462MHz	Pass	5G	7G	AV	5.4495G	2.50	-64.55	-64.55	-62.05	-41.20	-20.85
2462MHz	Pass	7G	8G	AV	7.3845G	2.50	-54.09	-54.09	-51.59	-41.20	-10.39
2462MHz	Pass	8G	25G	AV	22.13444G	2.50	-53.72	-53.72	-51.22	-41.20	-10.02
2462MHz	Pass	3.1G	4G	PK	3.6931G	2.50	-54.51	-54.51	-52.01	-21.20	-30.81
2462MHz	Pass	4G	5G	PK	4.924G	2.50	-43.06	-43.06	-40.56	-21.20	-19.36
2462MHz	Pass	5G	7G	PK	5.433G	2.50	-53.01	-53.01	-50.51	-21.20	-29.31
2462MHz	Pass	7G	8G	PK	7.3865G	2.50	-48.88	-48.88	-46.38	-21.20	-25.18
2462MHz	Pass	8G	25G	PK	22.15781G	2.50	-44.76	-44.76	-42.26	-21.20	-21.06
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.1G	4G	AV	3.9694G	2.50	-65.64	-65.64	-63.14	-41.20	-21.94
2412MHz	Pass	4G	5G	AV	4.825G	2.50	-54.77	-54.77	-52.27	-41.20	-11.07
2412MHz	Pass	5G	7G	AV	5.412G	2.50	-64.63	-64.63	-62.13	-41.20	-20.93
2412MHz	Pass	7G	8G	AV	7.25G	2.50	-63.73	-63.73	-61.23	-41.20	-20.03
2412MHz	Pass	8G	25G	AV	22.14241G	2.50	-54.03	-54.03	-51.53	-41.20	-10.33
2412MHz	Pass	3.1G	4G	PK	3.85285G	2.50	-54.72	-54.72	-52.22	-21.20	-31.02
2412MHz	Pass	4G	5G	PK	4.824G	2.50	-44.78	-44.78	-42.28	-21.20	-21.08
2412MHz	Pass	5G	7G	PK	5.4445G	2.50	-54.32	-54.32	-51.82	-21.20	-30.62
2412MHz	Pass	7G	8G	PK	7.4905G	2.50	-53.56	-53.56	-51.06	-21.20	-29.86
2412MHz	Pass	8G	25G	PK	22.17906G	2.50	-45.13	-45.13	-42.63	-21.20	-21.43
2437MHz	Pass	3.1G	4G	AV	3.65575G	2.50	-59.66	-59.66	-57.16	-41.20	-15.96
2437MHz	Pass	4G	5G	AV	4.874G	2.50	-53.43	-53.43	-50.93	-41.20	-9.73
2437MHz	Pass	5G	7G	AV	5.4205G	2.50	-64.42	-64.42	-61.92	-41.20	-20.72

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2437MHz	Pass	7G	8G	AV	7.312G	2.50	-56.19	-56.19	-53.69	-41.20	-12.49
2437MHz	Pass	8G	25G	AV	22.12647G	2.50	-54.23	-54.23	-51.73	-41.20	-10.53
2437MHz	Pass	3.1G	4G	PK	3.90505G	2.50	-54.30	-54.30	-51.80	-21.20	-30.60
2437MHz	Pass	4G	5G	PK	4.874G	2.50	-43.07	-43.07	-40.57	-21.20	-19.37
2437MHz	Pass	5G	7G	PK	5.397G	2.50	-53.23	-53.23	-50.73	-21.20	-29.53
2437MHz	Pass	7G	8G	PK	7.3115G	2.50	-43.81	-43.81	-41.31	-21.20	-20.11
2437MHz	Pass	8G	25G	PK	22.13338G	2.50	-45.19	-45.19	-42.69	-21.20	-21.49
2462MHz	Pass	3.1G	4G	AV	3.6931G	2.50	-59.86	-59.86	-57.36	-41.20	-16.16
2462MHz	Pass	4G	5G	AV	4.924G	2.50	-55.45	-55.45	-52.95	-41.20	-11.75
2462MHz	Pass	5G	7G	AV	5.4465G	2.50	-64.60	-64.60	-62.10	-41.20	-20.90
2462MHz	Pass	7G	8G	AV	7.489G	2.50	-63.59	-63.59	-61.09	-41.20	-19.89
2462MHz	Pass	8G	25G	AV	22.11425G	2.50	-54.35	-54.35	-51.85	-41.20	-10.65
2462MHz	Pass	3.1G	4G	PK	3.6931G	2.50	-54.07	-54.07	-51.57	-21.20	-30.37
2462MHz	Pass	4G	5G	PK	4.924G	2.50	-45.03	-45.03	-42.53	-21.20	-21.33
2462MHz	Pass	5G	7G	PK	5.3945G	2.50	-53.81	-53.81	-51.31	-21.20	-30.11
2462MHz	Pass	7G	8G	PK	7.4865G	2.50	-52.55	-52.55	-50.05	-21.20	-28.85
2462MHz	Pass	8G	25G	PK	22.12116G	2.50	-45.19	-45.19	-42.69	-21.20	-21.49
802.11ax HEW20_Nss1,(MCS0)_1TX-OFDMA	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.1G	4G	AV	3.61795G	2.50	-59.60	-59.60	-57.10	-41.20	-15.90
2412MHz	Pass	4G	5G	AV	4.824G	2.50	-56.82	-56.82	-54.32	-41.20	-13.12
2412MHz	Pass	5G	7G	AV	5.4165G	2.50	-64.42	-64.42	-61.92	-41.20	-20.72
2412MHz	Pass	7G	8G	AV	7.476G	2.50	-63.93	-63.93	-61.43	-41.20	-20.23
2412MHz	Pass	8G	25G	AV	22.10309G	2.50	-54.09	-54.09	-51.59	-41.20	-10.39
2412MHz	Pass	3.1G	4G	PK	3.8533G	2.50	-54.00	-54.00	-51.50	-21.20	-30.30
2412MHz	Pass	4G	5G	PK	4.824G	2.50	-48.48	-48.48	-45.98	-21.20	-24.78
2412MHz	Pass	5G	7G	PK	5.3805G	2.50	-54.41	-54.41	-51.91	-21.20	-30.71
2412MHz	Pass	7G	8G	PK	7.478G	2.50	-52.89	-52.89	-50.39	-21.20	-29.19
2412MHz	Pass	8G	25G	PK	22.18544G	2.50	-44.90	-44.90	-42.40	-21.20	-21.20
2437MHz	Pass	3.1G	4G	AV	3.65575G	2.50	-59.81	-59.81	-57.31	-41.20	-16.11
2437MHz	Pass	4G	5G	AV	4.8745G	2.50	-53.58	-53.58	-51.08	-41.20	-9.88
2437MHz	Pass	5G	7G	AV	5.431G	2.50	-64.55	-64.55	-62.05	-41.20	-20.85
2437MHz	Pass	7G	8G	AV	7.311G	2.50	-54.50	-54.50	-52.00	-41.20	-10.80
2437MHz	Pass	8G	25G	AV	22.14453G	2.50	-54.43	-54.43	-51.93	-41.20	-10.73
2437MHz	Pass	3.1G	4G	PK	3.65575G	2.50	-54.01	-54.01	-51.51	-21.20	-30.31
2437MHz	Pass	4G	5G	PK	4.8735G	2.50	-44.70	-44.70	-42.20	-21.20	-21.00
2437MHz	Pass	5G	7G	PK	5.417G	2.50	-53.54	-53.54	-51.04	-21.20	-29.84
2437MHz	Pass	7G	8G	PK	7.3135G	2.50	-41.27	-41.27	-38.77	-21.20	-17.57
2437MHz	Pass	8G	25G	PK	22.17428G	2.50	-45.04	-45.04	-42.54	-21.20	-21.34
2462MHz	Pass	3.1G	4G	AV	3.6931G	2.50	-60.00	-60.00	-57.50	-41.20	-16.30
2462MHz	Pass	4G	5G	AV	4.924G	2.50	-57.20	-57.20	-54.70	-41.20	-13.50
2462MHz	Pass	5G	7G	AV	5.4125G	2.50	-64.47	-64.47	-61.97	-41.20	-20.77
2462MHz	Pass	7G	8G	AV	7.451G	2.50	-63.43	-63.43	-60.93	-41.20	-19.73
2462MHz	Pass	8G	25G	AV	22.14931G	2.50	-53.95	-53.95	-51.45	-41.20	-10.25
2462MHz	Pass	3.1G	4G	PK	3.6931G	2.50	-54.28	-54.28	-51.78	-21.20	-30.58
2462MHz	Pass	4G	5G	PK	4.9245G	2.50	-49.02	-49.02	-46.52	-21.20	-25.32




Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2462MHz	Pass	5G	7G	PK	5.3815G	2.50	-53.75	-53.75	-51.25	-21.20	-30.05
2462MHz	Pass	7G	8G	PK	7.472G	2.50	-53.17	-53.17	-50.67	-21.20	-29.47
2462MHz	Pass	8G	25G	PK	22.14931G	2.50	-44.30	-44.30	-41.80	-21.20	-20.60

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE [PK]


2412MHz

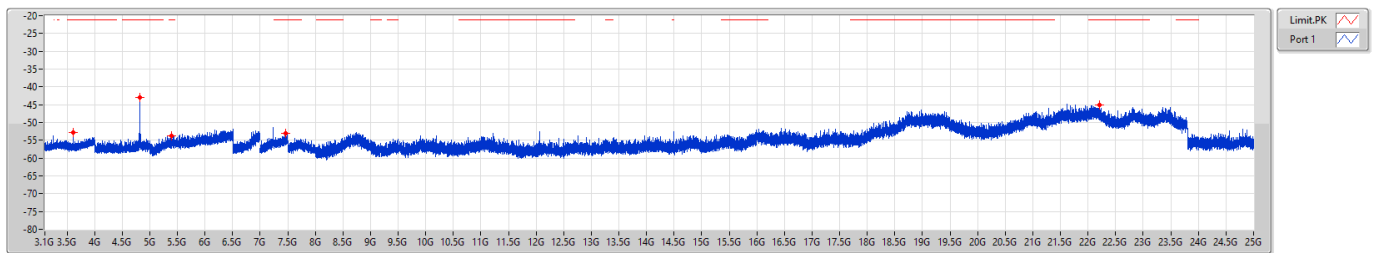

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE [AV]


2412MHz

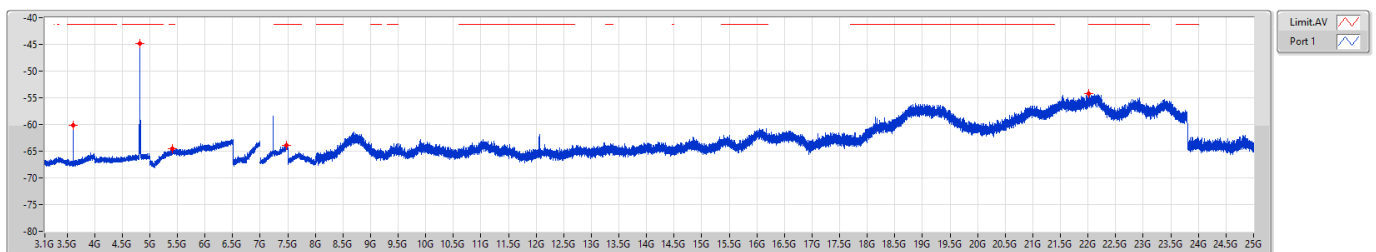

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE [PK]


2437MHz

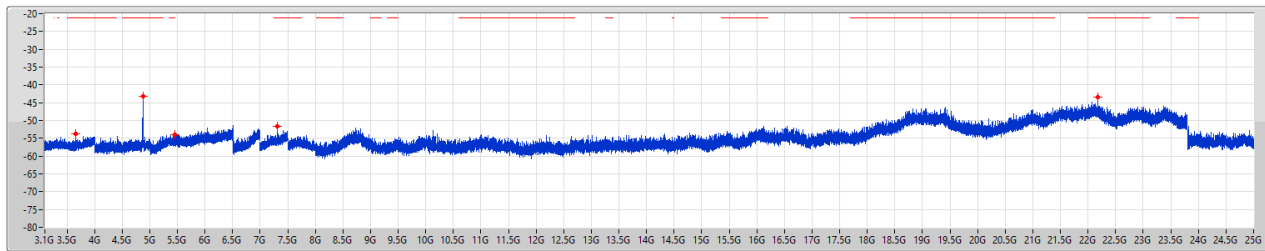

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE [AV]

2437MHz

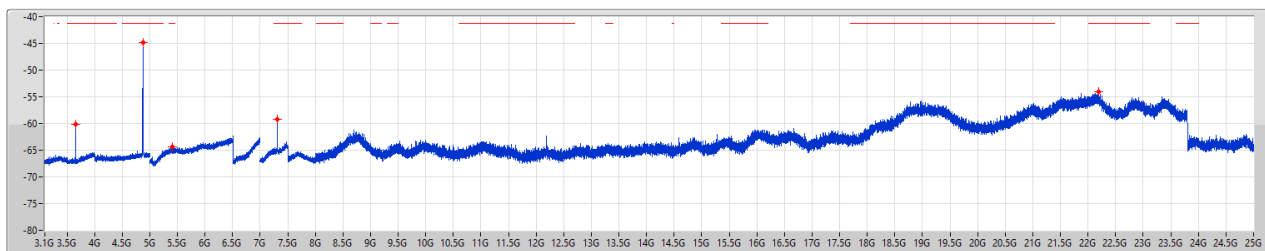




2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE [PK]

2462MHz

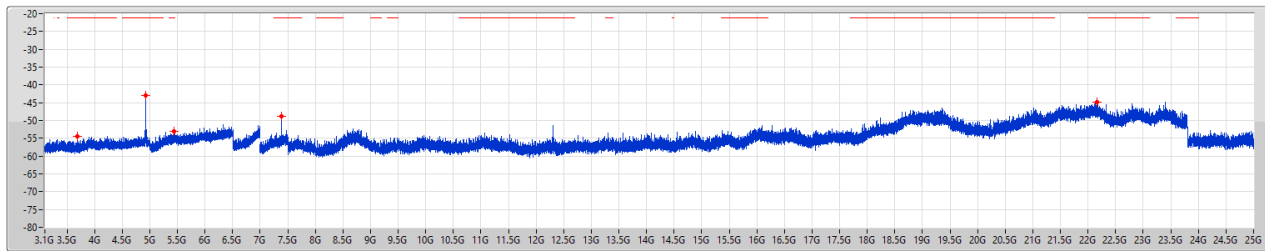


Limit PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	PK	3.6931G	-54.51	-54.51
4G	5G	1M	PK	4.924G	-43.06	-43.06
5G	7G	1M	PK	5.433G	-53.01	-53.01
7G	8G	1M	PK	7.3865G	-48.88	-48.88
8G	25G	1M	PK	22.15781G	-44.76	-44.76

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSE [AV]

2462MHz

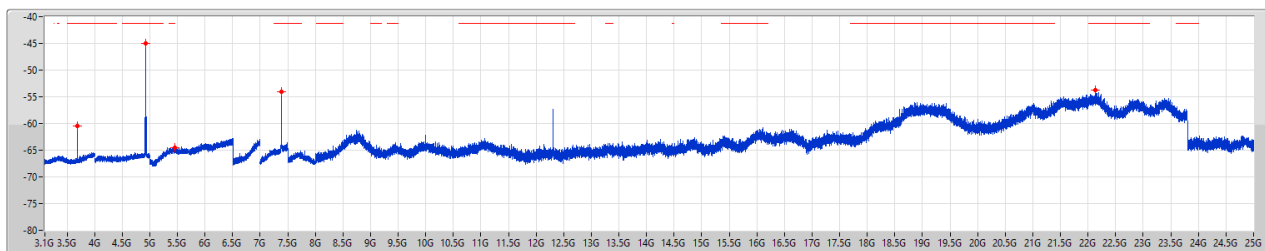

Limit AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	AV	3.6931G	-60.49	-60.49
4G	5G	1M	AV	4.924G	-45.00	-45.00
5G	7G	1M	AV	5.4495G	-64.55	-64.55
7G	8G	1M	AV	7.3845G	-54.09	-54.09
8G	25G	1M	AV	22.13444G	-53.72	-53.72



2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSE [PK]


2412MHz

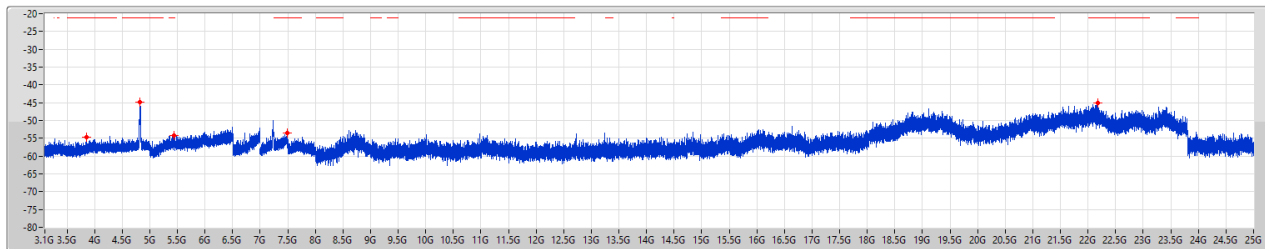

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSE [AV]

2412MHz

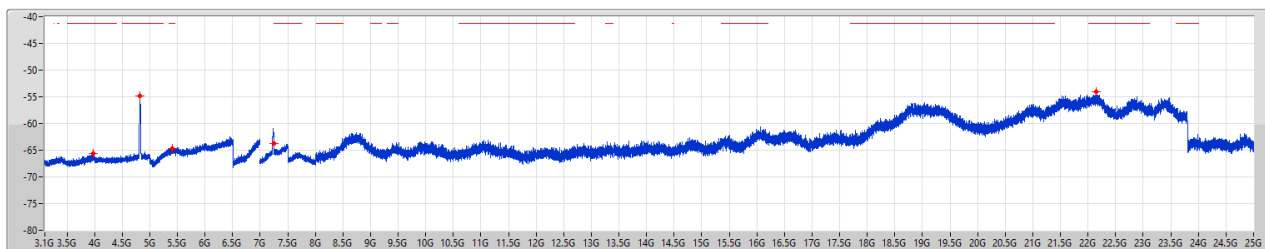




2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSE [PK]

2437MHz

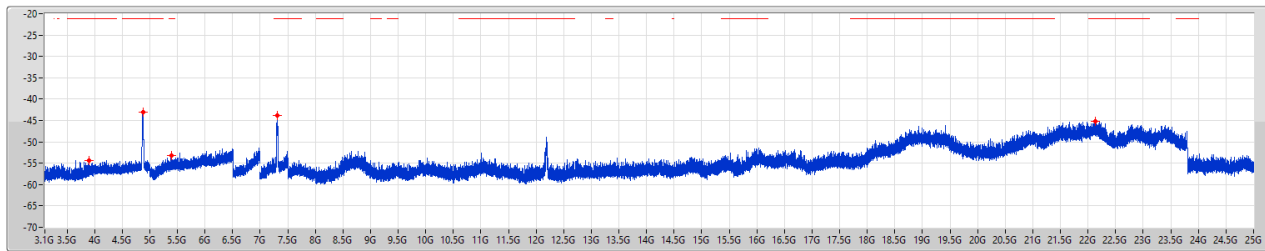


Limit,PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	PK	3.90505G	-54.30	-54.30
4G	5G	1M	PK	4.874G	-43.07	-43.07
5G	7G	1M	PK	5.397G	-53.23	-53.23
7G	8G	1M	PK	7.3115G	-43.81	-43.81
8G	25G	1M	PK	22.13338G	-45.19	-45.19

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSE [AV]

2437MHz

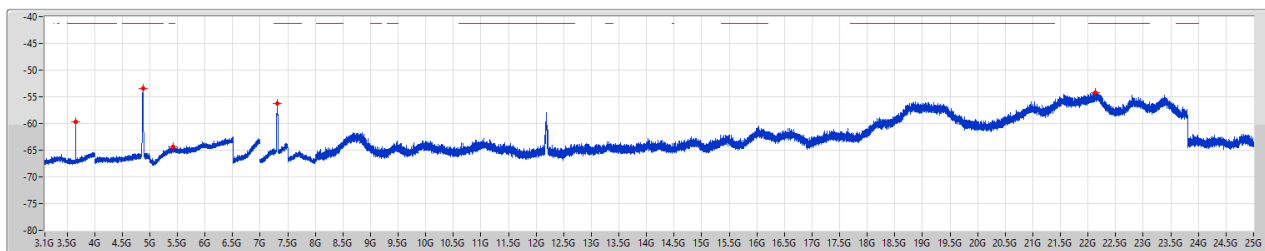

Limit,AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	AV	3.65575G	-59.66	-59.66
4G	5G	1M	AV	4.874G	-53.43	-53.43
5G	7G	1M	AV	5.4205G	-64.42	-64.42
7G	8G	1M	AV	7.312G	-56.19	-56.19
8G	25G	1M	AV	22.12647G	-54.23	-54.23



2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE [PK]

2462MHz

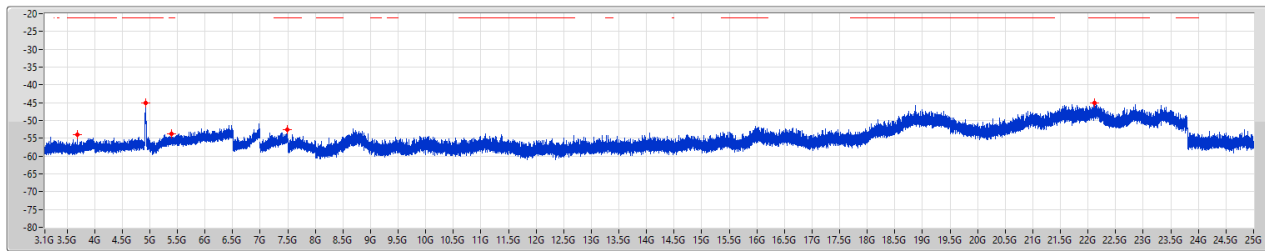


Limit PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	PK	3.6931G	-54.07	-54.07
4G	5G	1M	PK	4.924G	-45.03	-45.03
5G	7G	1M	PK	5.3945G	-53.81	-53.81
7G	8G	1M	PK	7.4865G	-52.55	-52.55
8G	25G	1M	PK	22.12116G	-45.19	-45.19

2.4-2.4835GHz_802.11g_Nss1_(6Mbps)_1TX

CSE [AV]

2462MHz

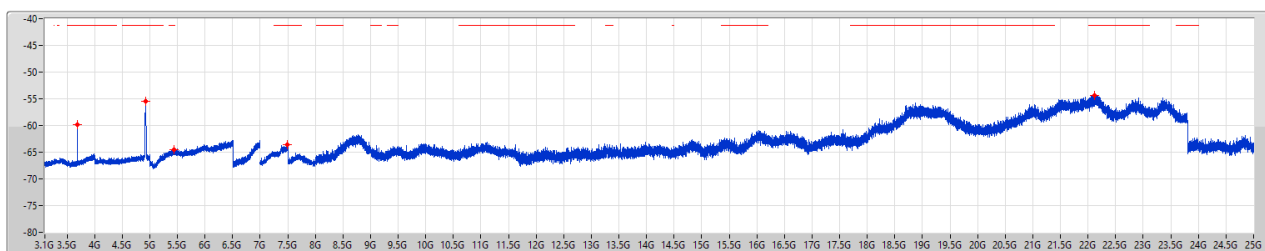


Limit AV
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	AV	3.6931G	-59.86	-59.86
4G	5G	1M	AV	4.924G	-55.45	-55.45
5G	7G	1M	AV	5.4465G	-64.60	-64.60
7G	8G	1M	AV	7.489G	-63.59	-63.59
8G	25G	1M	AV	22.11425G	-54.35	-54.35

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE [PK]

2412MHz

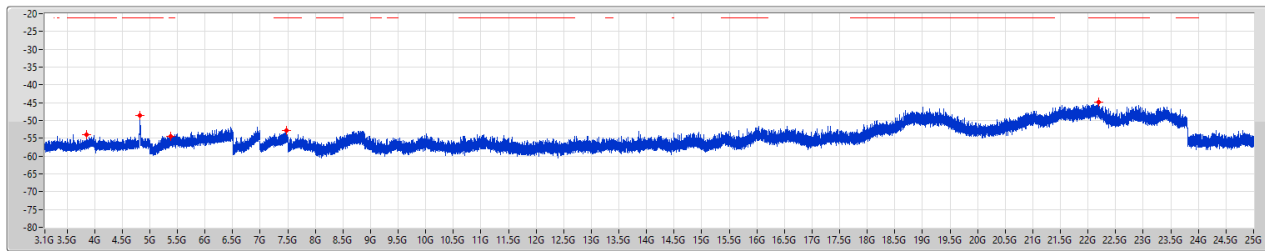


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	PK	3.8533G	-54.00	-54.00
4G	5G	1M	PK	4.824G	-48.48	-48.48
5G	7G	1M	PK	5.3805G	-54.41	-54.41
7G	8G	1M	PK	7.478G	-52.89	-52.89
8G	25G	1M	PK	22.18544G	-44.90	-44.90

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE [AV]

2412MHz

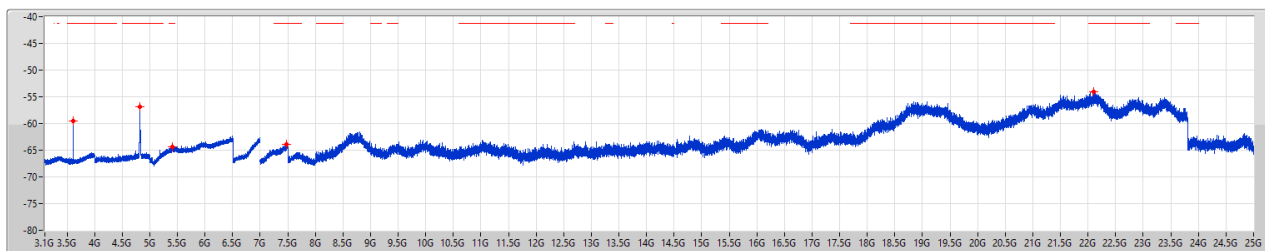


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	AV	3.61795G	-59.60	-59.60
4G	5G	1M	AV	4.824G	-56.82	-56.82
5G	7G	1M	AV	5.4165G	-64.42	-64.42
7G	8G	1M	AV	7.476G	-63.93	-63.93
8G	25G	1M	AV	22.10309G	-54.09	-54.09

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE [PK]

2437MHz

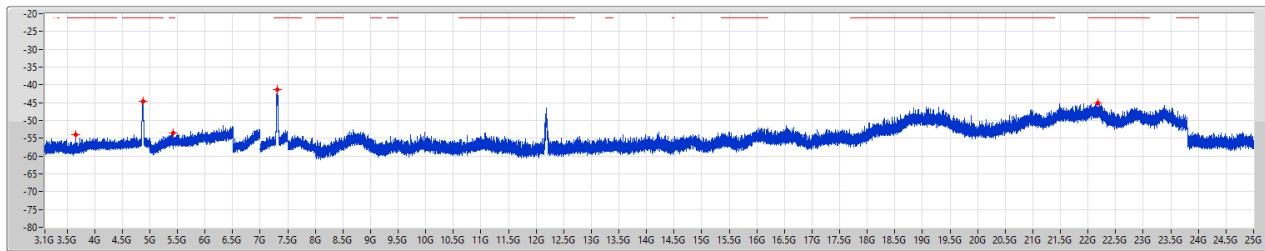


Limit PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	PK	3.65575G	-54.01	-54.01
4G	5G	1M	PK	4.8735G	-44.70	-44.70
5G	7G	1M	PK	5.417G	-53.54	-53.54
7G	8G	1M	PK	7.3135G	-41.27	-41.27
8G	25G	1M	PK	22.17428G	-45.04	-45.04

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE [AV]

2437MHz

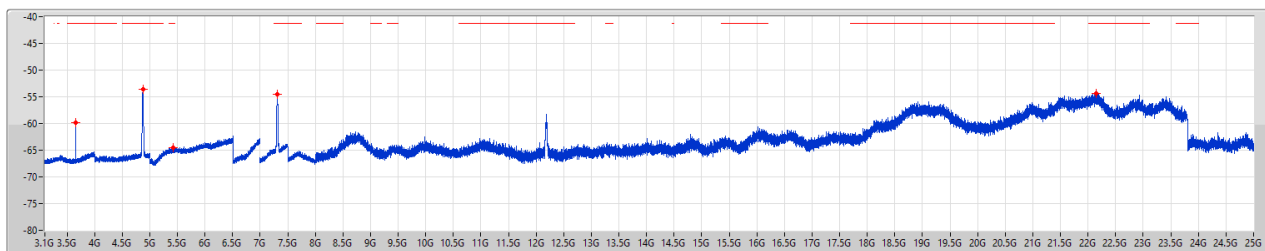

Limit AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
3.1G	4G	1M	AV	3.65575G	-59.81	-59.81
4G	5G	1M	AV	4.8745G	-53.58	-53.58
5G	7G	1M	AV	5.431G	-64.55	-64.55
7G	8G	1M	AV	7.311G	-54.50	-54.50
8G	25G	1M	AV	22.14453G	-54.43	-54.43



2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

CSE [PK]


2462MHz

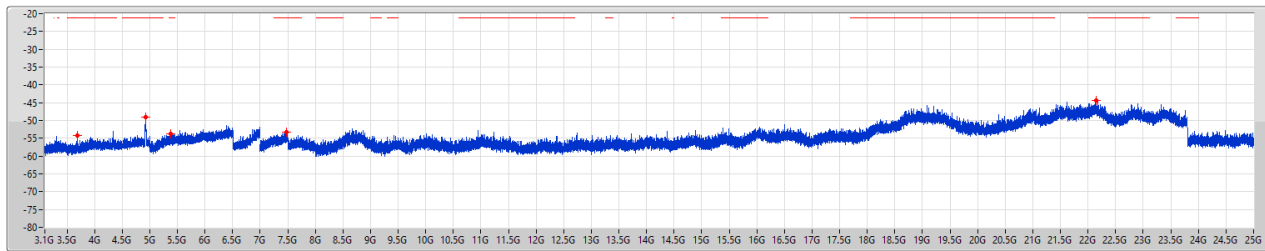

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


CSE [AV]

2462MHz

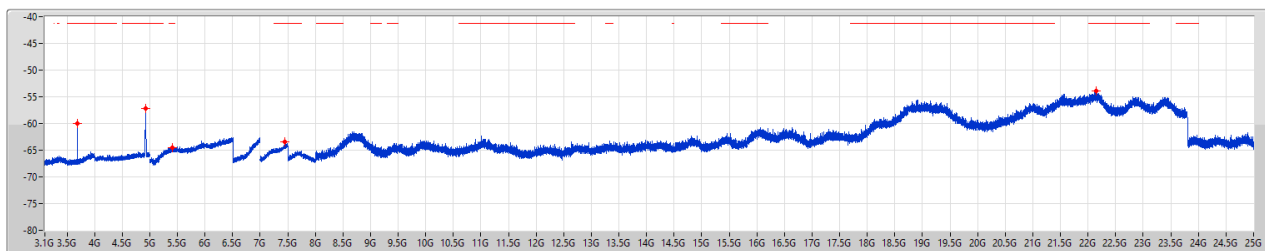




Unwanted Emissions (Below 1GHz)

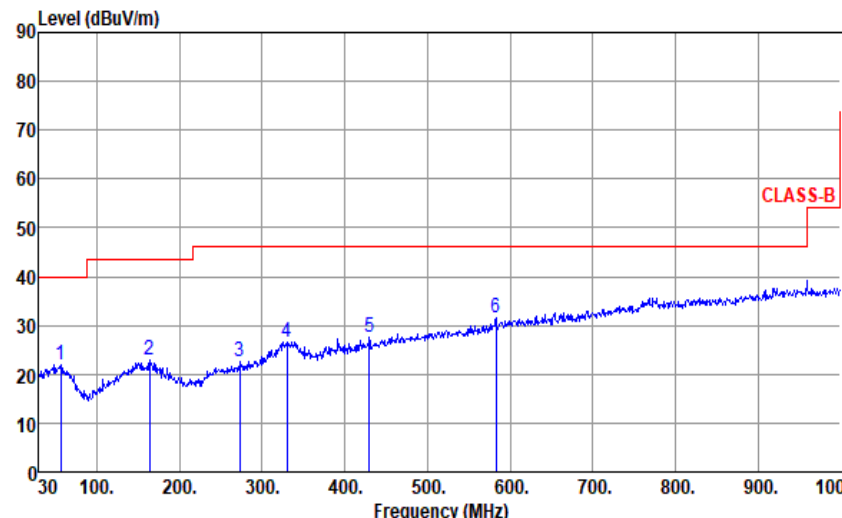Modulation	11g		Test Freq. (MHz)		2437																																																																							
Polarization	Horizontal																																																																											
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																																												
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>56.19</td><td>21.92</td><td>40.00</td><td>-18.08</td><td>30.48</td><td>-8.56</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>163.86</td><td>22.77</td><td>43.50</td><td>-20.73</td><td>31.49</td><td>-8.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>272.50</td><td>22.59</td><td>46.00</td><td>-23.41</td><td>31.18</td><td>-8.59</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>329.73</td><td>26.64</td><td>46.00</td><td>-19.36</td><td>33.24</td><td>-6.60</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>429.64</td><td>27.48</td><td>46.00</td><td>-18.52</td><td>31.31</td><td>-3.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>582.90</td><td>31.44</td><td>46.00</td><td>-14.56</td><td>31.66</td><td>-0.22</td><td>Peak</td><td>---</td><td>---</td></tr></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	56.19	21.92	40.00	-18.08	30.48	-8.56	Peak	---	---	2	163.86	22.77	43.50	-20.73	31.49	-8.72	Peak	---	---	3	272.50	22.59	46.00	-23.41	31.18	-8.59	Peak	---	---	4	329.73	26.64	46.00	-19.36	33.24	-6.60	Peak	---	---	5	429.64	27.48	46.00	-18.52	31.31	-3.83	Peak	---	---	6	582.90	31.44	46.00	-14.56	31.66	-0.22	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	56.19	21.92	40.00	-18.08	30.48	-8.56	Peak	---	---																																																																			
2	163.86	22.77	43.50	-20.73	31.49	-8.72	Peak	---	---																																																																			
3	272.50	22.59	46.00	-23.41	31.18	-8.59	Peak	---	---																																																																			
4	329.73	26.64	46.00	-19.36	33.24	-6.60	Peak	---	---																																																																			
5	429.64	27.48	46.00	-18.52	31.31	-3.83	Peak	---	---																																																																			
6	582.90	31.44	46.00	-14.56	31.66	-0.22	Peak	---	---																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																												

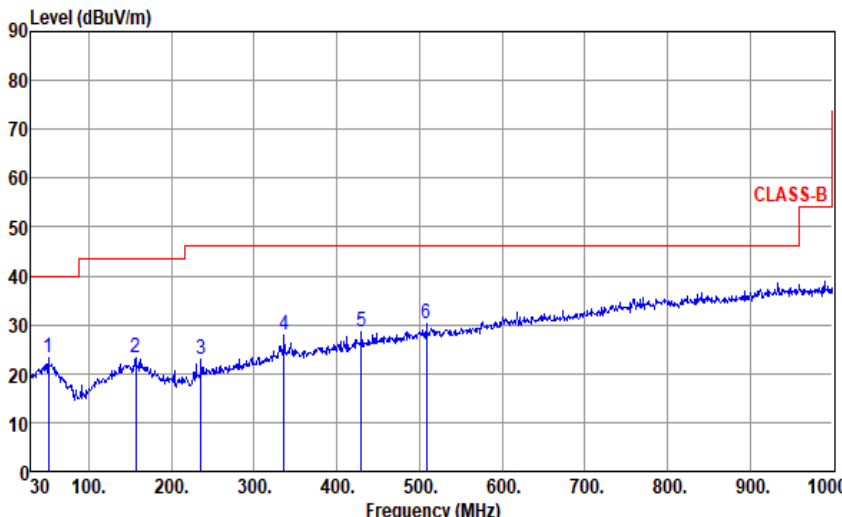

Modulation	11g		Test Freq. (MHz)		2437																																																																																
Polarization	Vertical																																																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>51.34</td><td>23.10</td><td>40.00</td><td>-16.90</td><td>31.49</td><td>-8.39</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>157.07</td><td>23.29</td><td>43.50</td><td>-20.21</td><td>31.74</td><td>-8.45</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>235.64</td><td>22.90</td><td>46.00</td><td>-23.10</td><td>33.09</td><td>-10.19</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>336.52</td><td>27.81</td><td>46.00</td><td>-18.19</td><td>34.33</td><td>-6.52</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>429.64</td><td>28.54</td><td>46.00</td><td>-17.46</td><td>32.37</td><td>-3.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>508.21</td><td>30.16</td><td>46.00</td><td>-15.84</td><td>32.00</td><td>-1.84</td><td>Peak</td><td>---</td><td>---</td></tr></table>							Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table	1	51.34	23.10	40.00	-16.90	31.49	-8.39	Peak	---	---	2	157.07	23.29	43.50	-20.21	31.74	-8.45	Peak	---	---	3	235.64	22.90	46.00	-23.10	33.09	-10.19	Peak	---	---	4	336.52	27.81	46.00	-18.19	34.33	-6.52	Peak	---	---	5	429.64	28.54	46.00	-17.46	32.37	-3.83	Peak	---	---	6	508.21	30.16	46.00	-15.84	32.00	-1.84	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																												
1	51.34	23.10	40.00	-16.90	31.49	-8.39	Peak	---	---																																																																												
2	157.07	23.29	43.50	-20.21	31.74	-8.45	Peak	---	---																																																																												
3	235.64	22.90	46.00	-23.10	33.09	-10.19	Peak	---	---																																																																												
4	336.52	27.81	46.00	-18.19	34.33	-6.52	Peak	---	---																																																																												
5	429.64	28.54	46.00	-17.46	32.37	-3.83	Peak	---	---																																																																												
6	508.21	30.16	46.00	-15.84	32.00	-1.84	Peak	---	---																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																					



Unwanted Emissions (Above 1GHz)

Modulation	11b	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) <			



Modulation	11b	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) <			



Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			




Modulation	11b	Test Freq. (MHz)	2462																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.13</td><td>74.00</td><td>-29.87</td><td>43.98</td><td>0.15</td><td>Peak</td><td>107</td><td>110</td></tr><tr><td>2</td><td>7386.00</td><td>46.30</td><td>74.00</td><td>-27.70</td><td>40.19</td><td>6.11</td><td>Peak</td><td>100</td><td>341</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4924.00	44.13	74.00	-29.87	43.98	0.15	Peak	107	110	2	7386.00	46.30	74.00	-27.70	40.19	6.11	Peak	100	341
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	4924.00	44.13	74.00	-29.87	43.98	0.15	Peak	107	110																								
2	7386.00	46.30	74.00	-27.70	40.19	6.11	Peak	100	341																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Modulation	11b	Test Freq. (MHz)	2462																																								
Polarization	Horizontal-Average																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>37.00</td><td>54.00</td><td>-17.00</td><td>36.85</td><td>0.15</td><td>Average</td><td>107</td><td>110</td></tr><tr><td>2</td><td>7386.00</td><td>33.72</td><td>54.00</td><td>-20.28</td><td>27.61</td><td>6.11</td><td>Average</td><td>100</td><td>341</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg	1	4924.00	37.00	54.00	-17.00	36.85	0.15	Average	107	110	2	7386.00	33.72	54.00	-20.28	27.61	6.11	Average	100	341
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg																																		
1	4924.00	37.00	54.00	-17.00	36.85	0.15	Average	107	110																																		
2	7386.00	33.72	54.00	-20.28	27.61	6.11	Average	100	341																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											

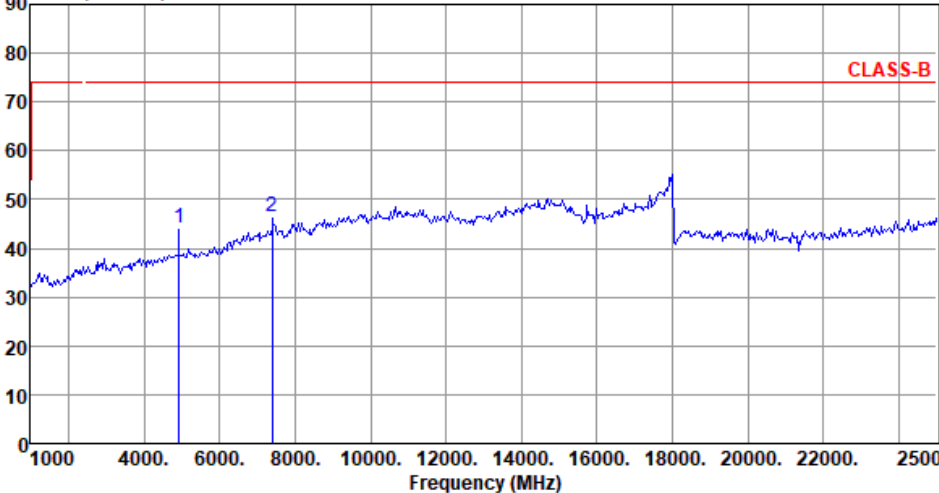

Modulation	11b	Test Freq. (MHz)	2462																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>44.17</td><td>74.00</td><td>-29.83</td><td>44.02</td><td>0.15</td><td>Peak</td><td>192</td><td>86</td></tr><tr><td>2</td><td>7386.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>40.45</td><td>6.11</td><td>Peak</td><td>100</td><td>110</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4924.00	44.17	74.00	-29.83	44.02	0.15	Peak	192	86	2	7386.00	46.56	74.00	-27.44	40.45	6.11	Peak	100	110
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	4924.00	44.17	74.00	-29.83	44.02	0.15	Peak	192	86																								
2	7386.00	46.56	74.00	-27.44	40.45	6.11	Peak	100	110																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Modulation	11b	Test Freq. (MHz)	2462																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4924.00</td><td>37.99</td><td>54.00</td><td>-16.01</td><td>37.84</td><td>0.15</td><td>Average</td><td>192</td><td>86</td></tr><tr><td>2</td><td>7386.00</td><td>33.73</td><td>54.00</td><td>-20.27</td><td>27.62</td><td>6.11</td><td>Average</td><td>100</td><td>110</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4924.00	37.99	54.00	-16.01	37.84	0.15	Average	192	86	2	7386.00	33.73	54.00	-20.27	27.62	6.11	Average	100	110
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	4924.00	37.99	54.00	-16.01	37.84	0.15	Average	192	86																								
2	7386.00	33.73	54.00	-20.27	27.62	6.11	Average	100	110																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Modulation	11g	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			



Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) <			



Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) <			



Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) <			



Modulation	11g	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) </			



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) <			



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) </			



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			




Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB

2412MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

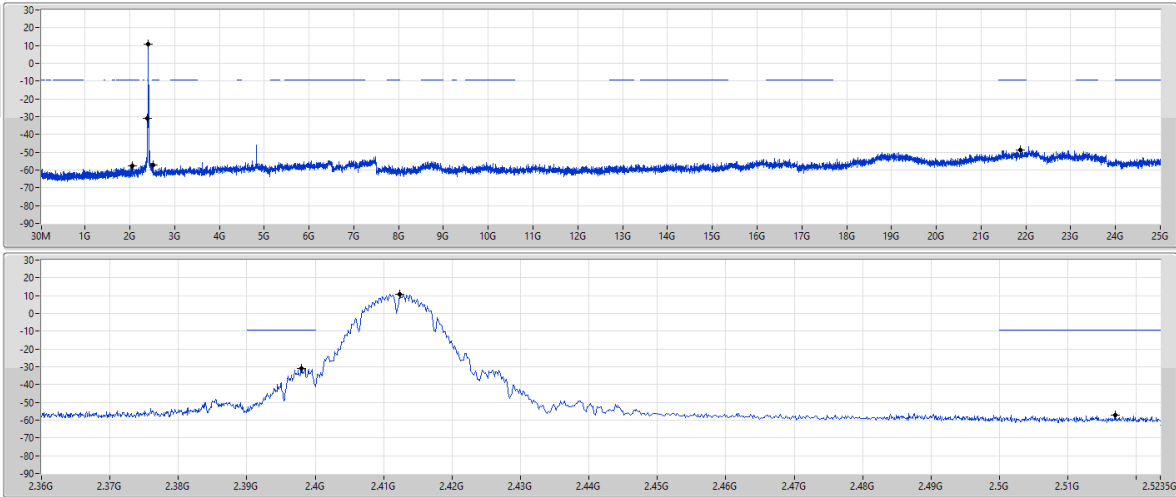


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41236G	10.84	-9.16	2.06293G	-57.48	2.398G	-30.93	2.51694G	-57.34	2.187015G	-48.83	1

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB

2437MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

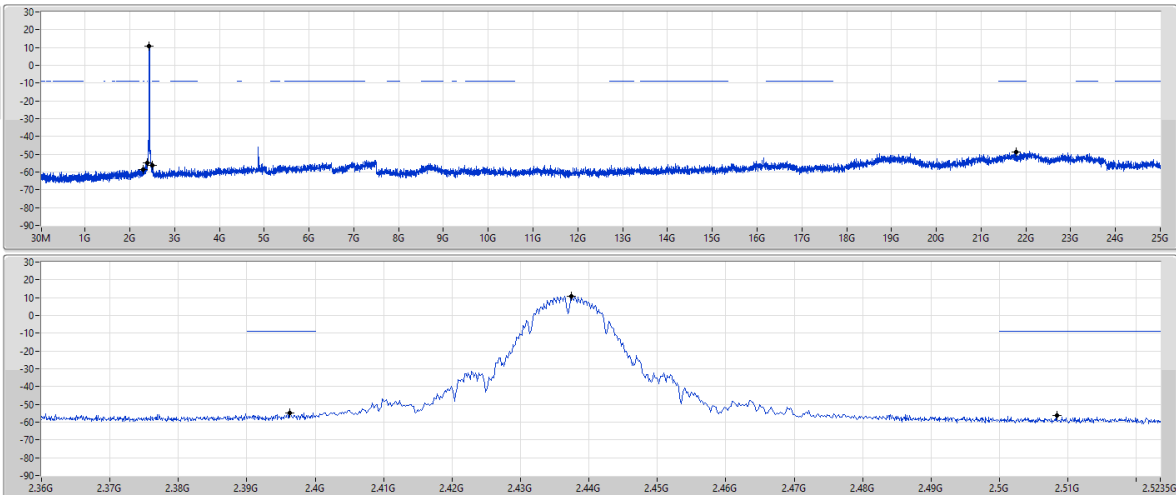


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	10.92	-9.08	2.30408G	-58.51	2.39624G	-54.64	2.50838G	-56.42	2.177743G	-48.72	1



2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB


2462MHz

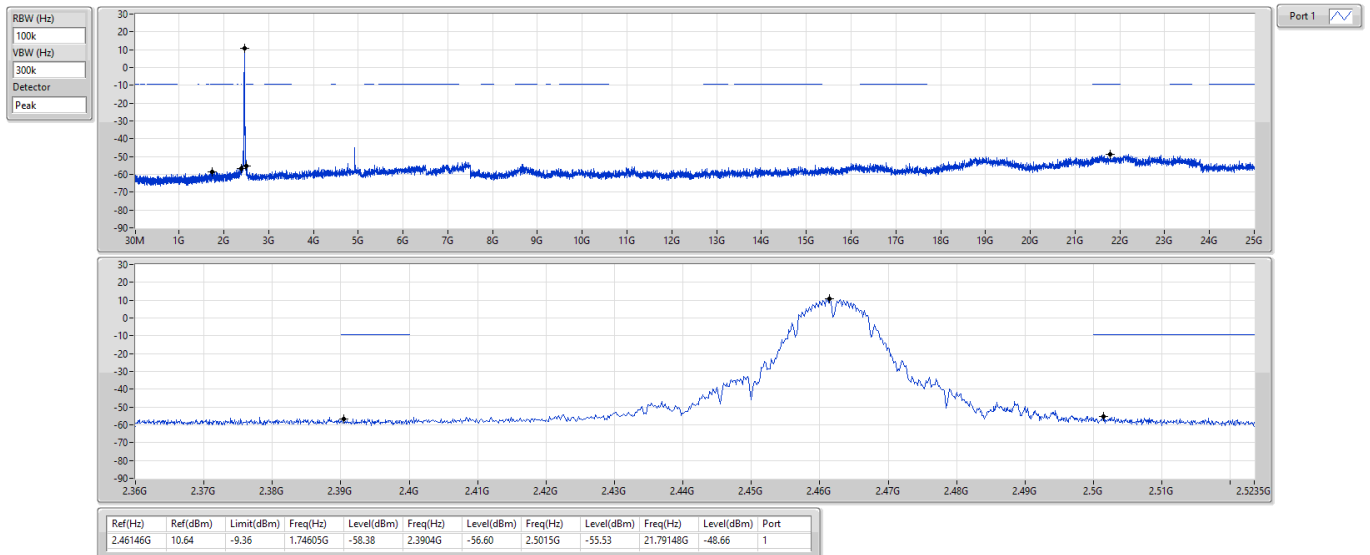

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB

2412MHz

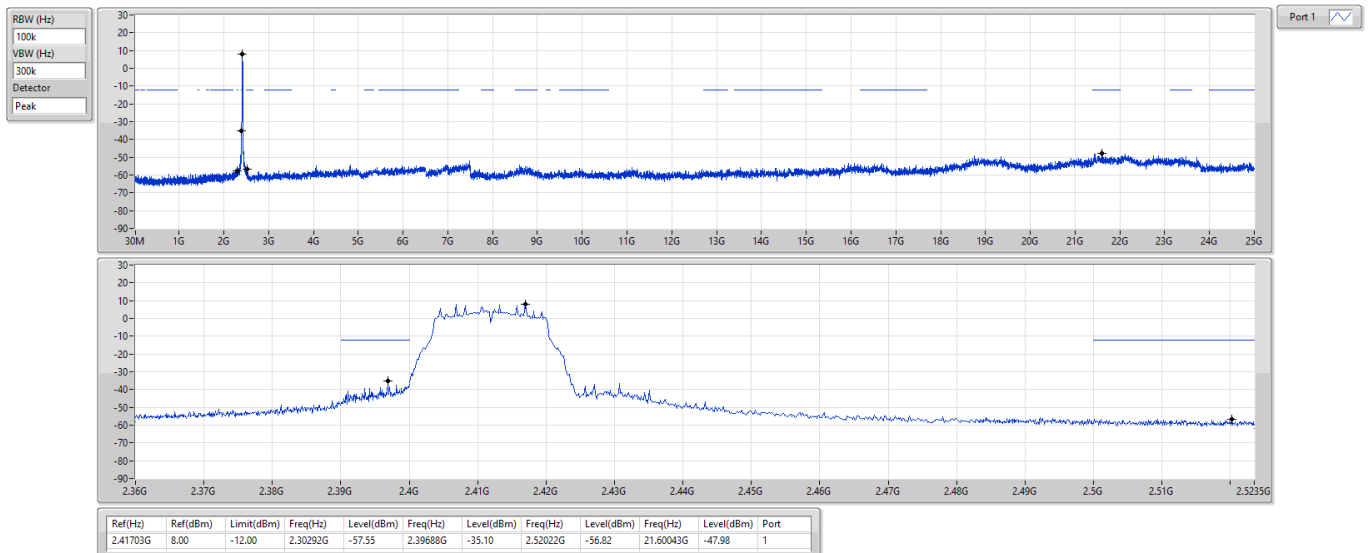




2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB


2437MHz

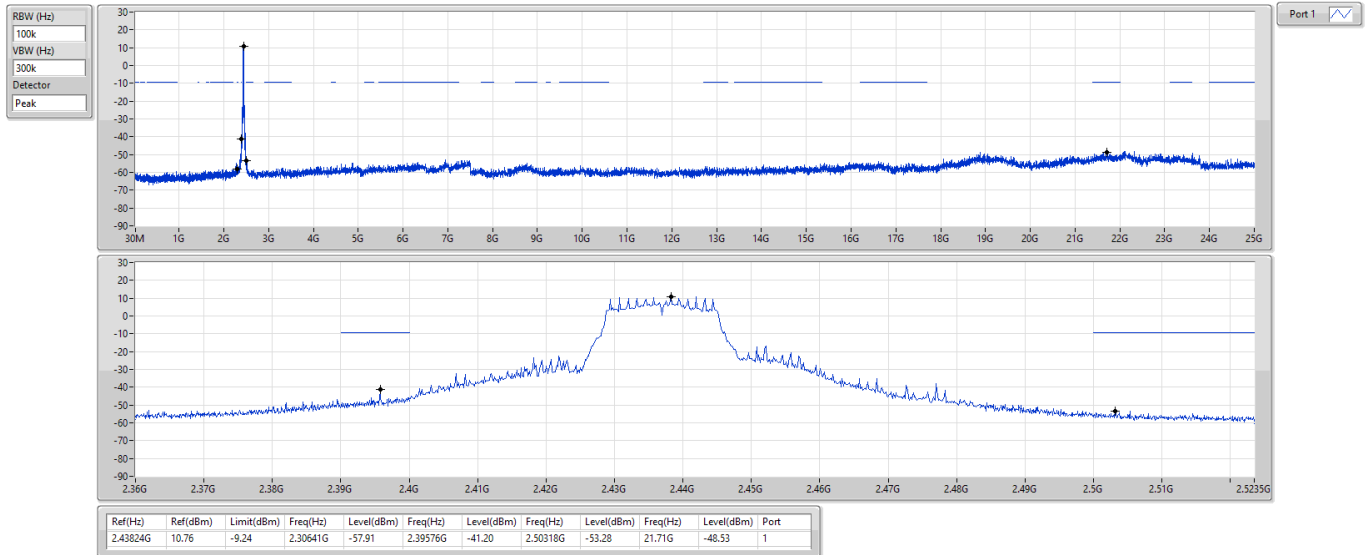

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB

2462MHz

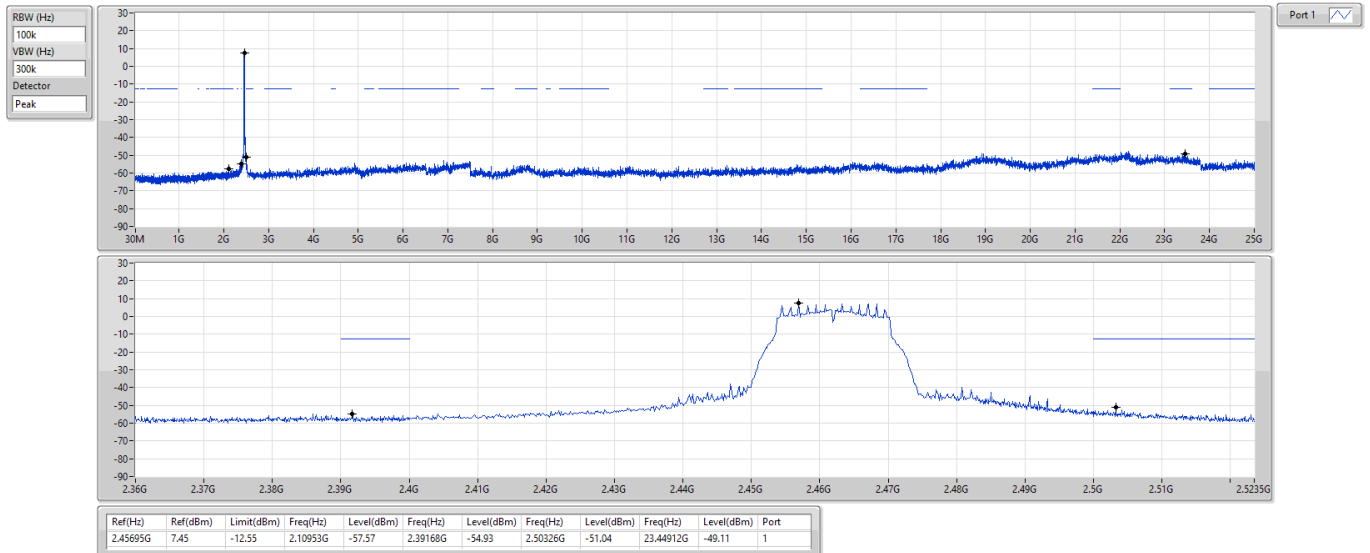




2.4-2.4835GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

CSEndB


2412MHz

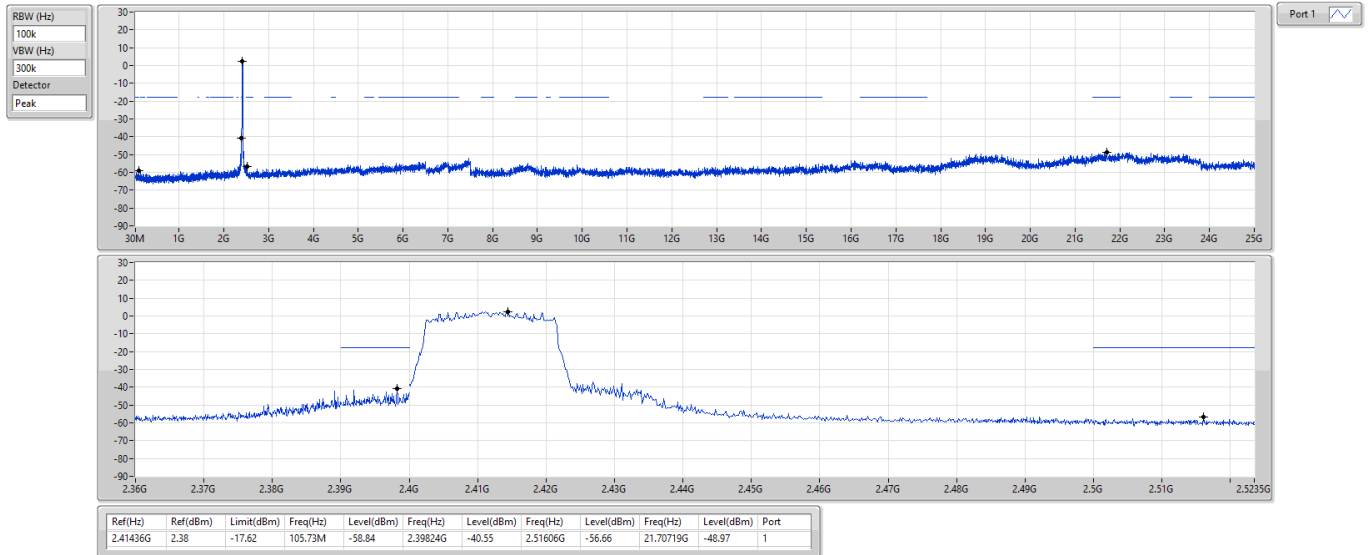

2.4-2.4835GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

CSEndB

2437MHz

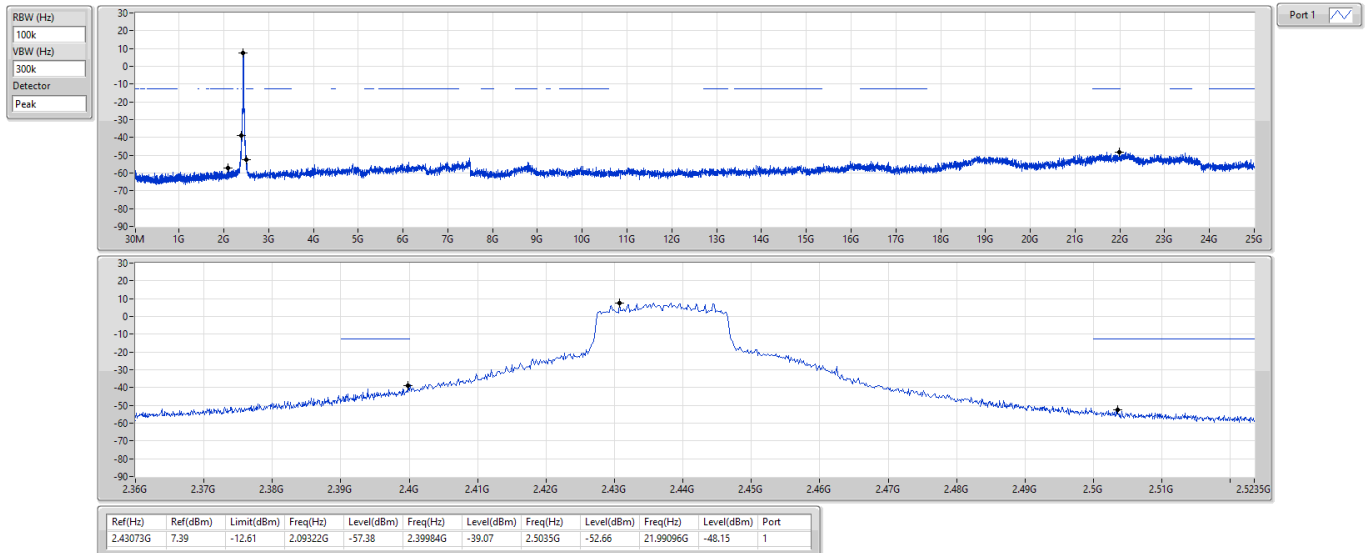




2.4-2.4835GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

CSEndB

2462MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

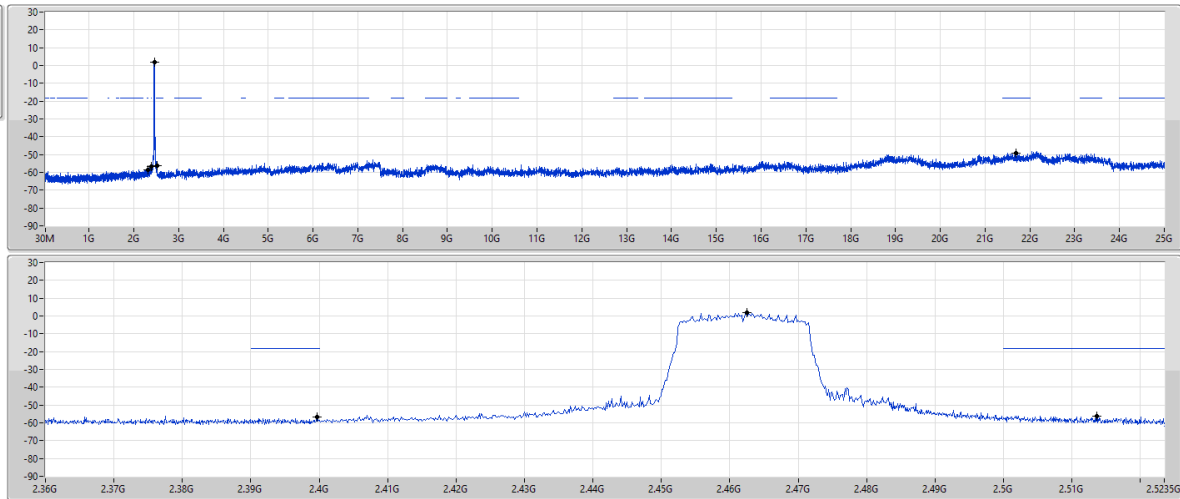


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.46246G	1.84	-18.16	2.30874G	-58.55	2.39968G	-56.57	2.51358G	-56.08	2.168472G	-49.21	1

Modulation Mode	11g	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C


Humidity: 65%

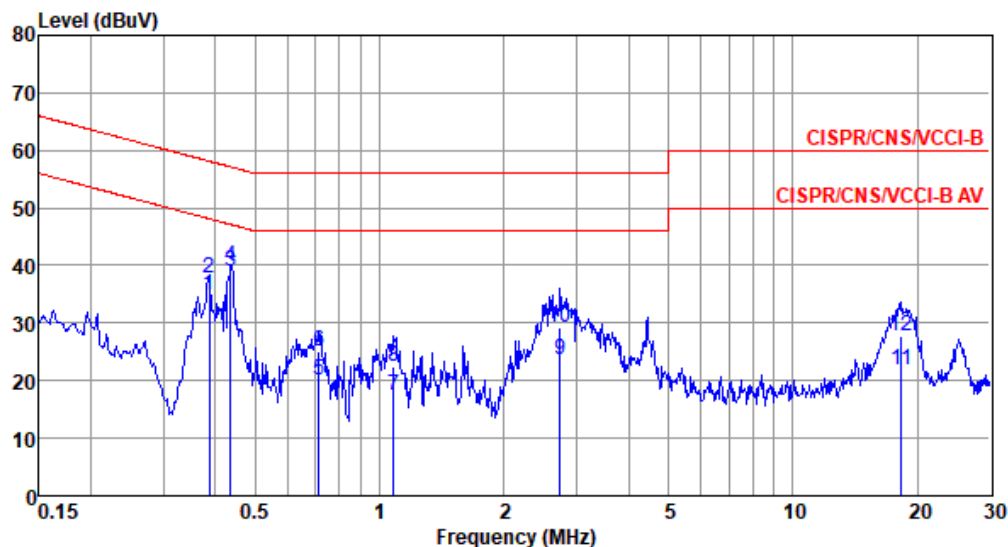

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.387	34.85	48.12	-13.27	25.17	9.64	0.04	0.00	Average
2	0.387	37.70	58.12	-20.42	28.02	9.64	0.04	0.00	QP
3*	0.436	39.07	47.14	-8.07	29.39	9.64	0.04	0.00	Average
4	0.436	39.81	57.14	-17.33	30.13	9.64	0.04	0.00	QP
5	0.712	20.09	46.00	-25.91	10.39	9.65	0.05	0.00	Average
6	0.712	25.05	56.00	-30.95	15.35	9.65	0.05	0.00	QP
7	1.082	17.33	46.00	-28.67	7.62	9.65	0.06	0.00	Average
8	1.082	22.42	56.00	-33.58	12.71	9.65	0.06	0.00	QP
9	2.736	23.72	46.00	-22.28	13.94	9.66	0.12	0.00	Average
10	2.736	29.11	56.00	-26.89	19.33	9.66	0.12	0.00	QP
11	18.328	21.79	50.00	-28.21	11.81	9.69	0.29	0.00	Average
12	18.328	27.77	60.00	-32.23	17.79	9.69	0.29	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).

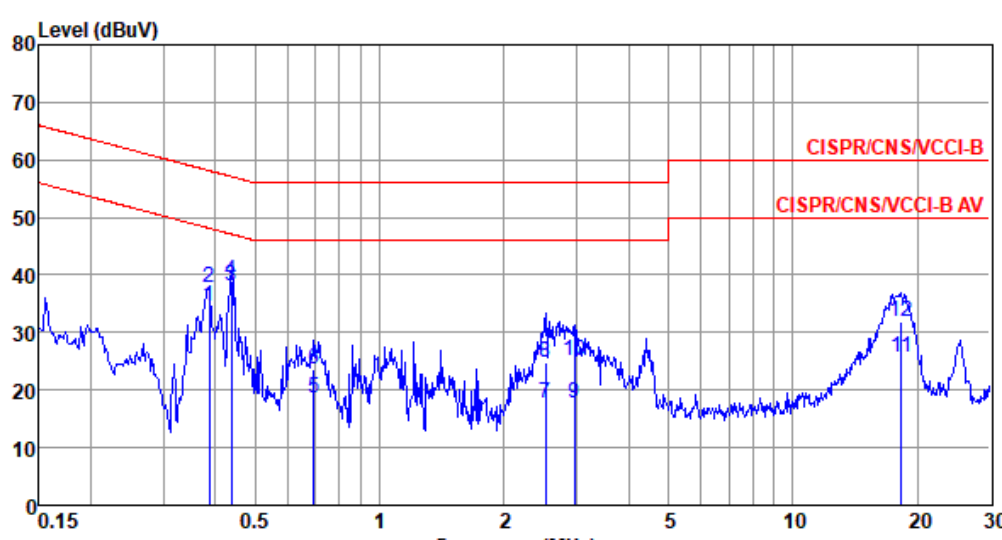Modulation Mode	11g	Test Freq. (MHz)	2437																																																																																																																																												
Power Phase	Neutral																																																																																																																																														
Test by : Akun Chung Temperature: 24°C Humidity: 65%																																																																																																																																															
 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th>Remark</th></tr><tr><td>1</td><td>0.387</td><td>34.52</td><td>48.12</td><td>-13.60</td><td>24.85</td><td>9.63</td><td>0.04</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.387</td><td>37.92</td><td>58.12</td><td>-20.20</td><td>28.25</td><td>9.63</td><td>0.04</td><td>0.00</td><td>QP</td></tr><tr><td>3*</td><td>0.437</td><td>38.22</td><td>47.11</td><td>-8.89</td><td>28.55</td><td>9.63</td><td>0.04</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.437</td><td>39.05</td><td>57.11</td><td>-18.06</td><td>29.38</td><td>9.63</td><td>0.04</td><td>0.00</td><td>QP</td></tr><tr><td>5</td><td>0.694</td><td>18.51</td><td>46.00</td><td>-27.49</td><td>8.82</td><td>9.64</td><td>0.05</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>0.694</td><td>23.63</td><td>56.00</td><td>-32.37</td><td>13.94</td><td>9.64</td><td>0.05</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>2.527</td><td>17.63</td><td>46.00</td><td>-28.37</td><td>7.87</td><td>9.65</td><td>0.11</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>2.527</td><td>24.83</td><td>56.00</td><td>-31.17</td><td>15.07</td><td>9.65</td><td>0.11</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>2.962</td><td>17.77</td><td>46.00</td><td>-28.23</td><td>7.99</td><td>9.66</td><td>0.12</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>2.962</td><td>25.14</td><td>56.00</td><td>-30.86</td><td>15.36</td><td>9.66</td><td>0.12</td><td>0.00</td><td>QP</td></tr><tr><td>11</td><td>18.328</td><td>25.62</td><td>50.00</td><td>-24.38</td><td>15.55</td><td>9.78</td><td>0.29</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>18.328</td><td>31.94</td><td>60.00</td><td>-28.06</td><td>21.87</td><td>9.78</td><td>0.29</td><td>0.00</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux			MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark	1	0.387	34.52	48.12	-13.60	24.85	9.63	0.04	0.00	Average	2	0.387	37.92	58.12	-20.20	28.25	9.63	0.04	0.00	QP	3*	0.437	38.22	47.11	-8.89	28.55	9.63	0.04	0.00	Average	4	0.437	39.05	57.11	-18.06	29.38	9.63	0.04	0.00	QP	5	0.694	18.51	46.00	-27.49	8.82	9.64	0.05	0.00	Average	6	0.694	23.63	56.00	-32.37	13.94	9.64	0.05	0.00	QP	7	2.527	17.63	46.00	-28.37	7.87	9.65	0.11	0.00	Average	8	2.527	24.83	56.00	-31.17	15.07	9.65	0.11	0.00	QP	9	2.962	17.77	46.00	-28.23	7.99	9.66	0.12	0.00	Average	10	2.962	25.14	56.00	-30.86	15.36	9.66	0.12	0.00	QP	11	18.328	25.62	50.00	-24.38	15.55	9.78	0.29	0.00	Average	12	18.328	31.94	60.00	-28.06	21.87	9.78	0.29	0.00	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux																																																																																																																																							
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark																																																																																																																																						
1	0.387	34.52	48.12	-13.60	24.85	9.63	0.04	0.00	Average																																																																																																																																						
2	0.387	37.92	58.12	-20.20	28.25	9.63	0.04	0.00	QP																																																																																																																																						
3*	0.437	38.22	47.11	-8.89	28.55	9.63	0.04	0.00	Average																																																																																																																																						
4	0.437	39.05	57.11	-18.06	29.38	9.63	0.04	0.00	QP																																																																																																																																						
5	0.694	18.51	46.00	-27.49	8.82	9.64	0.05	0.00	Average																																																																																																																																						
6	0.694	23.63	56.00	-32.37	13.94	9.64	0.05	0.00	QP																																																																																																																																						
7	2.527	17.63	46.00	-28.37	7.87	9.65	0.11	0.00	Average																																																																																																																																						
8	2.527	24.83	56.00	-31.17	15.07	9.65	0.11	0.00	QP																																																																																																																																						
9	2.962	17.77	46.00	-28.23	7.99	9.66	0.12	0.00	Average																																																																																																																																						
10	2.962	25.14	56.00	-30.86	15.36	9.66	0.12	0.00	QP																																																																																																																																						
11	18.328	25.62	50.00	-24.38	15.55	9.78	0.29	0.00	Average																																																																																																																																						
12	18.328	31.94	60.00	-28.06	21.87	9.78	0.29	0.00	QP																																																																																																																																						
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																															