


ISED Test Report

Equipment : 802.11ax Wi-Fi 6E + BT5.4 Module
Model No. : Veda IF912
Brand Name : Ezurio
Applicant : Ezurio LLC
Address : W66N220 Commerce Court, Cedarburg, WI
53012 United States Of America
Standard : ICES-003 Issue 7, Class B
Received Date : Jan. 12, 2026
Tested Date : Jan. 26 ~ Jan. 27, 2026


We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Peter Lin / Assistant Manager



Kent Chen / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Test Equipment and Calibration Data	7
1.3	Testing Applied Standards	8
1.4	Deviation from Test Standard and Measurement Procedure.....	8
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION.....	9
2.1	Testing Facility	9
2.2	The Worst Case Measurement Configuration.....	9
2.3	Local Support Equipment List	11
2.4	Test Setup Chart	11
2.5	Test Software and Operating Condition	12
3	EMISSION TESTS RESULTS	13
3.1	Conducted Emissions.....	13
3.2	Radiated Emissions.....	15
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	19
5	TEST LABORATORY INFORMATION	20

Appendix A. Conducted Emissions

Appendix B. Radiated Emissions below 1GHz

Appendix C. Radiated Emissions above 1GHz

Appendix D. Photographs of the Test Configuration

Release Record

Report No.	Version	Description	Issued Date
CI611203	Rev. 01	Initial issue	Jun. 15, 2026

Summary of Test Results

ICES-003 Emission Tests				
Ref. Std. Clause	Test Standard	Test Items	Measured	Result
3.2.1	ICES-003 Issue 7, Class B	Conducted Emissions	Under limit 14.96dB @ 165.743kHz.	Pass
3.2.2	ICES-003 Issue 7, Class B	Radiated Emissions	Under limit 5.14dB @ 285.45MHz.	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

1 General Description

1.1 Information

1.1.1 Product Details

Model Name	Part No.	Product Name	Description
Veda IF912	453-00396	802.11ax Wi-Fi 6 + BT5.4 Module	Module, Veda IF912, SIP, Tri Band, No Embedded Memory, RF Trace Pin
	453-00397		Module, Veda IF912, SIP, Tri Band, Embedded Ext. Memory, 8M PSRAM, 8M Flash, RF Trace Pin

1.1.2 Feature of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
Highest Frequency of the Internal Sources	5850MHz

1.1.3 Accessories

N/A.

1.1.4 Antenna Details

External Antenna

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
Ezurio / FlexMIMO 6E	EFD2471A3 S-10MH4L	PIFA	MHF4L	2.2	3.8	3.8	3.8	3.8
Ezurio / FlexPIFA 6E	EFD2471A3 S-10MH4L	PIFA	MHF4L	2.2	3.9	3.9	3.9	3.9
Ezurio / Mini NanoBlade Flex 6GHz	EMF2471A3 S-10MH4L	PCB Dipole	MHF4L	2.4	4.4	4.4	4.4	4.4
Joymax Electronics / Dipole 6E	TWX-100BR S3B	Dipole	RP-SMA	2	4	4	4	4
Ezurio / FlexPIFA Dual Band	001-0021	PIFA	IPEX MHF4L	2.5	3	3	3	3
Ezurio / FlexPIFA Dual Band	EFD2455A3 S-15MH4L	PIFA	MHF1	2.5	3	3	3	3

Integrated Antenna

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
Yageo / Chip Antenna	ANT1608LL 14R2460A	Chip	NA	2.3	0.1	0.1	1.8	2.5

1.2 Test Equipment and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test Date	Jan. 26, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 25, 2025	Feb. 24, 2026
LISN	R&S	ENV216	101579	May 07, 2025	May 06, 2026
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	150821	Oct. 07, 2025	Oct. 06, 2026
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Mar. 21, 2025	Mar. 20, 2026
50 ohm terminal (Support Unit)	NA	50	01	Jun. 17, 2025	Jun. 16, 2026
Measurement Software	Sporton	SENSE-EMI	V5.11.8	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission below 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test Date	Jan. 27, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	Agilent	N9038A	MY53290044	Sep. 15, 2025	Sep. 14, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Sep. 05, 2025	Sep. 04, 2026
Preamplifier	EMC	EMC02325	980194	Oct. 01, 2025	Sep. 30, 2026
LF cable 1M	EMC	EMCCFD400-NM-NM -1000	160501	Sep. 29, 2025	Sep. 28, 2026
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Sep. 29, 2025	Sep. 28, 2026
LF cable 10M	EMC	CFD400-E	CFD400-001	Sep. 29, 2025	Sep. 28, 2026
Measurement Software	Sporton	SENSE-EMI	V5.11.8	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test Date	Jan. 27, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Dec. 16, 2025	Dec. 15, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Sep. 03, 2025	Sep. 02, 2026
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC184045B	980192	Jun. 24, 2025	Jun. 23, 2026
Preamplifier	Agilent	83017A	MY39501309	Aug. 20, 2025	Aug. 19, 2026
RF Cable	EMC	EMC105-SM-SM-8000	180512	Sep. 29, 2025	Sep. 28, 2026
RF Cable	HUBER+SUHNER	EMC-104-35M-3000	MY210921	Sep. 29, 2025	Sep. 28, 2026
Measurement Software	Sporton	SENSE-EMI	V5.11.8	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ICES-003 Issue 7, Class B

ANSI C63.4-2014 amended as per ANSI C63.4a-2017

1.4 Deviation from Test Standard and Measurement Procedure

None

1.5 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty		
Test Item	Frequency	Uncertainty
Conducted Emissions	150kHz ~ 30MHz	±2.92 dB
Radiated Emissions	30MHz ~ 1GHz	±4.32 dB
	Above 1GHz	±4.9 dB

Note: The results of measurements of emissions shall reference the measurement uncertainty considerations contained in CISPR 16-4-2.

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH02-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

2.2 The Worst Case Measurement Configuration


Radiation Pretest Mode	
Pretest Mode	Operating Description
1	EUT(SC Type with 8Mb RAM): X-axis + Ant.: TWX-100BRS3B, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
2	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: TWX-100BRS3B, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
3	EUT(SC Type with 8Mb RAM): Z-axis + Ant.: TWX-100BRS3B, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
4	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: TWX-100BRS3B, Ping WiFi 2.4G AX, BT link, with laptop 120V/60Hz
5	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: EFD2471A3S-10MH4L, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
6	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: EFB2471A3S-10MH4L, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
7	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: EMF2471A3S-10MH4L, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
8	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: 001-0021, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
9	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: EFB2455A3S-15MH4L, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
10	EUT(SC Type without 8Mb RAM): Y-axis + Ant.: TWX-100BRS3B, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
11	EUT(ST Type with 8Mb RAM): Y-axis + Ant.: ANT1608LL14R2460A, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
12	EUT(ST Type without 8Mb RAM): Y-axis + Ant.: ANT1608LL14R2460A, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
Pretest Mode 2 was the worst case, and only its data was recorded in this test report.	

The Determined Worst Case Configurations	
Conducted Emissions	
Test Mode	Operating Description
1	EUT(SC Type with 8Mb RAM): X-axis + Ant.: TWX-100BRS3B, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
Radiated Emissions	
Test Mode ≤ 1GHz	Operating Description
1	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: TWX-100BRS3B, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz
Test Mode > 1GHz	Operating Description
1	EUT(SC Type with 8Mb RAM): Y-axis + Ant.: TWX-100BRS3B, Ping WiFi 5G AX, BT link, with laptop 120V/60Hz

2.3 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	S/N	Remarks
1	Laptop	DELL	Latitude 5400	CZYCM33	---
2	Printer	EPSON	XP-30	QSDK002410	---
3	Mouse	DELL	MS111-L	2C3-00N9	---
4	AP	ELECOM	WRC-XE5400G S-G	---	---
5	Cellphone	Apple	A3090	M4461GKQVR	---
6	Fixture board	---	---	---	Provided by applicant.

2.4 Test Setup Chart

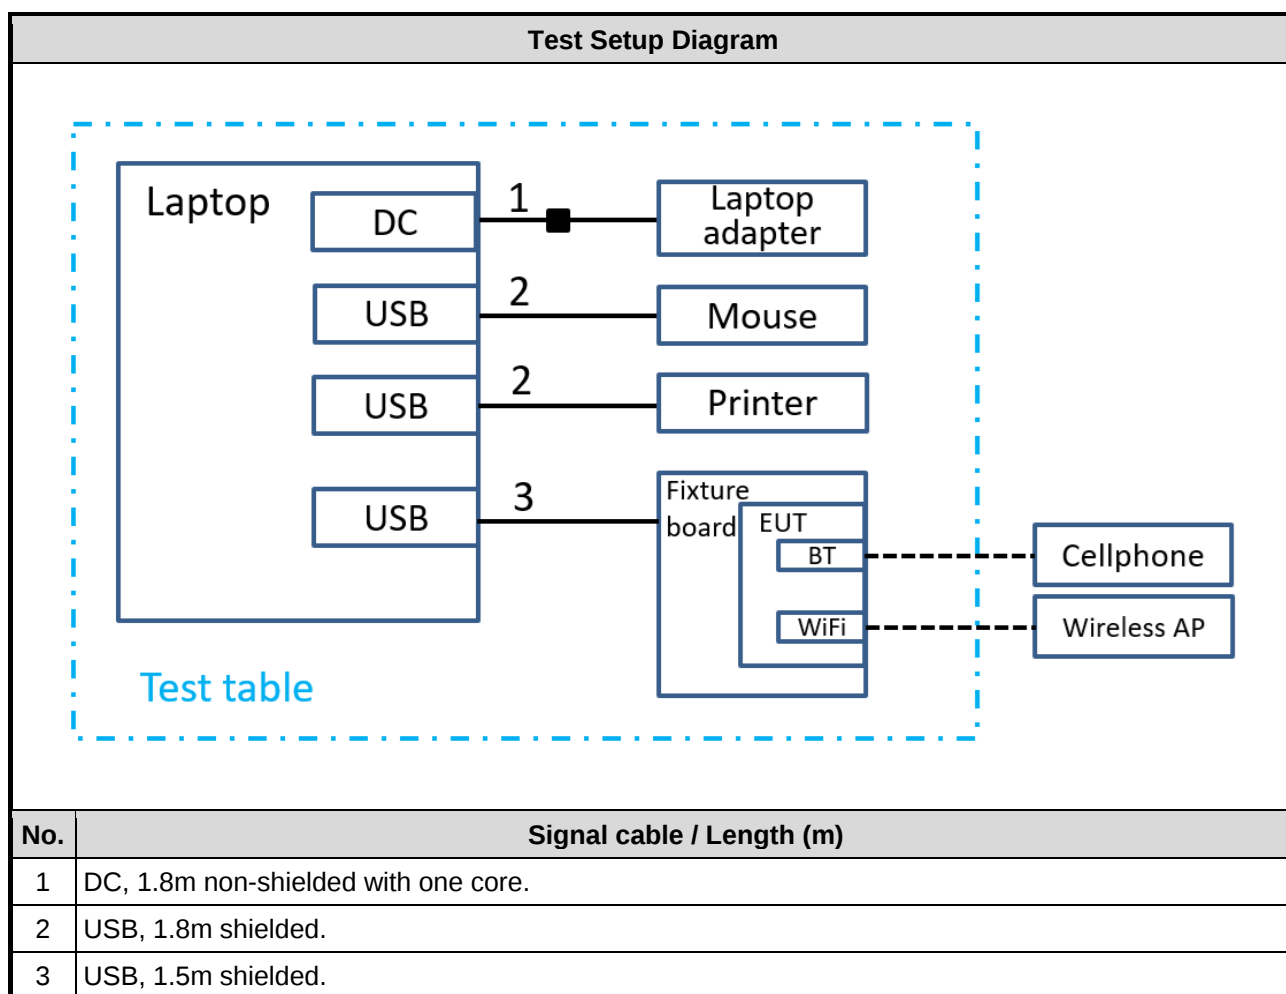

2.5 Test Software and Operating Condition

- a. To enable all function of test system.
- b. The support laptop executes "WinEMC.exe" to send "H" patterns to its monitor and the monitor displayed them.
- c. The support laptop executes "WinEMC.exe" to send "H" patterns to the printer.
- d. The support cellphone launch "AIROC Bluetooth Connect" application for EUT linking to WiFi AP.
- e. The support cellphone launch "AIROC Bluetooth Connect" application for EUT linking to BT.

3 Emission Tests Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Frequency Range (MHz)	Class A Quasi-Peak (dBuV)	Class A Average (dBuV)	Class B Quasi-Peak (dBuV)	Class B Average (dBuV)
0.15 – 0.5	79	66	66 to 56 ⁱ	56 to 46 ⁱ
0.5 – 5	73	60	56	46
5 – 30	73	60	60	50

Note: The more stringent limit applies at transition frequencies.
i. The limit level in dBuV decreases linearly with the logarithm of frequency.

3.1.2 Test Procedures

- The EUT was placed on a table with a height of 0.8 meters from the metal ground plane and 0.4 meters from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- The test equipment EUT installed received DC power through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All the support units were connected to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The measurement frequency range extends from 150 kHz to 30 MHz.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

3.1.3 Test Setup

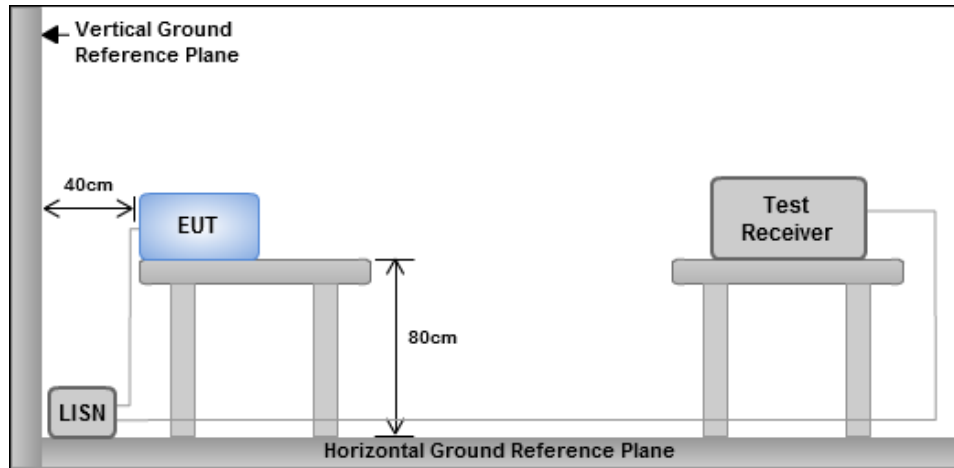

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Measurement Formula and Calculation

Level (dBuV) = Raw (Read level) + LISN (LISN factor) + CL (Cable loss) + AT (Attenuator)

Margin (dB) = Level (dBuV) – Limit (dBuV)

3.1.5 Test Results

Refer to Appendix A.

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions

Radiated emissions limits (30 MHz to 1 GHz) at 3 m distance

Frequency range (MHz)	Class A Quasi-peak (dBuV/m)	Class B Quasi-peak (dBuV/m)
30 – 88	50.0	40.0
88 – 216	54.0	43.5
216 – 230	56.9	46.0
230 – 960	57.0	47.0
960 – 1000	60.0	54.0
Note: The more stringent limit applies at transition frequencies.		

Required emission limits at 3 m distance (at and above 1 GHz)

Frequency range (GHz) ⁱ	Class A Average dB(μV/m)	Class A Peak dB(μV/m)	Class B Average dB(μV/m)	Class B Peak dB(μV/m)
1 – F _M	60	80	54	74
i. The highest measurement frequency, F _M in GHz, shall be determined as per table above.				

Required highest measurement frequency for radiated emissions:

Highest internal frequency (F _x) ⁱ	Highest measurement frequency (F _M)
F _x ≤ 108 MHz	1 GHz
108 MHz < F _x ≤ 500 MHz	2 GHz
500 MHz < F _x ≤ 1 GHz	5 GHz
F _x > 1 GHz	5 x F _x up to maximum of 40GHz
i. F _x is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	

3.2.2 Test Procedures

Measuring below 1 GHz:


- a. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- b. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- c. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Measuring above 1 GHz:


- a. Same test set up as below 1GHz radiated testing.
- b. The EUT was set 3 meters from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- c. There should be absorber placed between the EUT and Antenna and its located size should let the test site meet CISPR16-1-4 requirement.
- d. The table was rotated 360 degrees to determine the position of the highest radiation.
- e. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- f. Set the Horn Antenna at 1m height, then run the turn table to get the maximum noise reading from Horizontal and Vertical polarity separately.
- g. When EUT locating on the turn-table, the Horn Antenna must be raised up and descended down, then turning around the turn-table to get the maximum noise reading of the Horizontal and Vertical polarity separately. Note the maximum raise up height is same as the top of EUT.
- h. If emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.3 Test Setup

Radiated Emissions below 1 GHz

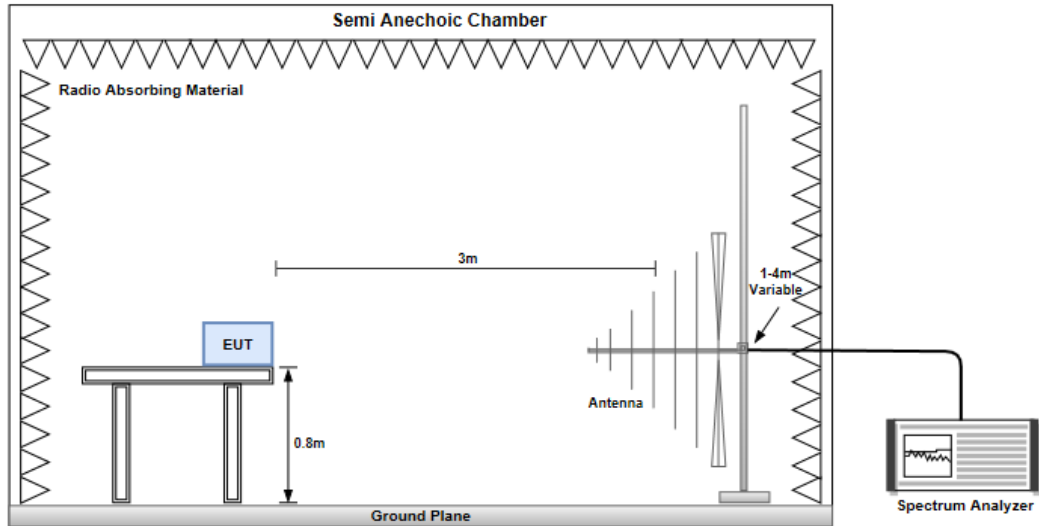

Radiated Emissions above 1 GHz

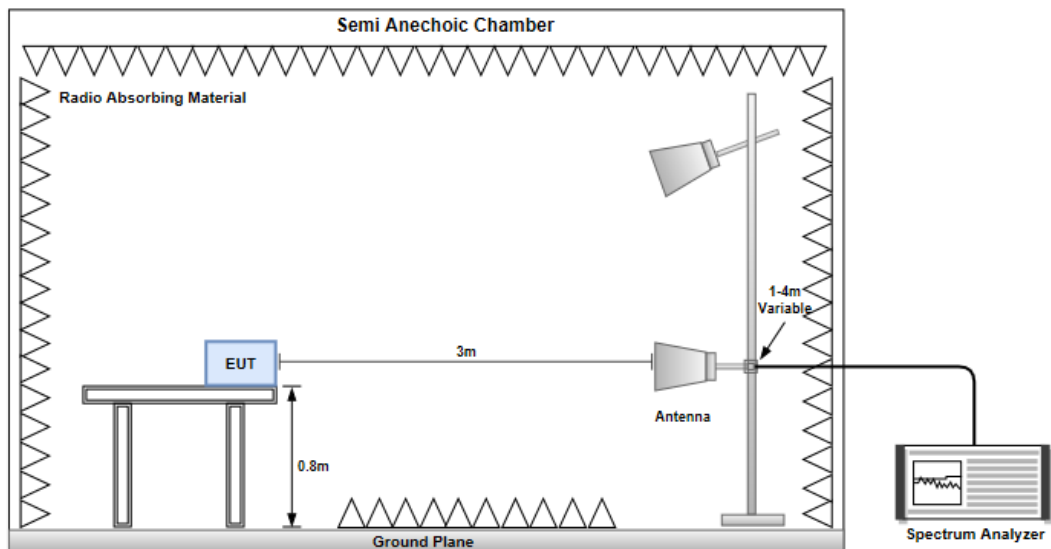

3.2.4 Measurement Formula and Calculation

Level (dBuV/m) = Raw (Read level) + AF (Antenna factor) + CL (Cable loss) – PA (Preamplifier factor)

Margin (dB) = Level (dBuV/m) – Limit (dBuV/m)

3.2.5 Test Results (Below 1GHz)

Refer to Appendix B.

3.2.6 Test Results (Above 1GHz)

Refer to Appendix C.

4 Photographs of the Test Configuration

Refer to Appendix D.

5 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==




Summary

Mode	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition
Mode 1	QP	165.743k	50.22	65.18	-14.96	9.67	Neutral




Mode 1

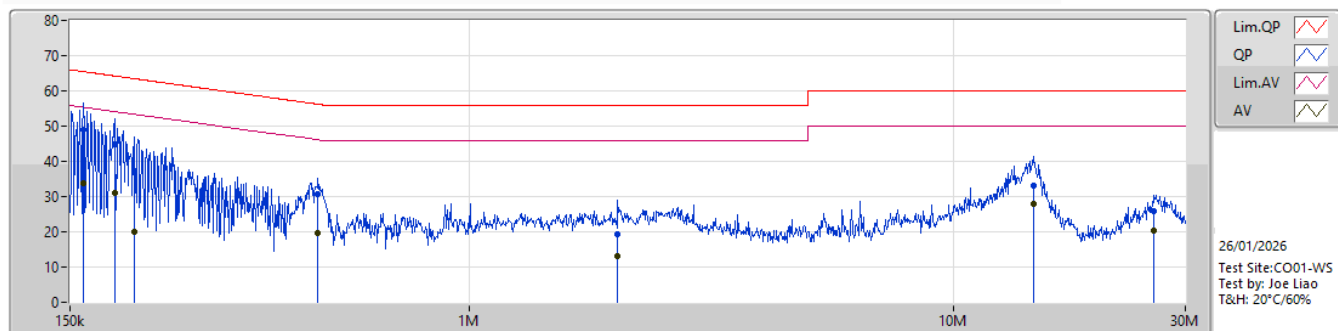

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159.893k	49.12	65.46	-16.34	9.68	Line	"Worst"	39.44	9.65	0.03	-						
AV	159.893k	33.88	55.46	-21.58	9.68	Line	"Worst"	24.20	9.65	0.03	-						
QP	185.344k	44.79	64.24	-19.45	9.68	Line	-	35.11	9.64	0.04	-						
AV	185.344k	31.16	54.24	-23.08	9.68	Line	-	21.48	9.64	0.04	-						
QP	203.167k	37.19	63.48	-26.29	9.68	Line	-	27.51	9.64	0.04	-						
AV	203.167k	19.95	53.48	-33.53	9.68	Line	-	10.27	9.64	0.04	-						
QP	487.008k	30.65	56.21	-25.56	9.68	Line	-	20.97	9.64	0.04	-						
AV	487.008k	19.81	46.21	-26.40	9.68	Line	-	10.13	9.64	0.04	-						
QP	2.025M	19.33	56.00	-36.67	9.74	Line	-	9.59	9.65	0.09	-						
AV	2.025M	13.01	46.00	-32.99	9.74	Line	-	3.27	9.65	0.09	-						
QP	14.552M	33.22	60.00	-26.78	9.96	Line	-	23.26	9.70	0.26	-						
AV	14.552M	27.85	50.00	-22.15	9.96	Line	-	17.89	9.70	0.26	-						
QP	25.857M	25.92	60.00	-34.08	9.97	Line	-	15.95	9.66	0.31	-						
AV	25.857M	20.45	50.00	-29.55	9.97	Line	-	10.48	9.66	0.31	-						

Mode 1

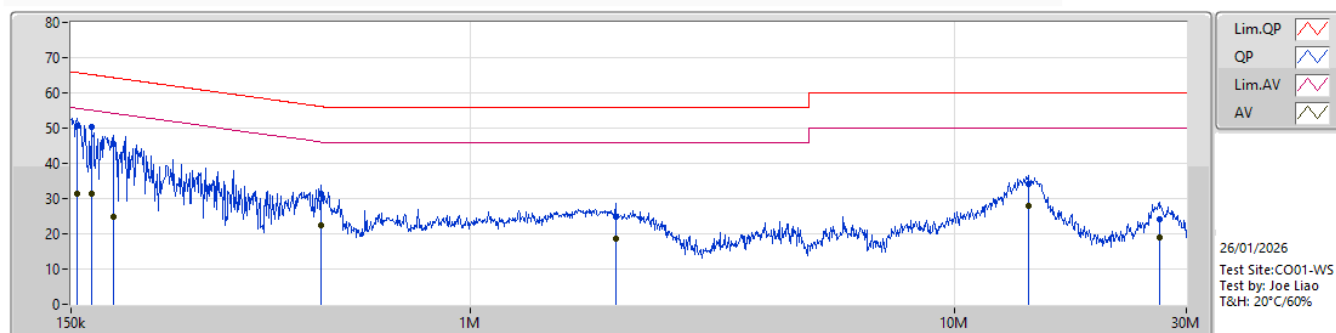

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.251k	50.66	65.77	-15.11	9.67	Neutral	-	40.99	9.64	0.03	-						
AV	154.251k	31.21	55.77	-24.56	9.67	Neutral	-	21.54	9.64	0.03	-						
QP	165.743k	50.22	65.18	-14.96	9.67	Neutral	"Worst"	40.55	9.64	0.03	-						
AV	165.743k	31.31	55.18	-23.87	9.67	Neutral	-	21.64	9.64	0.03	-						
QP	183.137k	45.50	64.34	-18.84	9.68	Neutral	-	35.82	9.64	0.04	-						
AV	183.137k	24.88	54.34	-29.46	9.68	Neutral	-	15.20	9.64	0.04	-						
QP	492.876k	31.40	56.11	-24.71	9.67	Neutral	-	21.73	9.63	0.04	-						
AV	492.876k	22.45	46.11	-23.66	9.67	Neutral	-	12.78	9.63	0.04	-						
QP	1.993M	24.89	56.00	-31.11	9.74	Neutral	-	15.15	9.65	0.09	-						
AV	1.993M	18.78	46.00	-27.22	9.74	Neutral	-	9.04	9.65	0.09	-						
QP	14.151M	34.00	60.00	-26.00	10.02	Neutral	-	23.98	9.76	0.26	-						
AV	14.151M	27.84	50.00	-22.16	10.02	Neutral	"Worst"	17.82	9.76	0.26	-						
QP	26.378M	24.27	60.00	-35.73	10.10	Neutral	-	14.17	9.79	0.31	-						
AV	26.378M	18.98	50.00	-31.02	10.10	Neutral	-	8.88	9.79	0.31	-						




Summary

Mode	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Condition	Azimuth (°)	Height (m)
Mode 1	PK	285.45M	41.86	47.00	-5.14	-7.89	Horizontal	-	-




Mode 1

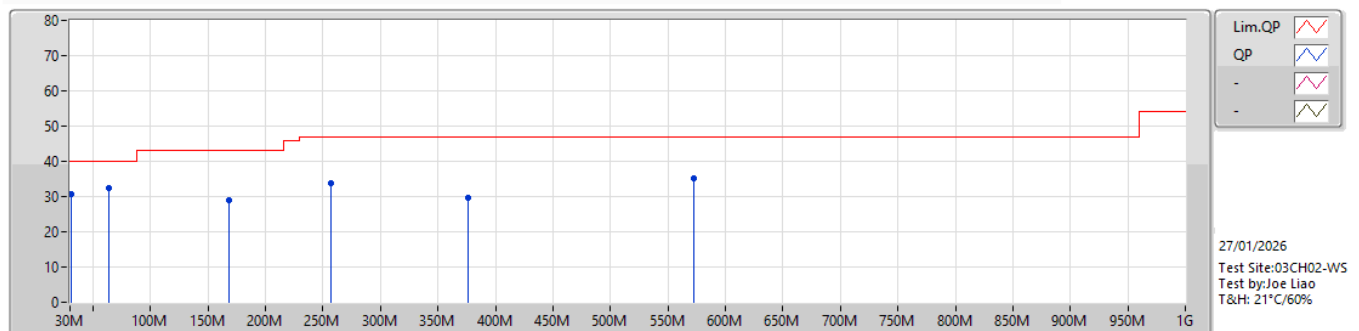

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	30.74M	30.52	40.00	-9.48	-9.34	3	Vertical	-	-	-	39.86	17.84	0.91	28.09		
PK	63.29M	32.32	40.00	-7.68	-9.21	3	Vertical	-	-	"Worst"	41.53	17.77	1.19	28.17		
PK	168.11M	29.09	43.00	-13.91	-8.53	3	Vertical	-	-	-	37.62	17.99	1.63	28.15		
PK	256.94M	33.66	47.00	-13.34	-9.22	3	Vertical	-	-	-	42.88	17.08	1.84	28.14		
PK	376.2M	29.56	47.00	-17.44	-5.38	3	Vertical	-	-	-	34.94	20.42	2.26	28.06		
PK	572.95M	35.21	47.00	-11.79	-1.08	3	Vertical	-	-	-	36.29	24.22	2.70	28.00		



Mode 1

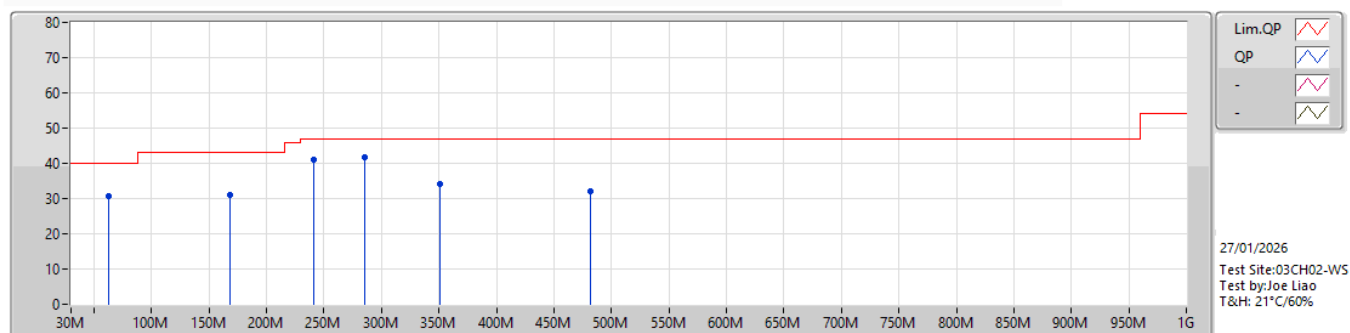

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	62.65M	30.59	40.00	-9.41	-9.12	3	Horizontal	-	-	-	39.71	17.87	1.18	28.17		
PK	168.11M	31.05	43.00	-11.95	-8.53	3	Horizontal	-	-	-	39.58	17.99	1.63	28.15		
PK	240.74M	40.87	47.00	-6.13	-9.80	3	Horizontal	-	-	-	50.67	16.53	1.81	28.14		
PK	285.45M	41.86	47.00	-5.14	-7.89	3	Horizontal	-	-	"Worst"	49.75	18.31	1.93	28.13		
PK	350.54M	33.97	47.00	-13.03	-6.38	3	Horizontal	-	-	-	40.35	19.51	2.19	28.08		
PK	481.52M	32.09	47.00	-14.91	-3.02	3	Horizontal	-	-	-	35.11	22.50	2.51	28.03		




Summary

Mode	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Condition	Azimuth (°)	Height (m)
Mode 1	AV	9.658G	39.82	54.00	-14.18	10.76	Horizontal	101	1.00



Mode 1

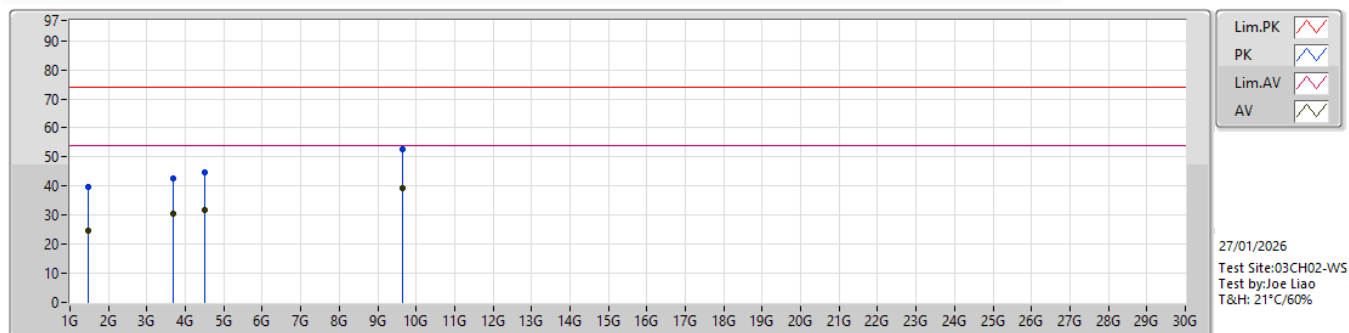


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	1.487G	39.82	74.00	-34.18	-7.55	3	Vertical	247	1.00	-	47.37	25.26	2.37	35.18		
AV	1.487G	24.63	54.00	-29.37	-7.55	3	Vertical	247	1.00	-	32.18	25.26	2.37	35.18		
PK	3.671G	42.66	74.00	-31.34	1.64	3	Vertical	73	1.00	-	41.02	30.84	3.92	33.12		
AV	3.671G	30.57	54.00	-23.43	1.64	3	Vertical	73	1.00	-	28.93	30.84	3.92	33.12		
PK	4.505G	44.63	74.00	-29.37	3.92	3	Vertical	180	1.00	-	40.71	32.02	4.48	32.58		
AV	4.505G	31.67	54.00	-22.33	3.92	3	Vertical	180	1.00	-	27.75	32.02	4.48	32.58		
PK	9.658G	52.78	74.00	-21.22	10.76	3	Vertical	71	1.00	"Worst"	42.02	37.82	7.41	34.47		
AV	9.658G	39.12	54.00	-14.88	10.76	3	Vertical	71	1.00	"Worst"	28.36	37.82	7.41	34.47		

Note: The emission levels of the other frequencies were significantly within the prescribed regulatory limits.




Mode 1

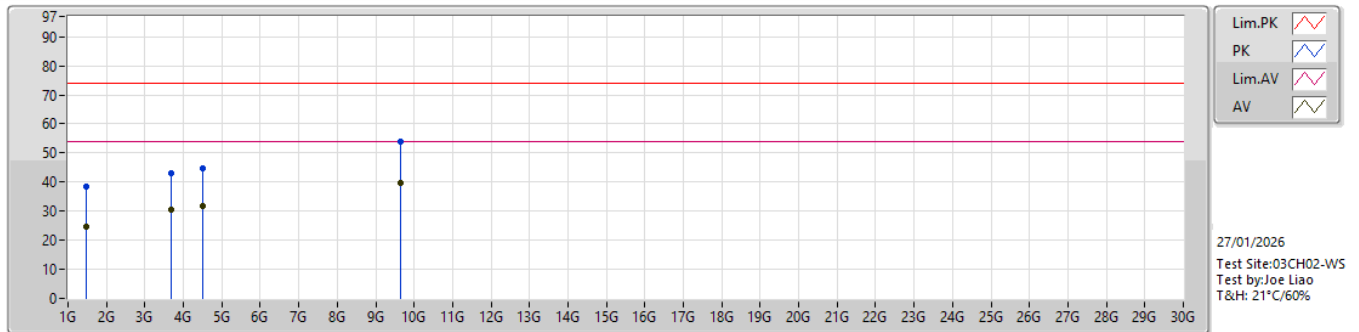



Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	1.487G	38.46	74.00	-35.54	-7.55	3	Horizontal	247	1.00	-	46.01	25.26	2.37	35.18		
AV	1.487G	24.58	54.00	-29.42	-7.55	3	Horizontal	247	1.00	-	32.13	25.26	2.37	35.18		
PK	3.671G	43.21	74.00	-30.79	1.64	3	Horizontal	158	1.00	-	41.57	30.84	3.92	33.12		
AV	3.671G	30.61	54.00	-23.39	1.64	3	Horizontal	158	1.00	-	28.97	30.84	3.92	33.12		
PK	4.505G	44.83	74.00	-29.17	3.92	3	Horizontal	67	1.00	-	40.91	32.02	4.48	32.58		
AV	4.505G	31.66	54.00	-22.34	3.92	3	Horizontal	67	1.00	-	27.74	32.02	4.48	32.58		
PK	9.658G	53.74	74.00	-20.26	10.76	3	Horizontal	101	1.00	"Worst"	42.98	37.82	7.41	34.47		
AV	9.658G	39.82	54.00	-14.18	10.76	3	Horizontal	101	1.00	"Worst"	29.06	37.82	7.41	34.47		

Note: The emission levels of the other frequencies were significantly within the prescribed regulatory limits.

Conducted Emissions Test

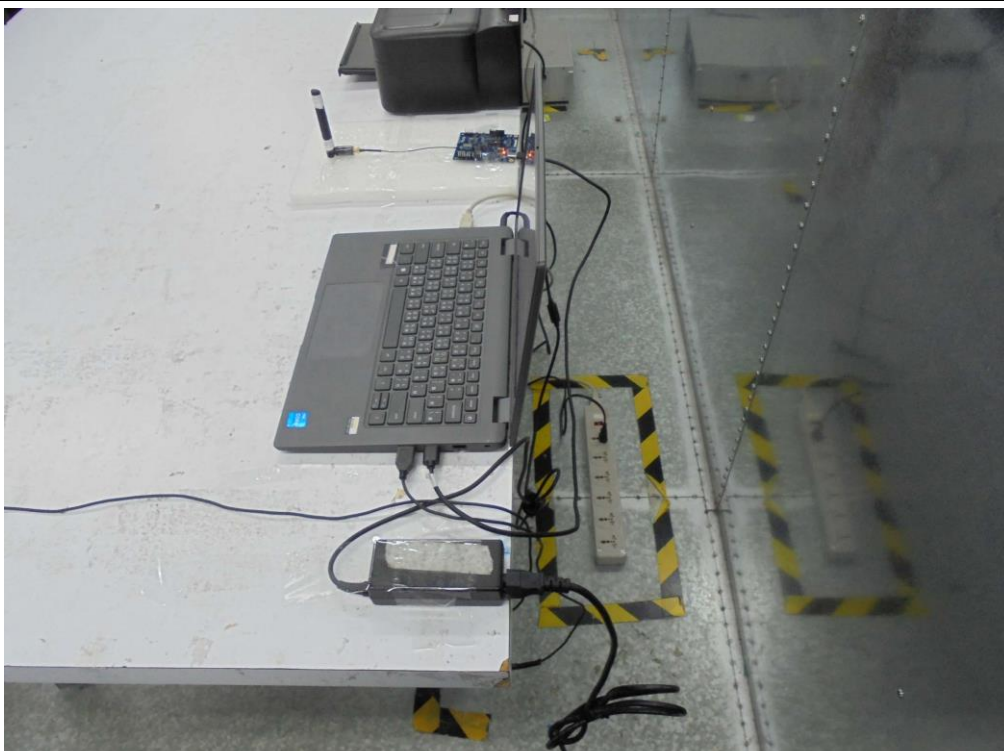

Radiated Emission Below 1GHz Test

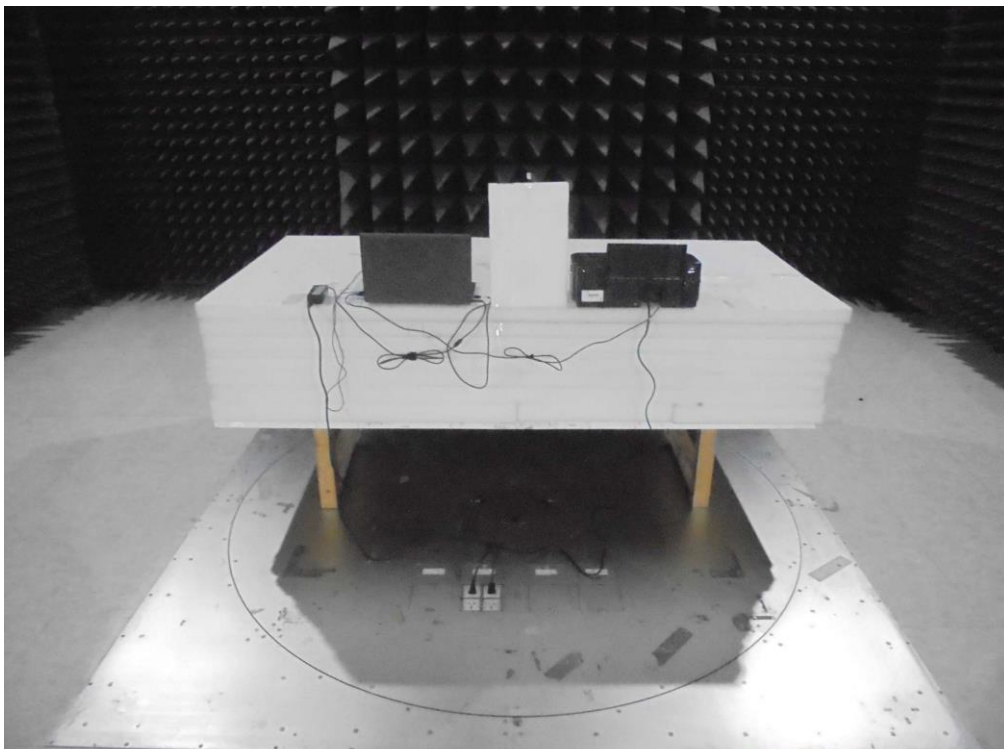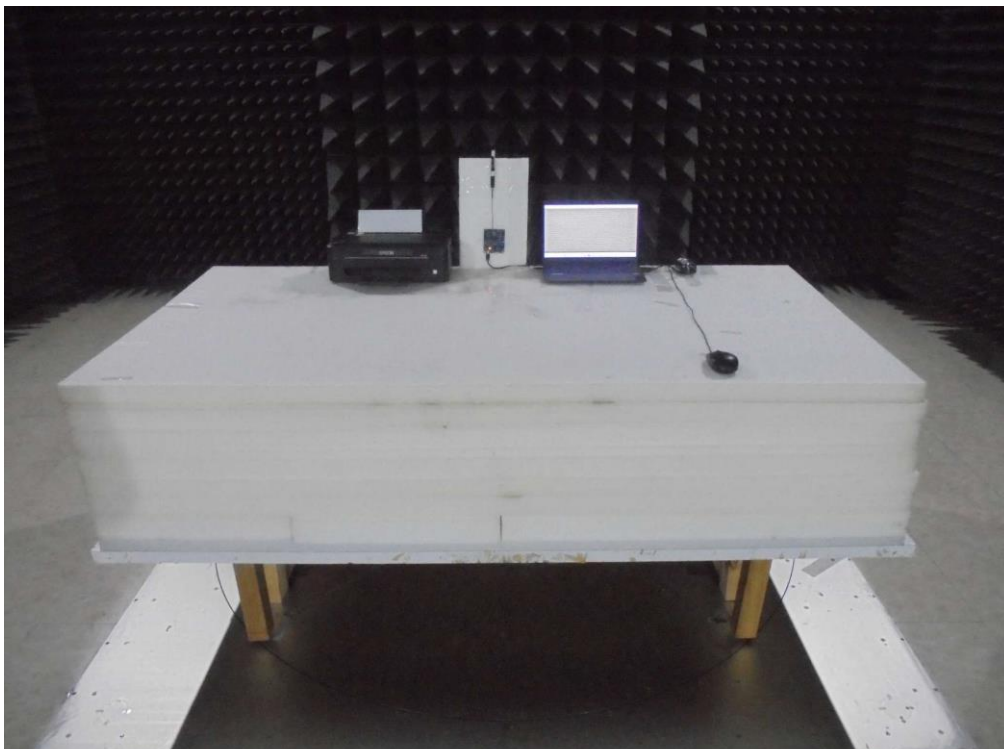

Radiated Emission Above 1GHz Test

