

The CFS69383P is a Low PIM indoor wideband omnidirectional low-profile ceiling mount antenna. It is designed to provide pattern coverage that is optimized for indoor coverage requirements at 698-960 MHz, and 1690-3800 MHz for the GSM, DCS, UMTS, AWS-3 and LTE/WiMAX frequency bands. The CFS69383P is applicable for environments where aesthetics and wide-angle coverage are necessary for successful wireless deployment. The surprisingly small size and extreme low profile enables maximum mounting flexibility while maintaining desired in-building aesthetics.

### FEATURES AND BENEFITS

- Low profile aesthetically neutral housing
- Mounts directly and easily to ceiling tile
- Supports AWS-3 frequency band
- Performance optimized using Laird proprietary RF optimization tools

ELECTRICAL SPECIFICATIONS										
Operating Frequency (MHz)	698-806	824-894	880-960	1350-1550	1690-1880	1850-1990	1910-2170	2300-2500	2500-2700	3300-3800
VSWR – Avg	<1.7:1	<1.7:1	<1.8:1	<1.4:1	<1.6:1	<1.6:1	<1.6:1	<1.7:1	<1.5:1	<1.8:1
VSWR – Max	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<2.0:1
Peak Gain – Typ (dBi)	3.5	3.9	4.8	4.8	4.4	4.5	4.4	4.9	5.4	4.8
Peak Gain – Max (dBi)	4.0	4.0	5.5	5.3	4.7	4.9	4.9	5.2	5.6	5.3
PIM - 2x20W – Typ (dBc)	< -156			< -156						
PIM - 2x20W – Max (dBc)	< -150			< -150						
Nominal Impedance (Ohms)						50				
Max Power - Ambient 25°C (W)						50				
Polarization						Linear				
Azimuth 3 dB Beamwidth						360°				

MECHANICAL SPECIFICATIONS	
Dimensions – height x diameter – mm (in.)	180.3 x 117.2 x 7.6 (7.1 x 4.6 x 0.3)
Weight with Mounting Kit – g (lbs.)	194 (0.43)
Weight without Mounting Kit – g (lbs.)	178 (0.39)
Antenna Color	White
Radome Material	PC + ABS, UL94-V0


ENVIRONMENTAL SPECIFICATIONS	
Operating Environment (Indoor or Outdoor)	Indoor
Operating Temperature – C° (F°)	-30 to +70 (-22 to +158)
Storage Temperature – C° (F°)	-40 to +85 (-40 to +185)
Material Substance Compliance	RoHS

### CONFIGURATION


PART NUMBER	CABLE LENGTH	CONNECTOR
CFS69383P-30NF	30 cm (12 in.)	Type N-female
CFS69383P-30D43F	30 cm (12 in.)	4.3-10 DIN female

RADIATION PATTERNS


698 MHz

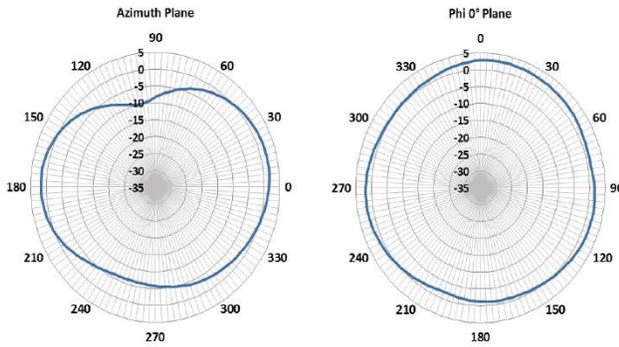


850 MHz

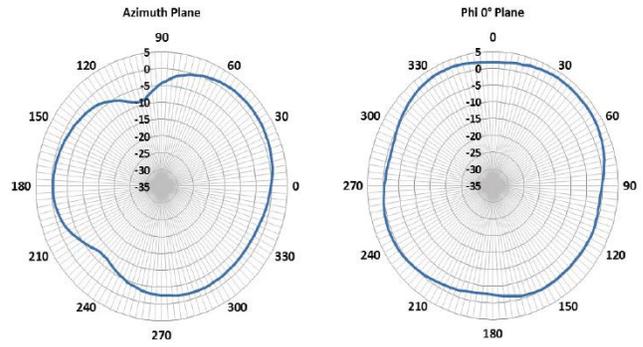


960 MHz

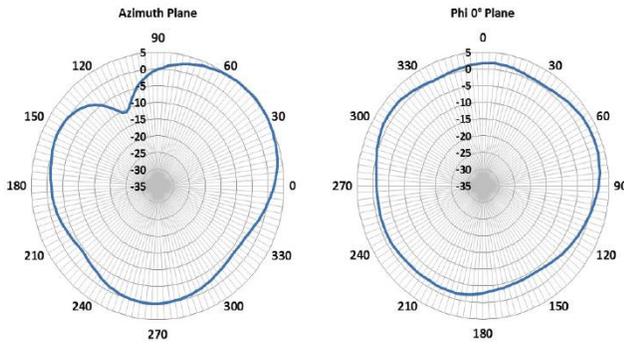


1350 MHz

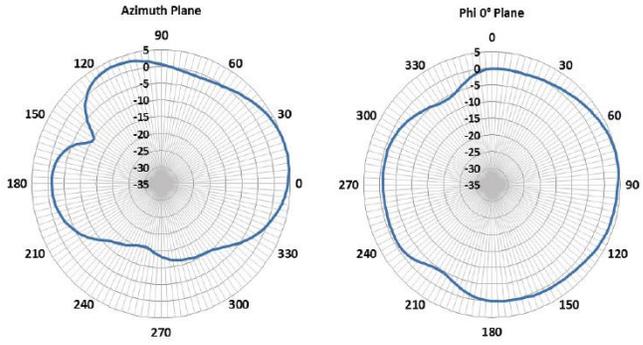

1690 MHz

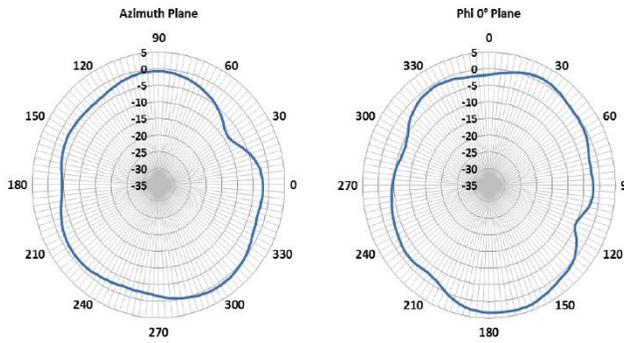


1850 MHz

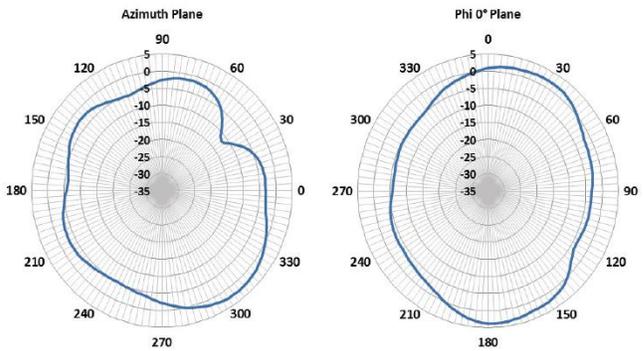


### RADIATION PATTERNS


1990 MHz

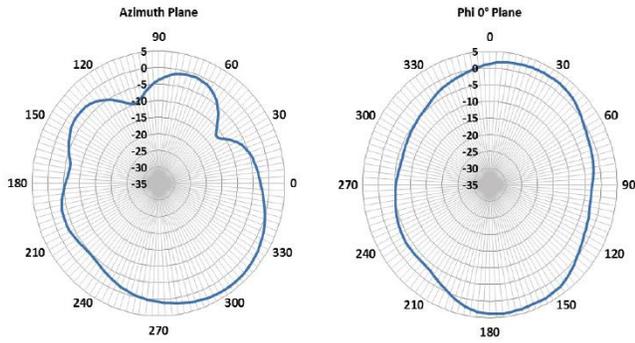


2170 MHz

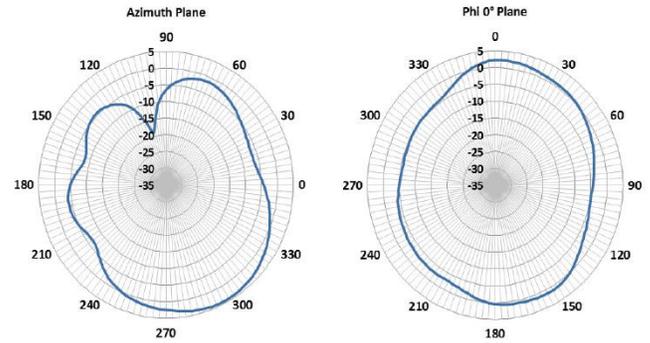


2500 MHz

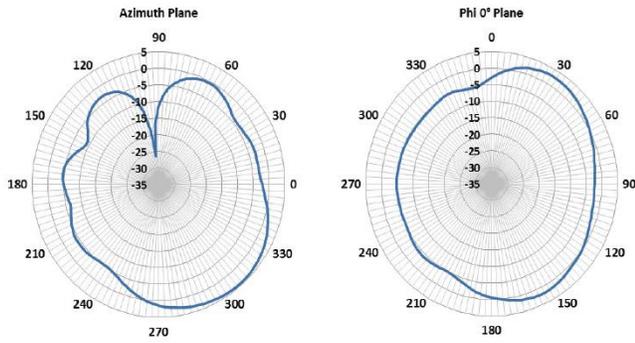


2700 MHz

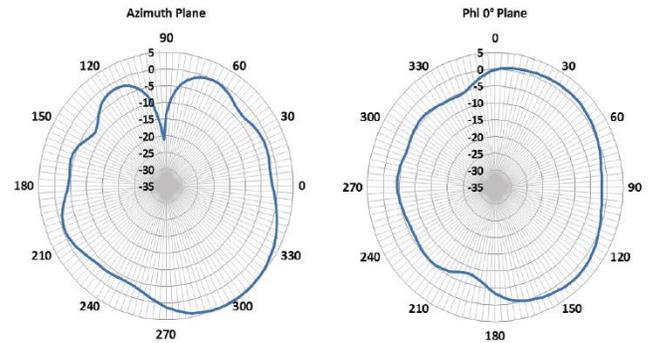

3300 MHz

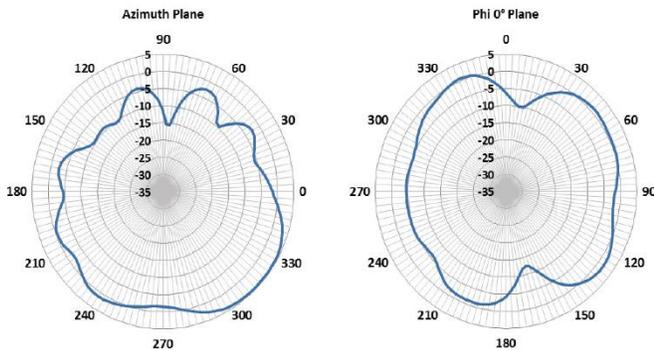

3800 MHz

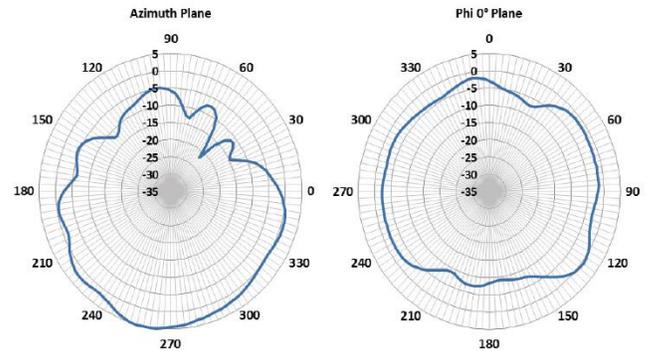

### ✓RoHS

**Americas:** +1.847.839.6925  
 IAS-AmericasSales@lairdtech.com  
**Europe:** +44.1628.858941  
 IAS-EUSales@lairdtech.com  
**Asia:** IAS-AsiaSales@lairdtech.com  
**Middle East and Africa:** +44.1628.858941  
 IAS-MEASales@lairdtech.com  
 www.lairdtech.com

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2018 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

