


IC C2PC Test Report

IC : 3147A-WB50NBT
Equipment : Wireless 802.11abgn + BT4.1 intelligent module
Model No. : WB50NBT
Brand Name : Laird
Applicant : LAIRD TECHNOLOGIES
Address : W66N220 Commerce Court, Cedarburg, WI 53012 United States Of America
Standard : RSS-247 Issue 2 February 2017
Received Date : Dec. 30, 2015
Tested Date : Mar. 11 ~ Mar. 31, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:


Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	Conducted Emissions.....	11
3.2	Unwanted Emissions into Restricted Frequency Bands	14
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	58
3.4	Conducted Output Power	63
3.5	Number of Hopping Frequency	65
3.6	20dB and Occupied Bandwidth	67
3.7	Channel Separation.....	69
3.8	Number of Dwell Time	71
4	TEST LABORATORY INFORMATION	74

Release Record

Report No.	Version	Description	Issued Date
CR631002-03AD	Rev. 01	Initial issue	Apr. 24, 2018

Summary of Test Results

IC Rules	Test Items	Measured	Result
RSS-Gen Section 8.8	Conducted Emissions	[dBuV]: 19.326MHz 24.01 (Margin -25.99dB) - AV	Pass
RSS-247 Section 5.5 RSS-Gen Section 8.9	Radiated Emissions	[dBuV/m at 3m]: 38.73MHz 36.93 (Margin -3.07dB) - PK	Pass
RSS-247 Section 5.5	Band Edge	Meet the requirement of limit	Pass
RSS-247 Section 5.1(b) RSS-247 Section 5.4(b)	Conducted Output Power	Power [dBm]: 6.08	Pass
RSS-247 Section 5.1(d)	Number of Hopping Channels	Meet the requirement of limit	Pass
RSS-247 Section 5.1(b)	Hopping Channel Separation	Meet the requirement of limit	Pass
RSS-247 Section 5.1(d)	Dwell Time	Meet the requirement of limit	Pass
N/A	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

This is a Class II Permissive Change report (C2PC).

This report is issued as a duplicate report to the original ICC report no. CR61002AD. The modification is concerned as complying with latest version of standard. Test requirements are no change thus all test data remain the same in this test report.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps
Note 1: RF output power specifies that Maximum Peak Conducted Output Power.				
Note 2: Bluetooth BR uses a GFSK.				
Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.				

1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	Laird MAF94051	Dipole	RP-SMA	2.1	2.4	2.6	3.4	3.4
2	Laird NanoBlade-IP04	PCB Dipole	IPEX MHF	2	3.9	3.9	4	4
3	Laird MAF95310 Mini NanoBlade Flex	PCB Dipole	IPEX MHF	2.79	3.38	3.38	3.38	3.38
4	Laird NanoBlue-IP04	PCB Dipole	IPEX MHF	2	---	---	---	---
5	Ethertronics WLAN_1000146	Isolated Magnetic Dipole	IPEX MHF	2.5	3.5	3.5	3.5	3.5

Note: Ant. No. 1, 3 & 5 were for 2.4G final test.

Ant. No. 1, 2 & 5 were for 5G final test.

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
--------------------------	------------------

1.1.4 Accessories

N/A

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	CSR BlueSuite, V2.5.8
-----------	-----------------------

1.1.7 Power Setting


Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	63	63	63
$\pi/4$ -DQPSK/2Mbps	63	63	63
8DPSK/3Mbps	63	63	63

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	DC Power Supply	GW INSTEK	GPC-3060D	---	---
2	Notebook	DELL	Latitude E6430	DoC	---
3	Fixture	---	---	---	---

Note: Fixture is provided by applicant.

1.3 Test Setup Chart

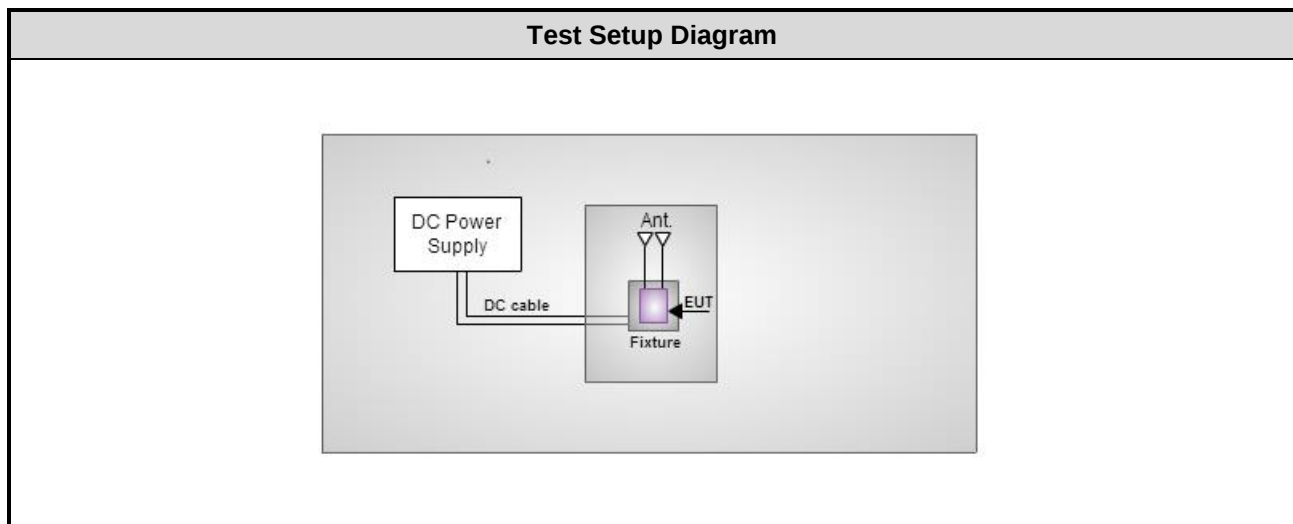

Note: The support notebook was disconnected from EUT and removed from test table when EUT is set to transmit continuously.

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Mar. 31, 2016				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Tested Date	Mar. 11 ~ Mar. 21, 2016				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 14, 2015	Sep. 13, 2016
Receiver	Agilent	N9038A	MY53290044	Oct. 14, 2015	Oct. 13, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-563	Dec. 29, 2015	Dec. 28, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 24, 2016	Feb. 23, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Preamplifier	EMC	EMC02325	980187	Sep. 21, 2015	Sep. 20, 2016
Preamplifier	Agilent	83017A	MY53270014	Sep. 07, 2015	Sep. 06, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 05, 2016	Feb. 04, 2017
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 05, 2016	Feb. 04, 2017
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 05, 2016	Feb. 04, 2017
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 05, 2016	Feb. 04, 2017
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 05, 2016	Feb. 04, 2017
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Feb. 05, 2016	Feb. 04, 2017
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Mar. 28, 2016				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
DC POWER SOURCE	GW INSTEK	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

RSS-247 Issue 2 February 2017

RSS-Gen Issue 4 November 2014

ANSI C63.10-2013

ANSI C63.4-2014

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
Conducted power	± 0.808 dB
Power density	± 0.463 dB
Conducted emission	± 2.670 dB
AC conducted emission	± 2.90 dB
Radiated emission ≤ 1 GHz	± 3.66 dB
Radiated emission > 1 GHz	± 5.37 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 60%	Alex Tsai
Radiated Emissions	03CH03-WS	20°C / 64%	Aska Huang
RF Conducted	TH01-WS	20°C / 61%	Anderson Hung

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	GFSK	2441	1Mbps	2
Radiated Emissions ≤ 1GHz	GFSK	2441	1Mbps	1, 2, 3
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	1, 2, 3
Conducted Output Power	GFSK π/4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	2
Number of Hopping Channels	GFSK 8DPSK	2402~2480 2402~2480	1Mbps 3Mbps	2
Hopping Channel Separation	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	2
Dwell Time	GFSK 8DPSK	2402 2402	1Mbps 3Mbps	2

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. The following antennas are used for final testing for this module: (See item 1.1.2 for more details.)
 - 1) Configuration 1 : Dipole antenna
 - 2) Configuration 2 : PCB Dipole antenna
 - 3) Configuration 3 : Isolated Magnetic Dipole antenna

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.4 Test Result of Conducted Emissions

Modulation Mode	GFSK	Test Freq. (MHz)	2441
Power Phase	Line		

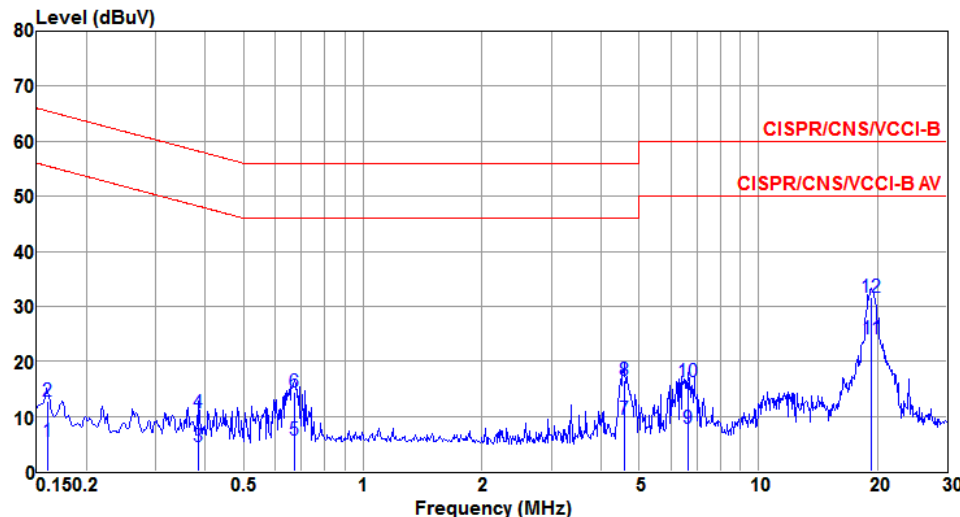

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.160	5.52	55.47	-49.95	5.39	0.11	0.02	Average
2	0.160	12.70	65.47	-52.77	12.57	0.11	0.02	QP
3	0.385	4.49	48.17	-43.68	4.33	0.13	0.03	Average
4	0.385	10.60	58.17	-47.57	10.44	0.13	0.03	QP
5	0.672	5.59	46.00	-40.41	5.41	0.13	0.05	Average
6	0.672	14.51	56.00	-41.49	14.33	0.13	0.05	QP
7	4.574	9.56	46.00	-36.44	9.23	0.20	0.13	Average
8	4.574	16.57	56.00	-39.43	16.24	0.20	0.13	QP
9	6.662	7.75	50.00	-42.25	7.39	0.22	0.14	Average
10	6.662	16.40	60.00	-43.60	16.04	0.22	0.14	QP
11@	19.326	24.01	50.00	-25.99	23.48	0.36	0.17	Average
12	19.326	31.60	60.00	-28.40	31.07	0.36	0.17	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

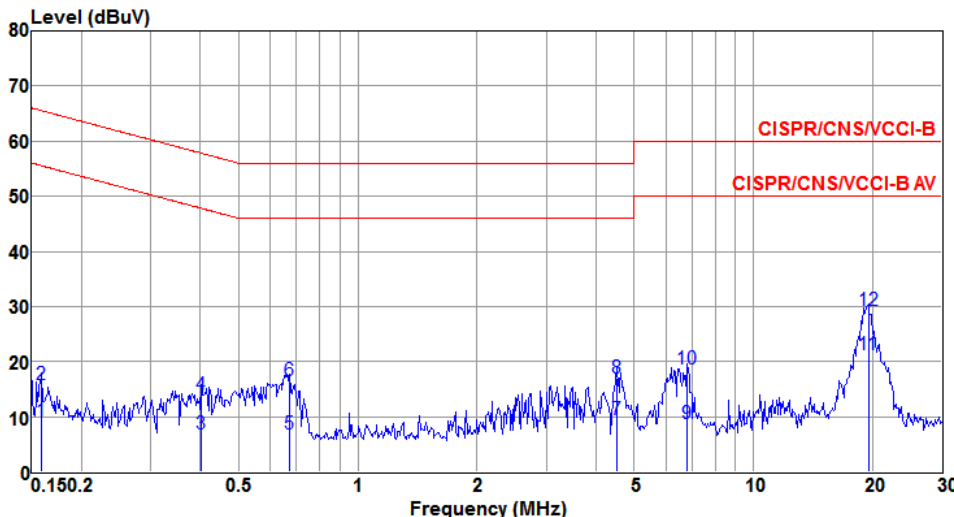Modulation Mode	GFSK	Test Freq. (MHz)	2441																																																																																																																																							
Power Phase	Neutral																																																																																																																																									
Level (dBUV)  Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>LISN</th><th>cable</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>factor</th><th>loss</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>0.159</td><td>9.19</td><td>55.52</td><td>-46.33</td><td>9.05</td><td>0.12</td><td>0.02</td><td>Average</td></tr><tr><td>2</td><td>0.159</td><td>15.93</td><td>65.52</td><td>-49.59</td><td>15.79</td><td>0.12</td><td>0.02</td><td>QP</td></tr><tr><td>3</td><td>0.402</td><td>6.86</td><td>47.81</td><td>-40.95</td><td>6.69</td><td>0.14</td><td>0.03</td><td>Average</td></tr><tr><td>4</td><td>0.402</td><td>13.96</td><td>57.81</td><td>-43.85</td><td>13.79</td><td>0.14</td><td>0.03</td><td>QP</td></tr><tr><td>5</td><td>0.672</td><td>6.97</td><td>46.00</td><td>-39.03</td><td>6.79</td><td>0.13</td><td>0.05</td><td>Average</td></tr><tr><td>6</td><td>0.672</td><td>16.53</td><td>56.00</td><td>-39.47</td><td>16.35</td><td>0.13</td><td>0.05</td><td>QP</td></tr><tr><td>7</td><td>4.501</td><td>9.39</td><td>46.00</td><td>-36.61</td><td>9.09</td><td>0.18</td><td>0.12</td><td>Average</td></tr><tr><td>8</td><td>4.501</td><td>17.06</td><td>56.00</td><td>-38.94</td><td>16.76</td><td>0.18</td><td>0.12</td><td>QP</td></tr><tr><td>9</td><td>6.805</td><td>8.76</td><td>50.00</td><td>-41.24</td><td>8.39</td><td>0.23</td><td>0.14</td><td>Average</td></tr><tr><td>10</td><td>6.805</td><td>18.63</td><td>60.00</td><td>-41.37</td><td>18.26</td><td>0.23</td><td>0.14</td><td>QP</td></tr><tr><td>11@</td><td>19.532</td><td>21.22</td><td>50.00</td><td>-28.78</td><td>20.65</td><td>0.40</td><td>0.17</td><td>Average</td></tr><tr><td>12</td><td>19.532</td><td>29.27</td><td>60.00</td><td>-30.73</td><td>28.70</td><td>0.40</td><td>0.17</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	LISN	cable			MHz	dBuV	Line	Limit	Level	factor	loss	Remark				dBuV	dB	dBuV	dB	dB		1	0.159	9.19	55.52	-46.33	9.05	0.12	0.02	Average	2	0.159	15.93	65.52	-49.59	15.79	0.12	0.02	QP	3	0.402	6.86	47.81	-40.95	6.69	0.14	0.03	Average	4	0.402	13.96	57.81	-43.85	13.79	0.14	0.03	QP	5	0.672	6.97	46.00	-39.03	6.79	0.13	0.05	Average	6	0.672	16.53	56.00	-39.47	16.35	0.13	0.05	QP	7	4.501	9.39	46.00	-36.61	9.09	0.18	0.12	Average	8	4.501	17.06	56.00	-38.94	16.76	0.18	0.12	QP	9	6.805	8.76	50.00	-41.24	8.39	0.23	0.14	Average	10	6.805	18.63	60.00	-41.37	18.26	0.23	0.14	QP	11@	19.532	21.22	50.00	-28.78	20.65	0.40	0.17	Average	12	19.532	29.27	60.00	-30.73	28.70	0.40	0.17	QP
	Freq	Level	Limit	Over	Read	LISN	cable																																																																																																																																			
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark																																																																																																																																		
			dBuV	dB	dBuV	dB	dB																																																																																																																																			
1	0.159	9.19	55.52	-46.33	9.05	0.12	0.02	Average																																																																																																																																		
2	0.159	15.93	65.52	-49.59	15.79	0.12	0.02	QP																																																																																																																																		
3	0.402	6.86	47.81	-40.95	6.69	0.14	0.03	Average																																																																																																																																		
4	0.402	13.96	57.81	-43.85	13.79	0.14	0.03	QP																																																																																																																																		
5	0.672	6.97	46.00	-39.03	6.79	0.13	0.05	Average																																																																																																																																		
6	0.672	16.53	56.00	-39.47	16.35	0.13	0.05	QP																																																																																																																																		
7	4.501	9.39	46.00	-36.61	9.09	0.18	0.12	Average																																																																																																																																		
8	4.501	17.06	56.00	-38.94	16.76	0.18	0.12	QP																																																																																																																																		
9	6.805	8.76	50.00	-41.24	8.39	0.23	0.14	Average																																																																																																																																		
10	6.805	18.63	60.00	-41.37	18.26	0.23	0.14	QP																																																																																																																																		
11@	19.532	21.22	50.00	-28.78	20.65	0.40	0.17	Average																																																																																																																																		
12	19.532	29.27	60.00	-30.73	28.70	0.40	0.17	QP																																																																																																																																		
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																										

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector
Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:
3.
$$20\log (\text{Duty cycle}) = 20\log \frac{1\text{s} / 1600 * 5}{100 \text{ ms}} = -30.1\text{dB}$$
4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup

Radiated Emissions below 1 GHz

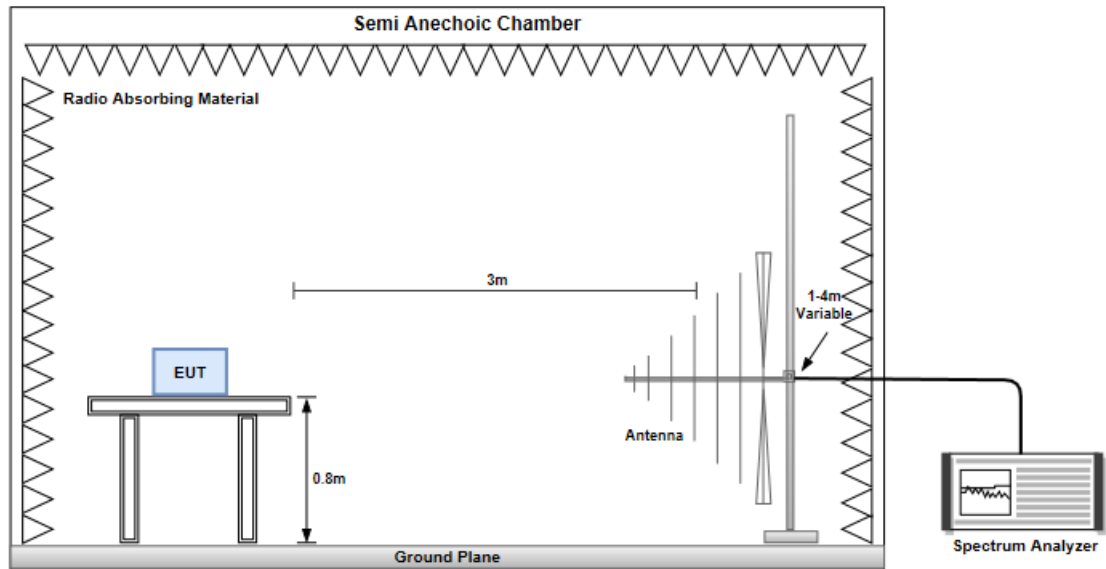


Radiated Emissions above 1 GHz

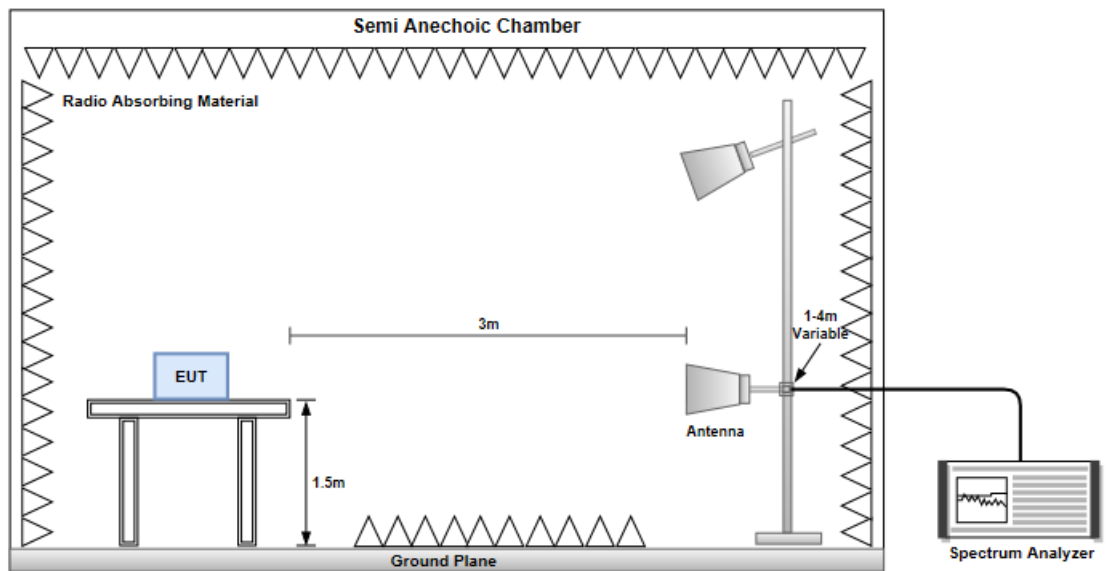

Test Configuration 1: Dipole antenna

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	1

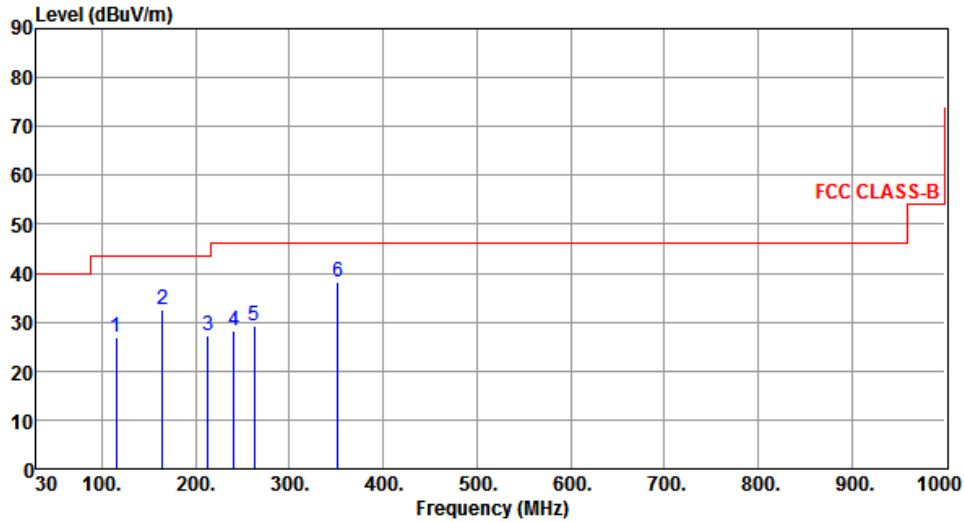


The graph displays the Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 300 MHz, and 55 dBuV/m from 300 to 1000 MHz. Six blue vertical lines represent measured peaks, labeled 1 through 6, with their frequencies and levels listed in the table below.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	115.36	27.06	43.50	-16.44	43.10	-16.04	Peak	---	---
2	164.83	32.51	43.50	-10.99	46.09	-13.58	Peak	---	---
3	213.33	27.35	43.50	-16.15	43.40	-16.05	Peak	---	---
4	240.49	28.14	46.00	-17.86	42.87	-14.73	Peak	---	---
5	262.80	29.24	46.00	-16.76	43.29	-14.05	Peak	---	---
6	352.04	38.30	46.00	-7.70	49.71	-11.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

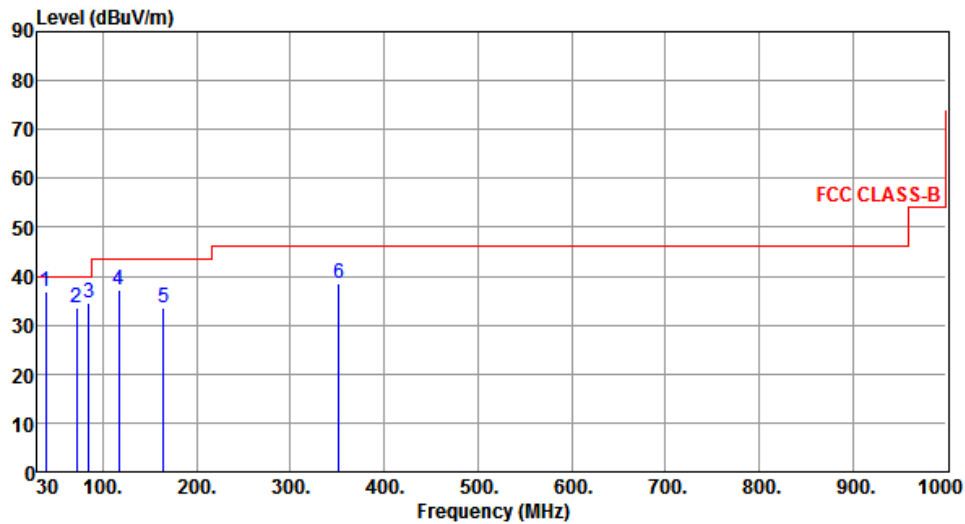

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.73	36.81	40.00	-3.19	50.27	-13.46	QP	100	0
2	71.71	33.39	40.00	-6.61	49.31	-15.92	Peak	---	---
3	85.29	34.67	40.00	-5.33	53.25	-18.58	Peak	---	---
4	117.30	37.32	43.50	-6.18	53.18	-15.86	Peak	---	---
5	164.83	33.57	43.50	-9.93	47.15	-13.58	Peak	---	---
6	352.04	38.51	46.00	-7.49	49.92	-11.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK


Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	1

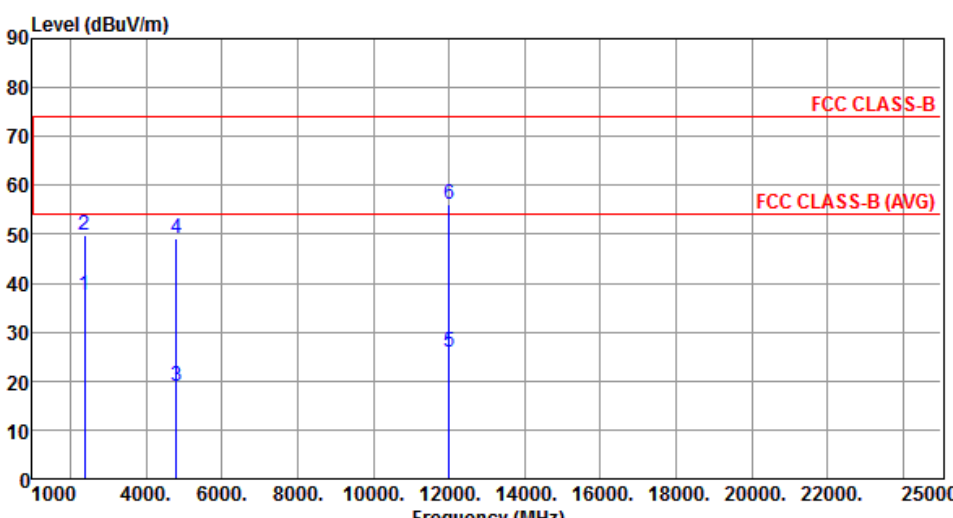

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.41	54.00	-16.59	38.51	-1.10	Average	100	236
2	2390.00	49.92	74.00	-24.08	51.02	-1.10	Peak	100	236
3	4804.00	19.05	54.00	-34.95	13.80	5.25	Average	205	9
4	4804.00	49.15	74.00	-24.85	43.90	5.25	Peak	205	9
5	12010.00	26.04	54.00	-27.96	10.97	15.07	Average	176	0
6	12010.00	56.14	74.00	-17.86	41.07	15.07	Peak	176	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	1

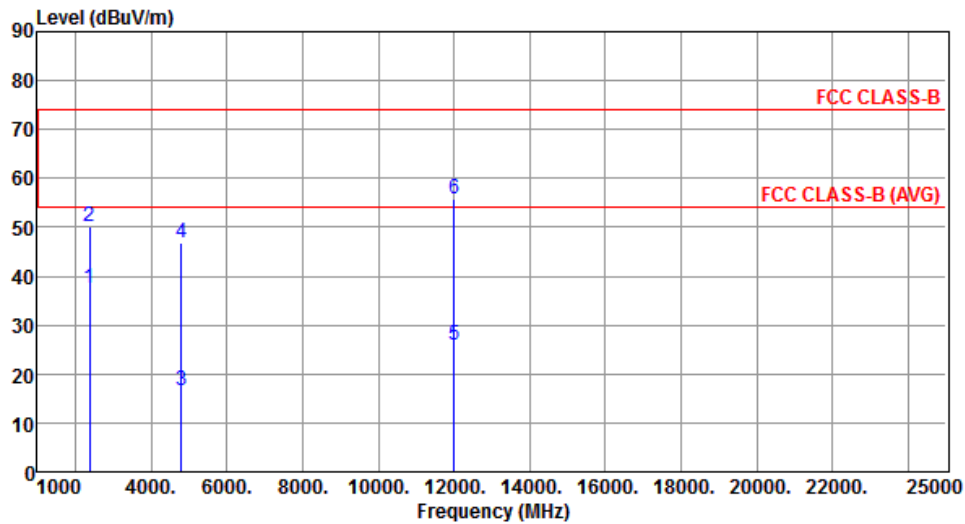


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.44	54.00	-16.56	38.54	-1.10	Average	164	183
2	2390.00	50.22	74.00	-23.78	51.32	-1.10	Peak	164	183
3	4804.00	16.76	54.00	-37.24	11.51	5.25	Average	176	274
4	4804.00	46.86	74.00	-27.14	41.61	5.25	Peak	176	274
5	12010.00	25.81	54.00	-28.19	10.74	15.07	Average	176	53
6	12010.00	55.91	74.00	-18.09	40.84	15.07	Peak	176	53

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	1

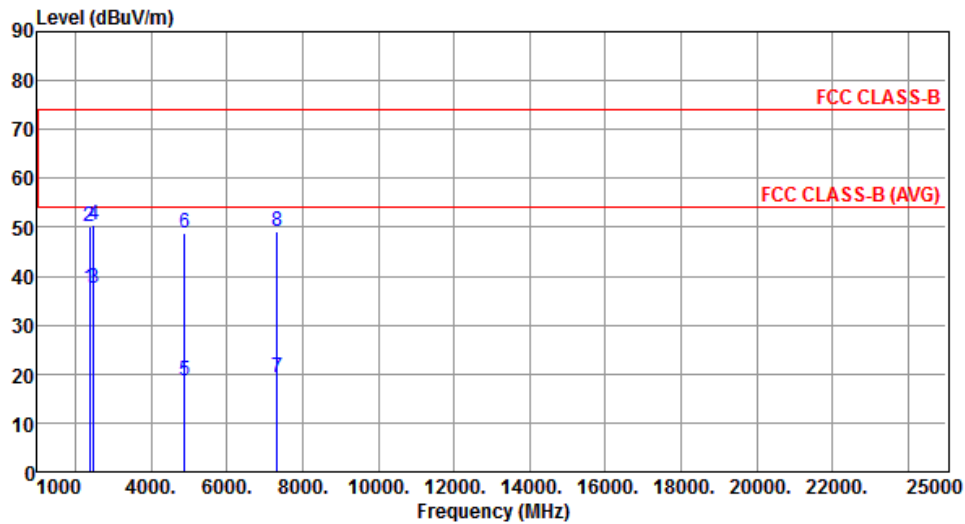


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.42	54.00	-16.58	38.52	-1.10	Average	100	235
2	2390.00	50.19	74.00	-23.81	51.29	-1.10	Peak	100	235
3	2483.50	37.59	54.00	-16.41	38.20	-0.61	Average	100	235
4	2483.50	50.63	74.00	-23.37	51.24	-0.61	Peak	100	235
5	4882.00	18.62	54.00	-35.38	13.18	5.44	Average	154	13
6	4882.00	48.72	74.00	-25.28	43.28	5.44	Peak	154	13
7	7323.00	19.19	54.00	-34.81	8.91	10.28	Average	154	53
8	7323.00	49.29	74.00	-24.71	39.01	10.28	Peak	154	53

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

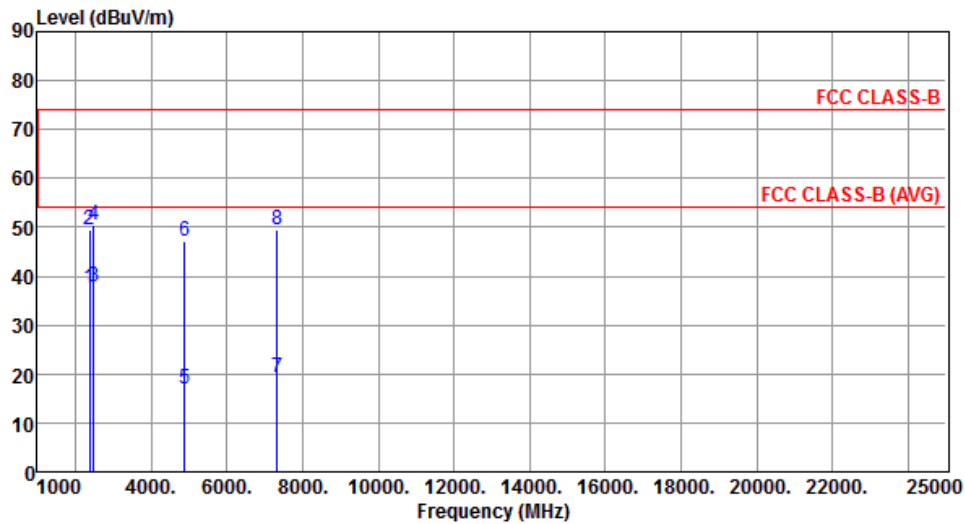


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.67	54.00	-16.33	38.77	-1.10	Average	163	184
2	2390.00	49.38	74.00	-24.62	50.48	-1.10	Peak	163	184
3	2483.50	37.72	54.00	-16.28	38.33	-0.61	Average	163	184
4	2483.50	50.53	74.00	-23.47	51.14	-0.61	Peak	163	184
5	4882.00	17.10	54.00	-36.90	11.66	5.44	Average	187	272
6	4882.00	47.20	74.00	-26.80	41.76	5.44	Peak	187	272
7	7323.00	19.29	54.00	-34.71	9.01	10.28	Average	154	166
8	7323.00	49.39	74.00	-24.61	39.11	10.28	Peak	154	166

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	1

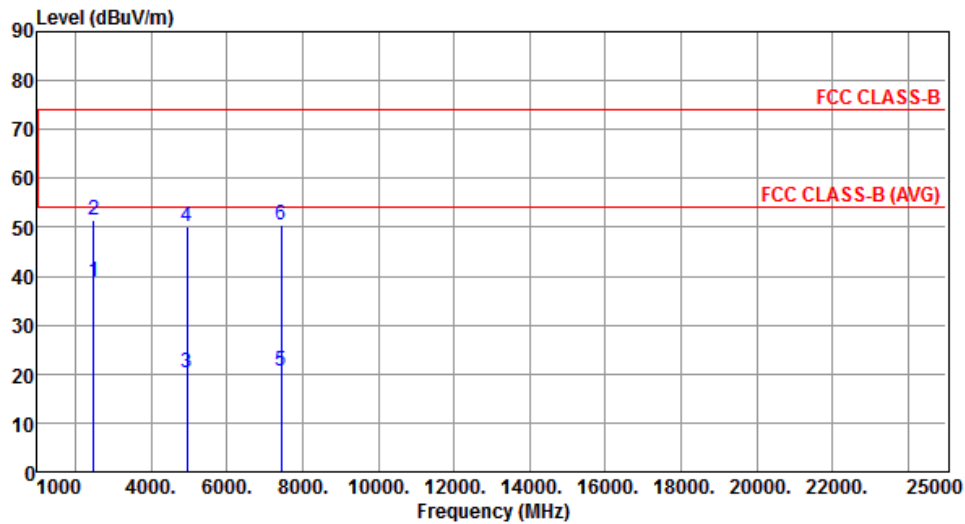


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.85	54.00	-15.15	39.46	-0.61	Average	190	236
2	2483.50	51.54	74.00	-22.46	52.15	-0.61	Peak	190	236
3	4960.00	20.13	54.00	-33.87	14.51	5.62	Average	156	23
4	4960.00	50.23	74.00	-23.77	44.61	5.62	Peak	156	23
5	7440.00	20.44	54.00	-33.56	9.88	10.56	Average	156	35
6	7440.00	50.54	74.00	-23.46	39.98	10.56	Peak	156	35

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	1

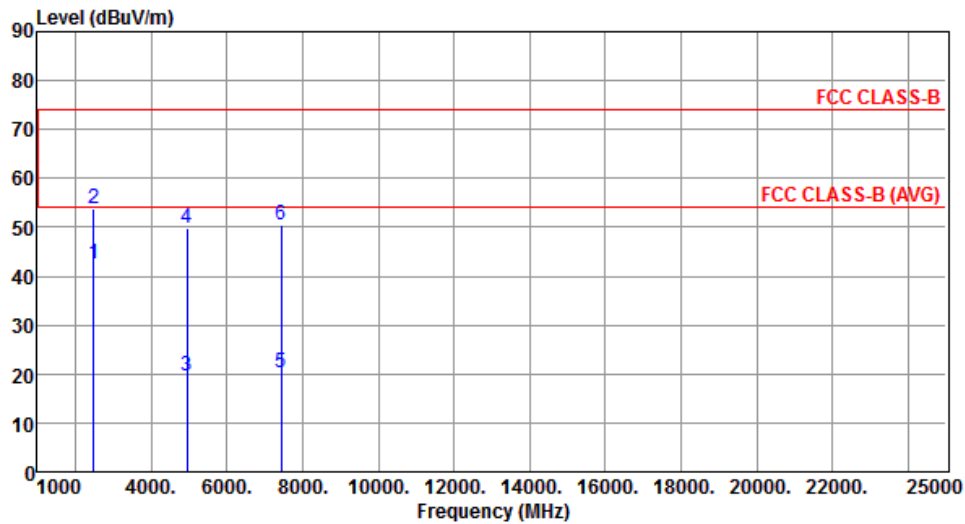

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	42.59	54.00	-11.41	43.20	-0.61	Average	165	198
2	2483.50	53.96	74.00	-20.04	54.57	-0.61	Peak	165	198
3	4960.00	19.60	54.00	-34.40	13.98	5.62	Average	129	159
4	4960.00	49.70	74.00	-24.30	44.08	5.62	Peak	129	159
5	7440.00	20.32	54.00	-33.68	9.76	10.56	Average	129	242
6	7440.00	50.42	74.00	-23.58	39.86	10.56	Peak	129	242


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK


Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	1

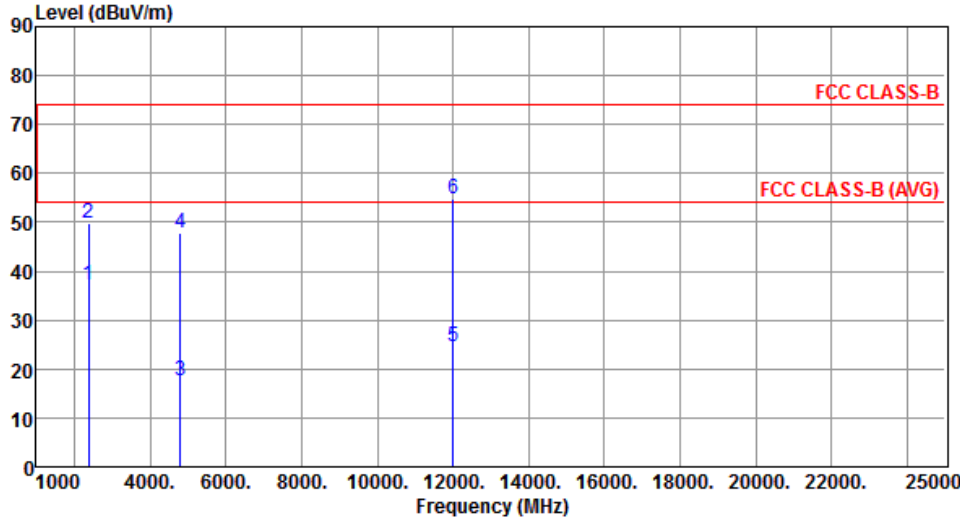

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.19	54.00	-16.81	38.29	-1.10	Average	100	235
2	2390.00	49.80	74.00	-24.20	50.90	-1.10	Peak	100	235
3	4804.00	17.68	54.00	-36.32	12.43	5.25	Average	205	9
4	4804.00	47.78	74.00	-26.22	42.53	5.25	Peak	205	9
5	12010.00	24.66	54.00	-29.34	9.59	15.07	Average	176	0
6	12010.00	54.76	74.00	-19.24	39.69	15.07	Peak	176	0

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	1

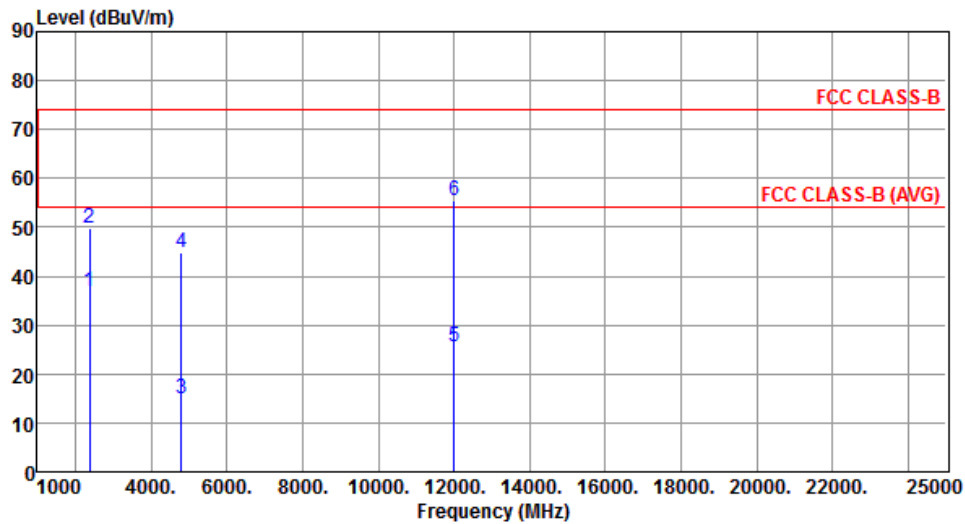


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.01	54.00	-16.99	38.11	-1.10	Average	160	182
2	2390.00	49.91	74.00	-24.09	51.01	-1.10	Peak	160	182
3	4804.00	14.78	54.00	-39.22	9.53	5.25	Average	172	272
4	4804.00	44.88	74.00	-29.12	39.63	5.25	Peak	172	272
5	12010.00	25.51	54.00	-28.49	10.44	15.07	Average	172	60
6	12010.00	55.61	74.00	-18.39	40.54	15.07	Peak	172	60

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	1

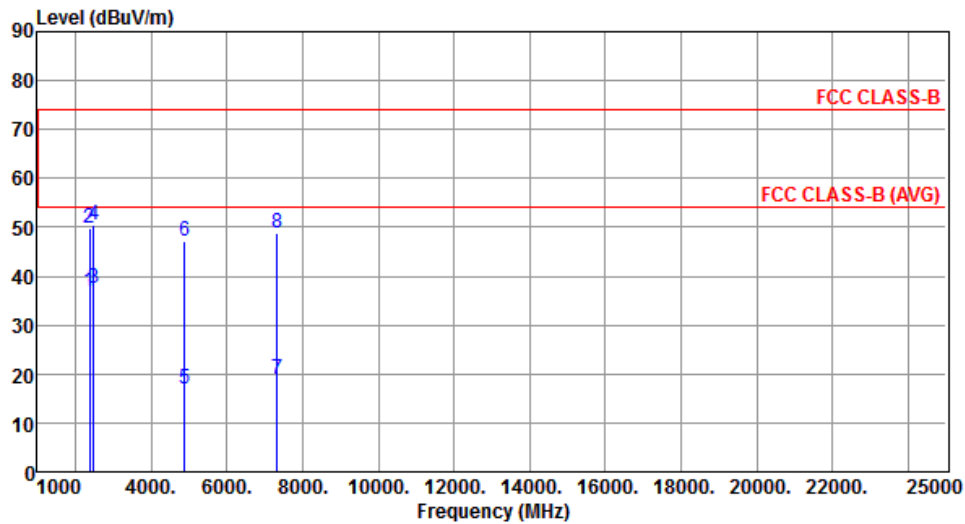


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.01	54.00	-16.99	38.11	-1.10	Average	100	236
2	2390.00	49.94	74.00	-24.06	51.04	-1.10	Peak	100	236
3	2483.50	37.43	54.00	-16.57	38.04	-0.61	Average	100	232
4	2483.50	50.48	74.00	-23.52	51.09	-0.61	Peak	100	232
5	4882.00	17.06	54.00	-36.94	11.62	5.44	Average	150	10
6	4882.00	47.16	74.00	-26.84	41.72	5.44	Peak	150	10
7	7323.00	18.86	54.00	-35.14	8.58	10.28	Average	150	51
8	7323.00	48.96	74.00	-25.04	38.68	10.28	Peak	150	51

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

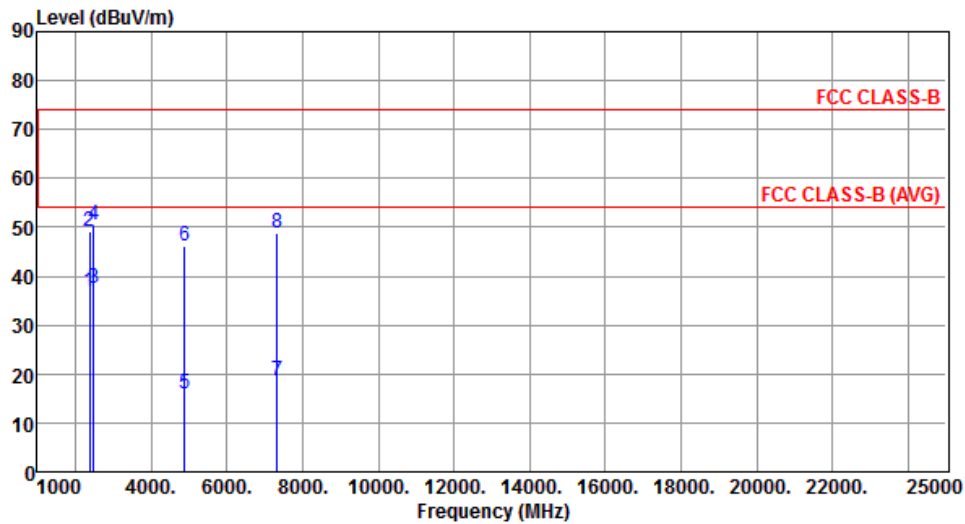


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.91	54.00	-17.09	38.01	-1.10	Average	160	177
2	2390.00	49.19	74.00	-24.81	50.29	-1.10	Peak	160	177
3	2483.50	37.48	54.00	-16.52	38.09	-0.61	Average	160	177
4	2483.50	50.32	74.00	-23.68	50.93	-0.61	Peak	160	177
5	4882.00	16.04	54.00	-37.96	10.60	5.44	Average	185	270
6	4882.00	46.14	74.00	-27.86	40.70	5.44	Peak	185	270
7	7323.00	18.68	54.00	-35.32	8.40	10.28	Average	152	161
8	7323.00	48.78	74.00	-25.22	38.50	10.28	Peak	152	161

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	1

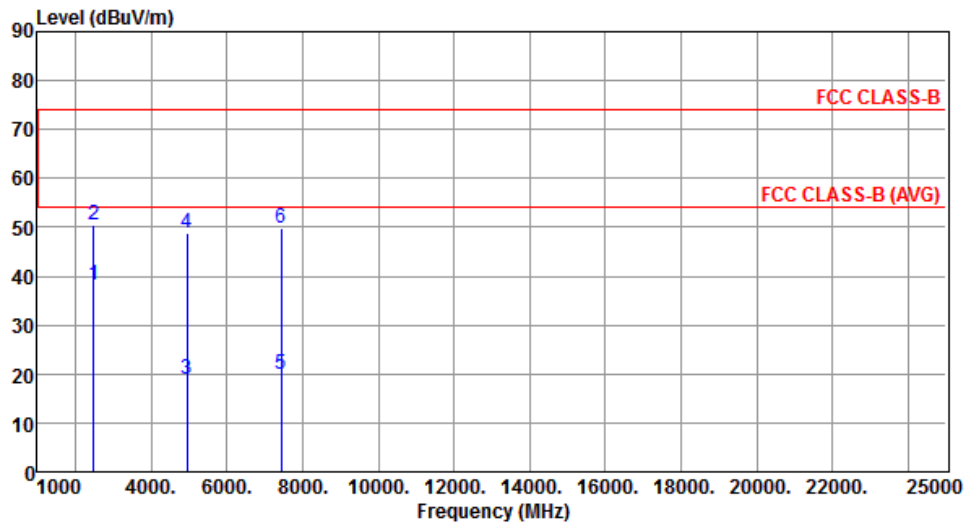


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.30	54.00	-15.70	38.91	-0.61	Average	185	235
2	2483.50	50.42	74.00	-23.58	51.03	-0.61	Peak	185	235
3	4960.00	18.77	54.00	-35.23	13.15	5.62	Average	152	16
4	4960.00	48.87	74.00	-25.13	43.25	5.62	Peak	152	16
5	7440.00	19.81	54.00	-34.19	9.25	10.56	Average	152	41
6	7440.00	49.91	74.00	-24.09	39.35	10.56	Peak	152	41

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	1

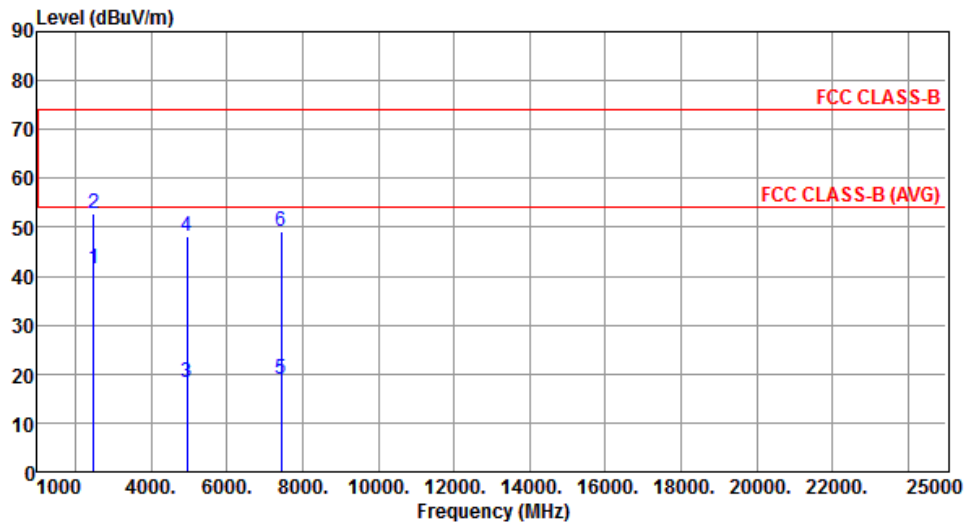

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	41.60	54.00	-12.40	42.21	-0.61	Average	158	185
2	2483.50	52.84	74.00	-21.16	53.45	-0.61	Peak	158	185
3	4960.00	18.17	54.00	-35.83	12.55	5.62	Average	130	160
4	4960.00	48.27	74.00	-25.73	42.65	5.62	Peak	130	160
5	7440.00	19.08	54.00	-34.92	8.52	10.56	Average	125	240
6	7440.00	49.18	74.00	-24.82	38.62	10.56	Peak	125	240

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Test Configuration 2: PCB Dipole antenna

3.2.7 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	2

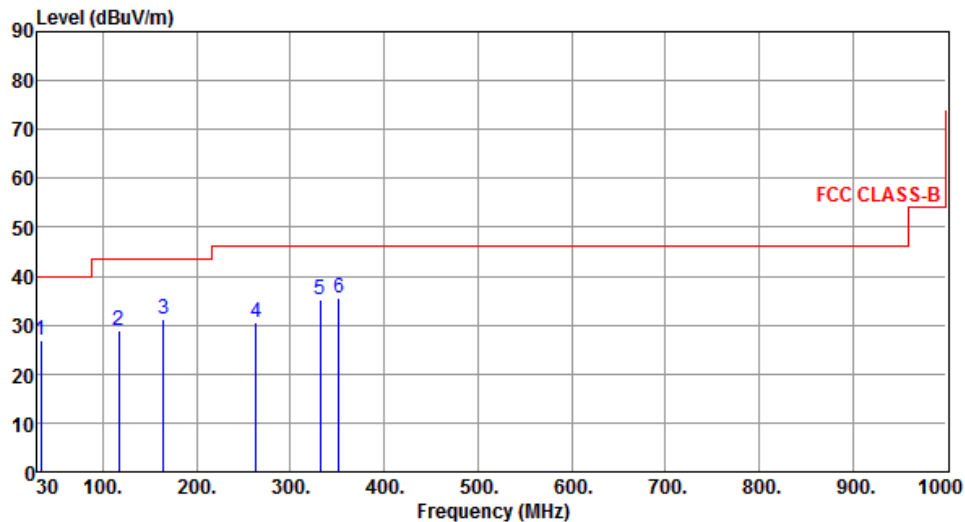

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	33.88	26.77	40.00	-13.23	40.69	-13.92	Peak	---	---
2	117.30	28.75	43.50	-14.75	44.61	-15.86	Peak	---	---
3	164.83	31.14	43.50	-12.36	44.72	-13.58	Peak	---	---
4	263.77	30.67	46.00	-15.33	44.67	-14.00	Peak	---	---
5	331.67	35.35	46.00	-10.65	47.31	-11.96	Peak	---	---
6	352.04	35.69	46.00	-10.31	47.10	-11.41	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	2

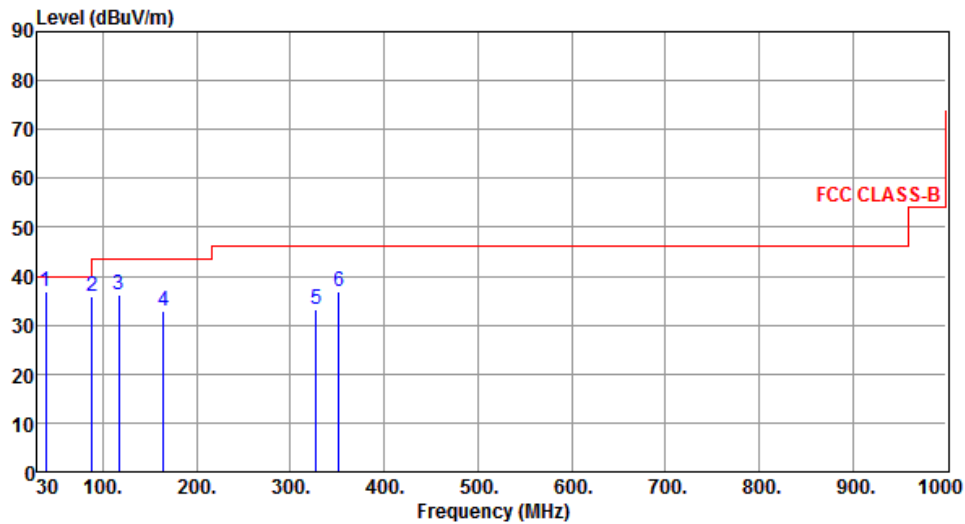

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.73	36.93	40.00	-3.07	50.39	-13.46	Peak	---	---
2	88.20	35.73	43.50	-7.77	54.96	-19.23	Peak	---	---
3	117.30	36.34	43.50	-7.16	52.20	-15.86	Peak	---	---
4	164.83	32.77	43.50	-10.73	46.35	-13.58	Peak	---	---
5	327.79	33.35	46.00	-12.65	45.41	-12.06	Peak	---	---
6	352.04	36.77	46.00	-9.23	48.18	-11.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK


Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	2

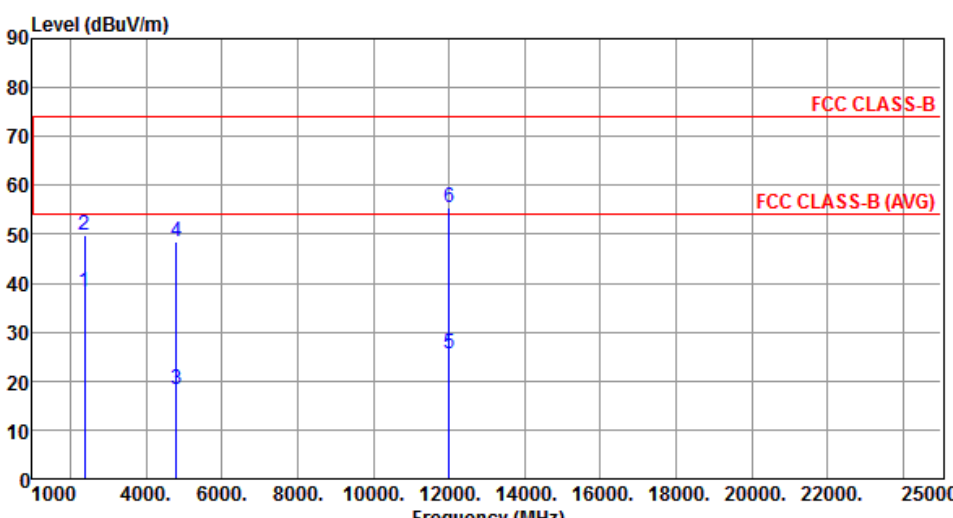

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.18	54.00	-15.82	39.28	-1.10	Average	100	176
2	2390.00	49.89	74.00	-24.11	50.99	-1.10	Peak	100	176
3	4804.00	18.39	54.00	-35.61	13.14	5.25	Average	100	10
4	4804.00	48.49	74.00	-25.51	43.24	5.25	Peak	100	10
5	12010.00	25.50	54.00	-28.50	10.43	15.07	Average	100	42
6	12010.00	55.60	74.00	-18.40	40.53	15.07	Peak	100	42

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	2

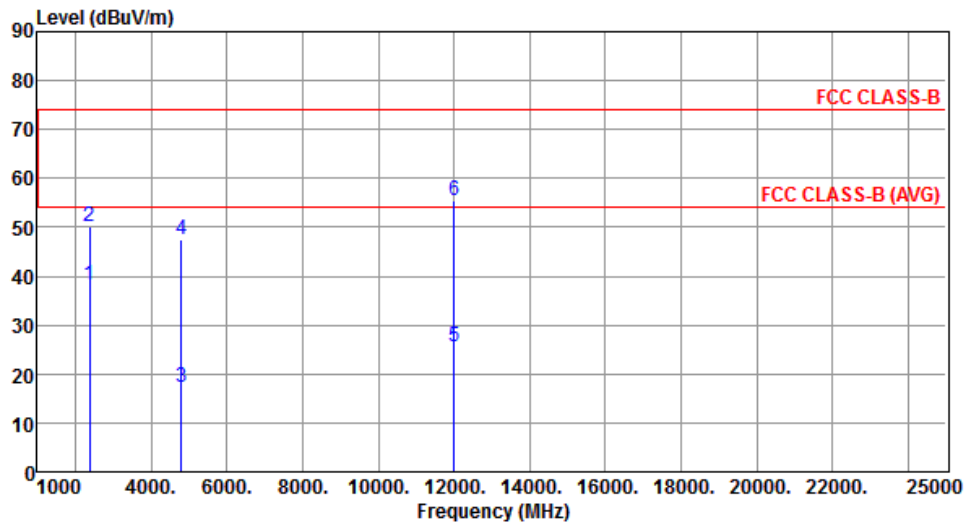


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.19	54.00	-15.81	39.29	-1.10	Average	100	255
2	2390.00	50.27	74.00	-23.73	51.37	-1.10	Peak	100	255
3	4804.00	17.39	54.00	-36.61	12.14	5.25	Average	100	265
4	4804.00	47.49	74.00	-26.51	42.24	5.25	Peak	110	265
5	12010.00	25.41	54.00	-28.59	10.34	15.07	Average	100	20
6	12010.00	55.51	74.00	-18.49	40.44	15.07	Peak	100	20

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	2

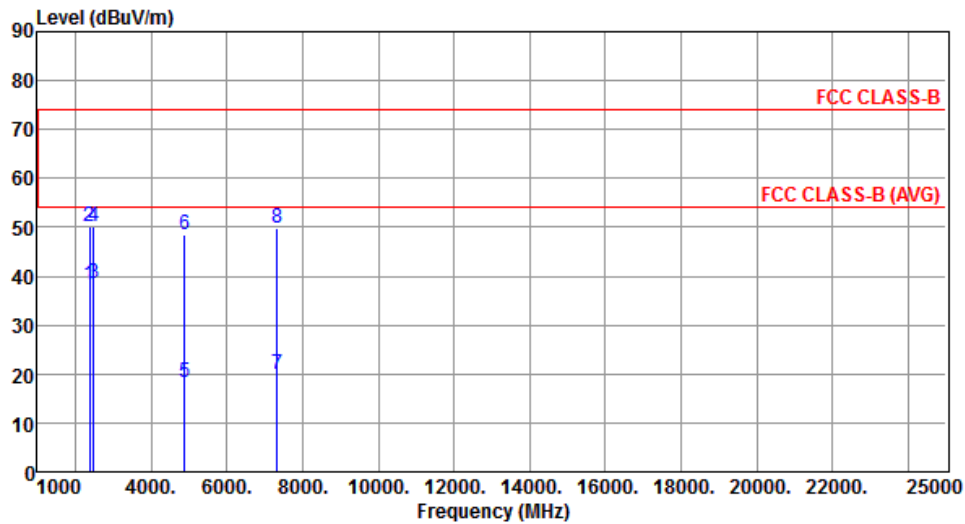


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.11	54.00	-15.89	39.21	-1.10	Average	100	177
2	2390.00	50.07	74.00	-23.93	51.17	-1.10	Peak	100	177
3	2483.50	38.69	54.00	-15.31	39.30	-0.61	Average	100	177
4	2483.50	50.19	74.00	-23.81	50.80	-0.61	Peak	100	177
5	4882.00	18.36	54.00	-35.64	12.92	5.44	Average	100	15
6	4882.00	48.46	74.00	-25.54	43.02	5.44	Peak	100	15
7	7323.00	19.86	54.00	-34.14	9.58	10.28	Average	112	208
8	7323.00	49.96	74.00	-24.04	39.68	10.28	Peak	112	208

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	2

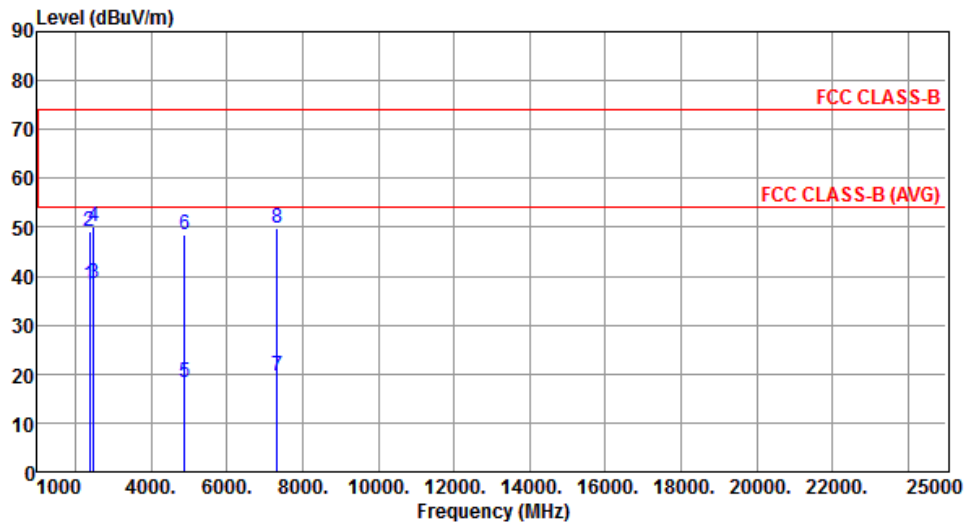


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.18	54.00	-15.82	39.28	-1.10	Average	102	240
2	2390.00	49.19	74.00	-24.81	50.29	-1.10	Peak	102	240
3	2483.50	38.50	54.00	-15.50	39.11	-0.61	Average	102	240
4	2483.50	50.18	74.00	-23.82	50.79	-0.61	Peak	102	240
5	4882.00	18.30	54.00	-35.70	12.86	5.44	Average	114	142
6	4882.00	48.40	74.00	-25.60	42.96	5.44	Peak	114	142
7	7323.00	19.68	54.00	-34.32	9.40	10.28	Average	120	250
8	7323.00	49.78	74.00	-24.22	39.50	10.28	Peak	120	250

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	2

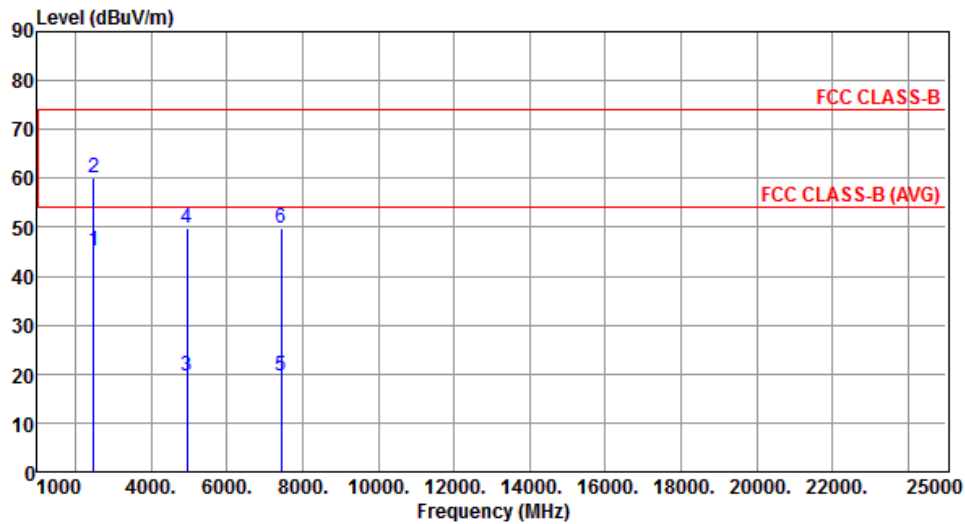


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	45.30	54.00	-8.70	45.91	-0.61	Average	113	180
2	2483.50	60.05	74.00	-13.95	60.66	-0.61	Peak	113	180
3	4960.00	19.59	54.00	-34.41	13.97	5.62	Average	120	15
4	4960.00	49.69	74.00	-24.31	44.07	5.62	Peak	120	15
5	7440.00	19.69	54.00	-34.31	9.13	10.56	Average	162	170
6	7440.00	49.79	74.00	-24.21	39.23	10.56	Peak	162	170

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	2

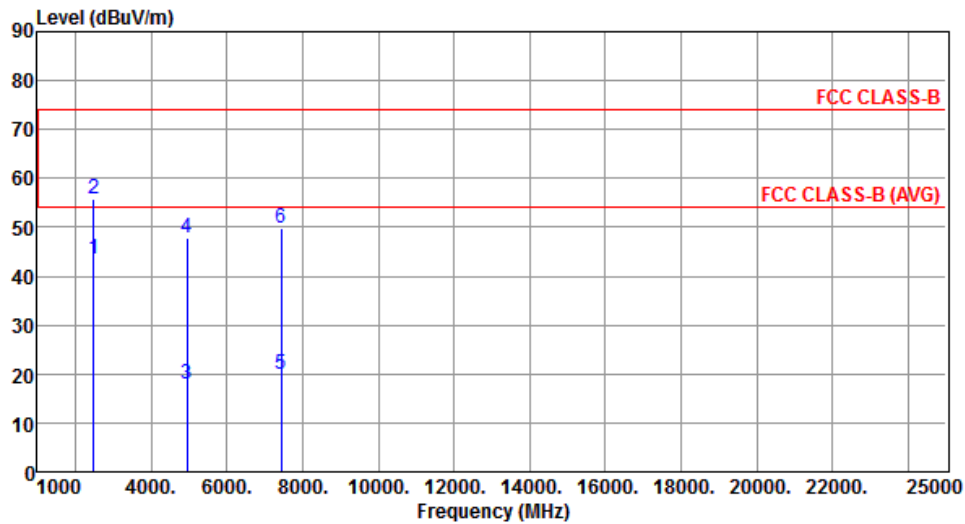

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.39	54.00	-10.61	44.00	-0.61	Average	102	235
2	2483.50	55.93	74.00	-18.07	56.54	-0.61	Peak	102	235
3	4960.00	17.80	54.00	-36.20	12.18	5.62	Average	130	140
4	4960.00	47.90	74.00	-26.10	42.28	5.62	Peak	130	140
5	7440.00	19.81	54.00	-34.19	9.25	10.56	Average	152	143
6	7440.00	49.91	74.00	-24.09	39.35	10.56	Peak	152	143


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

3.2.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK


Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	2

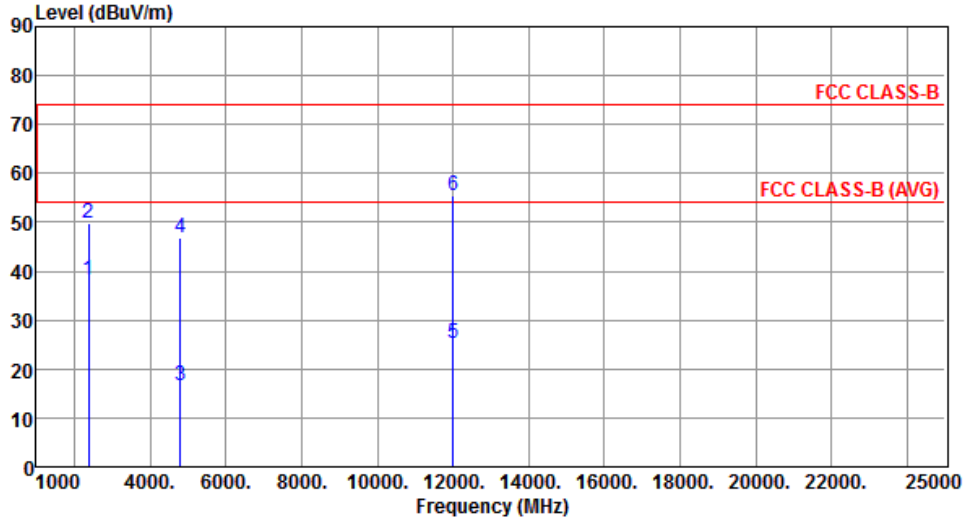

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.10	54.00	-15.90	39.20	-1.10	Average	100	175
2	2390.00	49.82	74.00	-24.18	50.92	-1.10	Peak	100	175
3	4804.00	16.74	54.00	-37.26	11.49	5.25	Average	100	12
4	4804.00	46.84	74.00	-27.16	41.59	5.25	Peak	100	12
5	12010.00	25.21	54.00	-28.79	10.14	15.07	Average	100	53
6	12010.00	55.31	74.00	-18.69	40.24	15.07	Peak	100	53

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	2

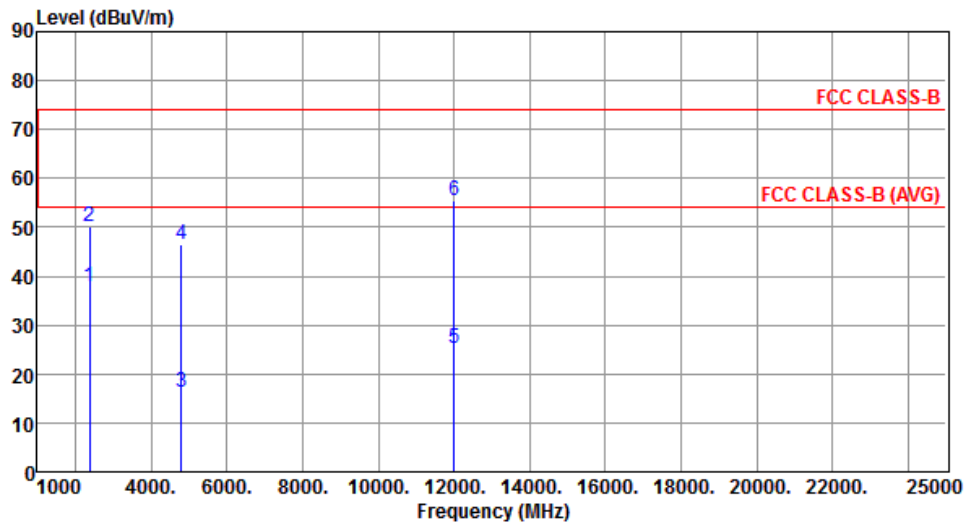


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.91	54.00	-16.09	39.01	-1.10	Average	100	252
2	2390.00	50.13	74.00	-23.87	51.23	-1.10	Peak	100	252
3	4804.00	16.41	54.00	-37.59	11.16	5.25	Average	105	262
4	4804.00	46.51	74.00	-27.49	41.26	5.25	Peak	105	262
5	12010.00	25.36	54.00	-28.64	10.29	15.07	Average	100	18
6	12010.00	55.46	74.00	-18.54	40.39	15.07	Peak	100	18

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	2

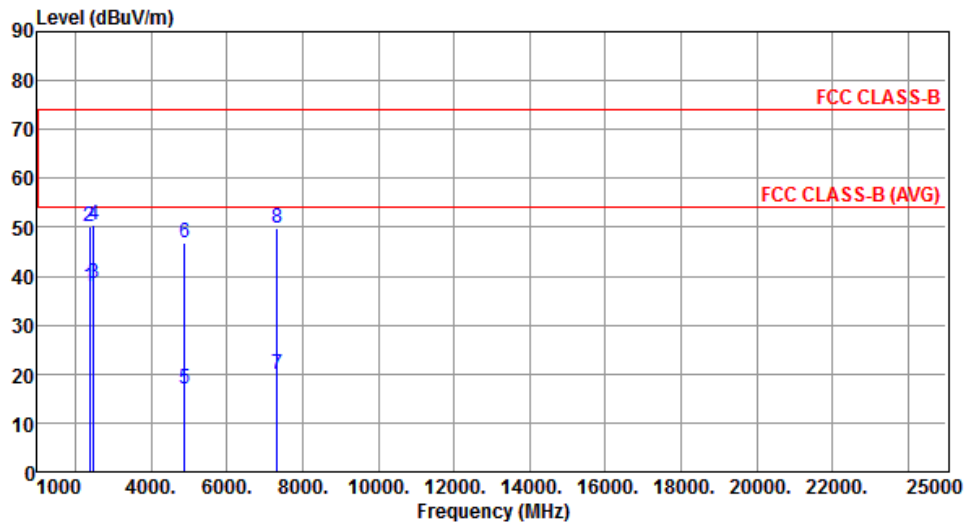


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.01	54.00	-15.99	39.11	-1.10	Average	100	176
2	2390.00	50.16	74.00	-23.84	51.26	-1.10	Peak	100	176
3	2483.50	38.60	54.00	-15.40	39.21	-0.61	Average	100	176
4	2483.50	50.51	74.00	-23.49	51.12	-0.61	Peak	100	176
5	4882.00	16.80	54.00	-37.20	11.36	5.44	Average	100	18
6	4882.00	46.90	74.00	-27.10	41.46	5.44	Peak	100	18
7	7323.00	19.77	54.00	-34.23	9.49	10.28	Average	110	210
8	7323.00	49.87	74.00	-24.13	39.59	10.28	Peak	110	210

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	2

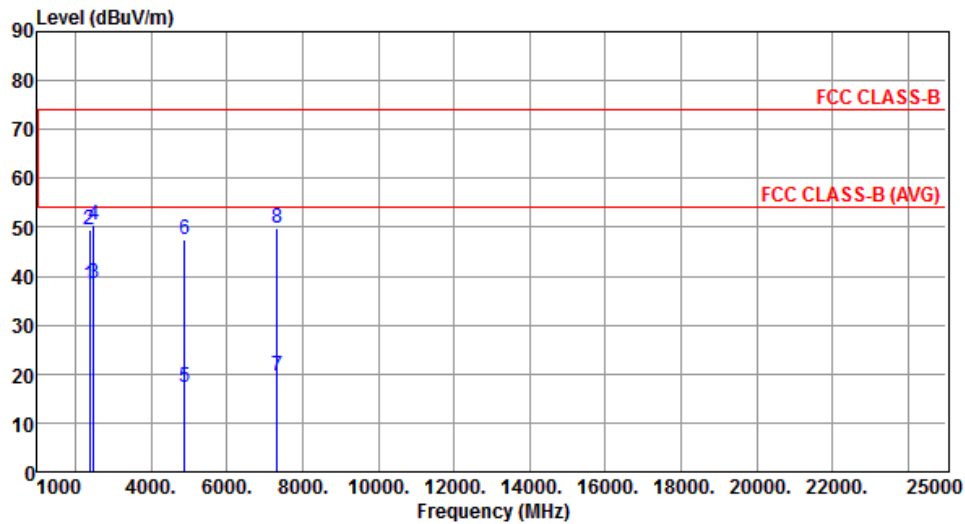


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.04	54.00	-15.96	39.14	-1.10	Average	100	240
2	2390.00	49.62	74.00	-24.38	50.72	-1.10	Peak	100	240
3	2483.50	38.38	54.00	-15.62	38.99	-0.61	Average	100	240
4	2483.50	50.34	74.00	-23.66	50.95	-0.61	Peak	100	240
5	4882.00	17.39	54.00	-36.61	11.95	5.44	Average	112	141
6	4882.00	47.49	74.00	-26.51	42.05	5.44	Peak	112	141
7	7323.00	19.56	54.00	-34.44	9.28	10.28	Average	115	249
8	7323.00	49.66	74.00	-24.34	39.38	10.28	Peak	115	249

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	2

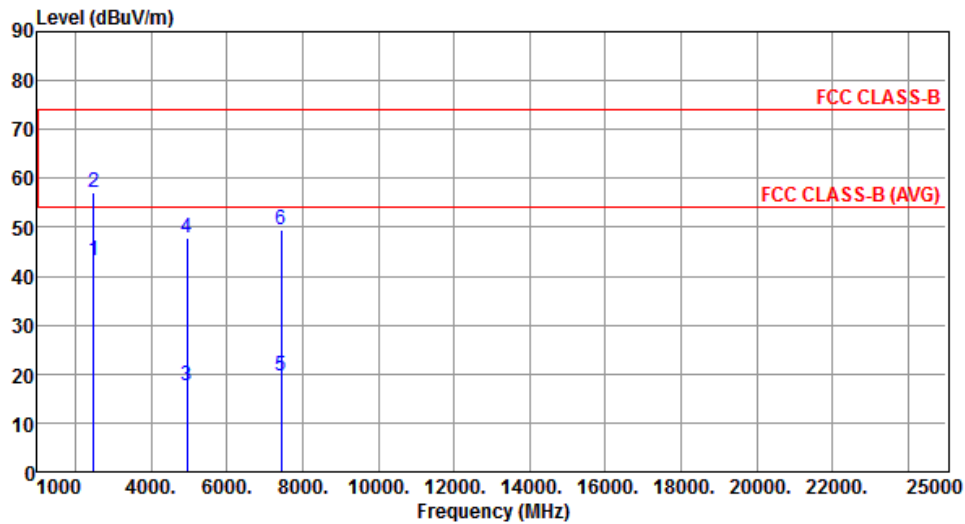


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.12	54.00	-10.88	43.73	-0.61	Average	110	179
2	2483.50	57.19	74.00	-16.81	57.80	-0.61	Peak	110	179
3	4960.00	17.76	54.00	-36.24	12.14	5.62	Average	121	17
4	4960.00	47.86	74.00	-26.14	42.24	5.62	Peak	121	17
5	7440.00	19.51	54.00	-34.49	8.95	10.56	Average	160	168
6	7440.00	49.61	74.00	-24.39	39.05	10.56	Peak	160	168

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	2

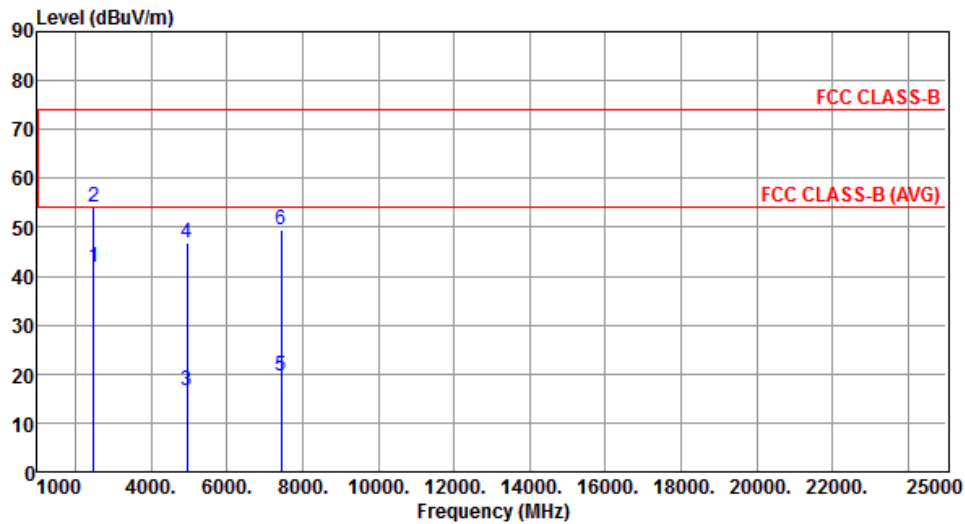

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	41.93	54.00	-12.07	42.54	-0.61	Average	100	234
2	2483.50	54.20	74.00	-19.80	54.81	-0.61	Peak	100	234
3	4960.00	16.71	54.00	-37.29	11.09	5.62	Average	128	138
4	4960.00	46.81	74.00	-27.19	41.19	5.62	Peak	128	138
5	7440.00	19.48	54.00	-34.52	8.92	10.56	Average	150	142
6	7440.00	49.58	74.00	-24.42	39.02	10.56	Peak	150	142

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Test Configuration 3: Isolated Magnetic Dipole antenna

3.2.10 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

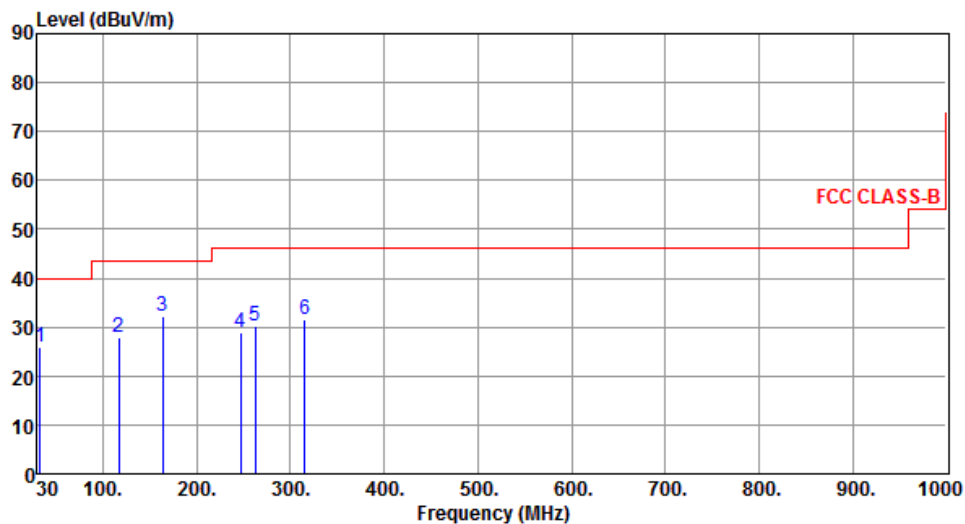

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	32.91	25.93	40.00	-14.07	39.90	-13.97	Peak	---	---
2	117.30	28.01	43.50	-15.49	43.87	-15.86	Peak	---	---
3	163.86	32.19	43.50	-11.31	45.71	-13.52	Peak	---	---
4	247.28	28.82	46.00	-17.18	43.40	-14.58	Peak	---	---
5	262.80	30.38	46.00	-15.62	44.43	-14.05	Peak	---	---
6	315.18	31.53	46.00	-14.47	43.94	-12.41	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

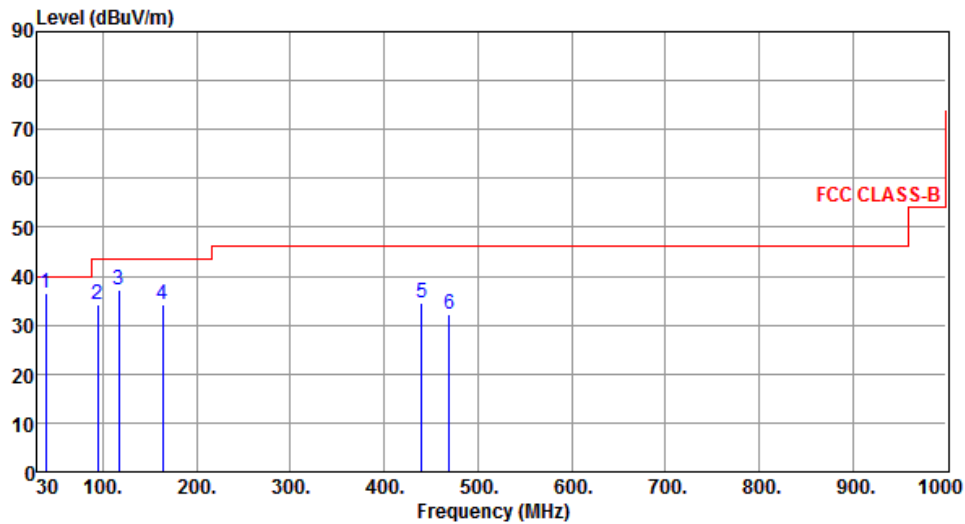

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.73	36.67	40.00	-3.33	50.13	-13.46	QP	100	12
2	94.02	34.24	43.50	-9.26	53.29	-19.05	Peak	---	---
3	117.30	37.23	43.50	-6.27	53.09	-15.86	Peak	---	---
4	163.86	34.12	43.50	-9.38	47.64	-13.52	Peak	---	---
5	440.31	34.38	46.00	-11.62	43.45	-9.07	Peak	---	---
6	469.41	32.23	46.00	-13.77	40.69	-8.46	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK


Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

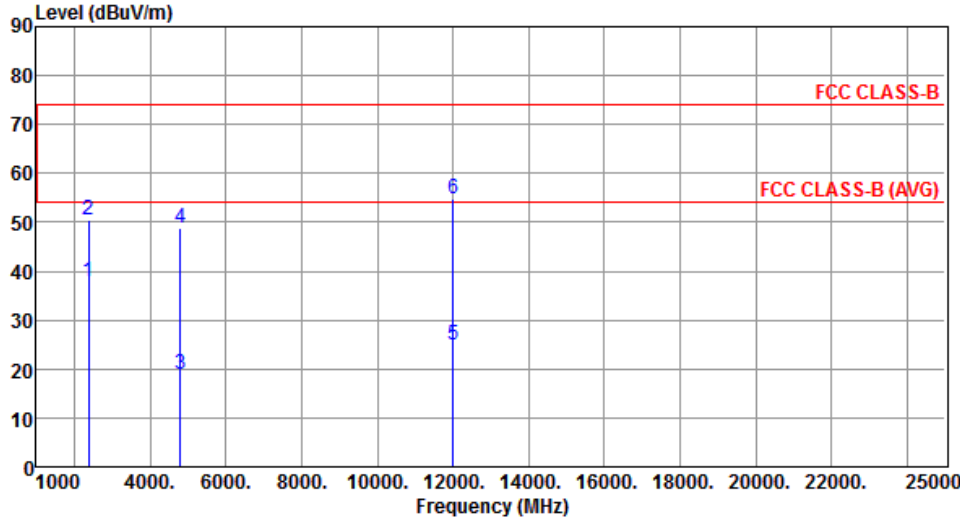

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.98	54.00	-16.02	39.08	-1.10	Average	190	28
2	2390.00	50.38	74.00	-23.62	51.48	-1.10	Peak	190	28
3	4804.00	18.84	54.00	-35.16	13.59	5.25	Average	100	6
4	4804.00	48.94	74.00	-25.06	43.69	5.25	Peak	100	6
5	12010.00	24.84	54.00	-29.16	9.77	15.07	Average	105	141
6	12010.00	54.94	74.00	-19.06	39.87	15.07	Peak	105	141

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	3

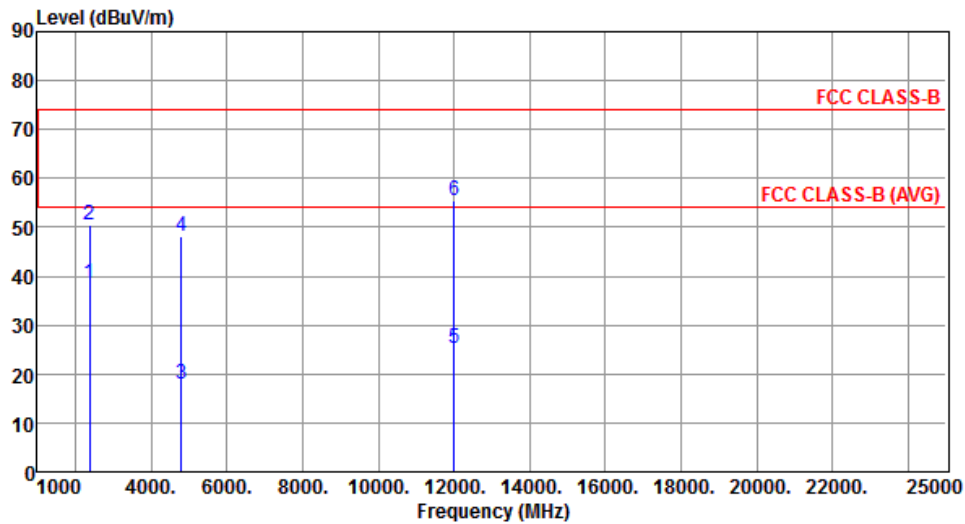


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.49	54.00	-15.51	39.59	-1.10	Average	150	109
2	2390.00	50.54	74.00	-23.46	51.64	-1.10	Peak	150	109
3	4804.00	18.08	54.00	-35.92	12.83	5.25	Average	110	160
4	4804.00	48.18	74.00	-25.82	42.93	5.25	Peak	110	160
5	12010.00	25.40	54.00	-28.60	10.33	15.07	Average	155	179
6	12010.00	55.50	74.00	-18.50	40.43	15.07	Peak	155	179

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

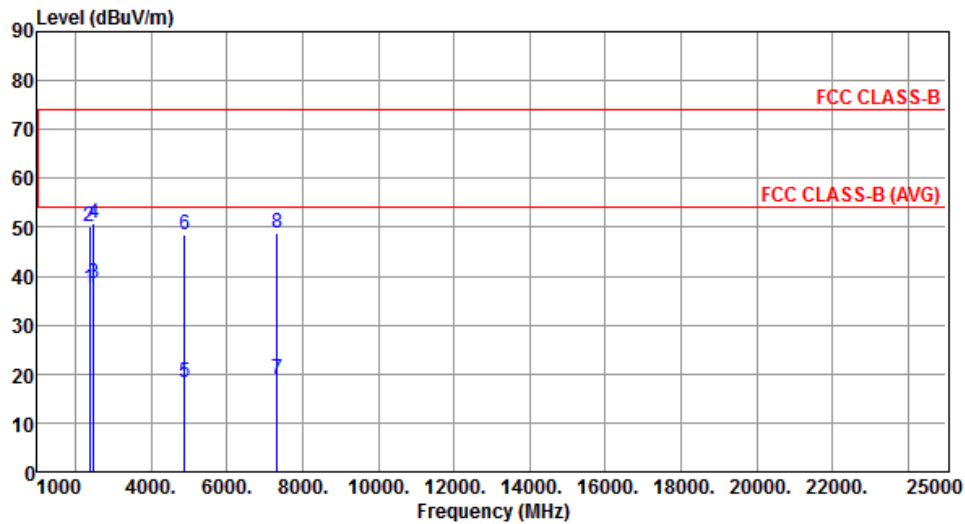


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.62	54.00	-16.38	38.72	-1.10	Average	192	32
2	2390.00	50.21	74.00	-23.79	51.31	-1.10	Peak	192	32
3	2483.50	38.38	54.00	-15.62	38.99	-0.61	Average	192	32
4	2483.50	50.68	74.00	-23.32	51.29	-0.61	Peak	192	32
5	4882.00	18.24	54.00	-35.76	12.80	5.44	Average	100	5
6	4882.00	48.34	74.00	-25.66	42.90	5.44	Peak	100	5
7	7323.00	18.85	54.00	-35.15	8.57	10.28	Average	122	41
8	7323.00	48.95	74.00	-25.05	38.67	10.28	Peak	122	41

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

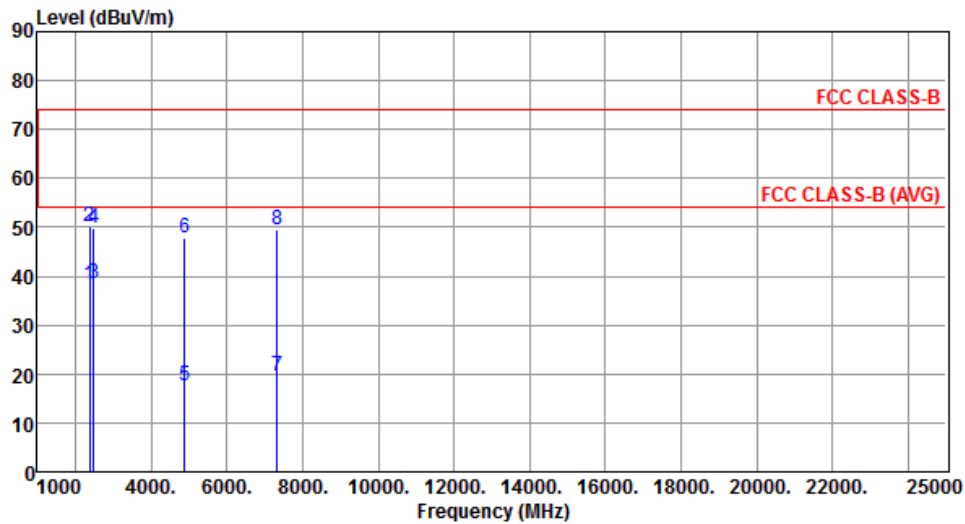


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.04	54.00	-15.96	39.14	-1.10	Average	154	110
2	2390.00	50.22	74.00	-23.78	51.32	-1.10	Peak	154	110
3	2483.50	38.39	54.00	-15.61	39.00	-0.61	Average	154	110
4	2483.50	49.75	74.00	-24.25	50.36	-0.61	Peak	154	110
5	4882.00	17.70	54.00	-36.30	12.26	5.44	Average	110	261
6	4882.00	47.80	74.00	-26.20	42.36	5.44	Peak	110	261
7	7323.00	19.45	54.00	-34.55	9.17	10.28	Average	165	171
8	7323.00	49.55	74.00	-24.45	39.27	10.28	Peak	165	171

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

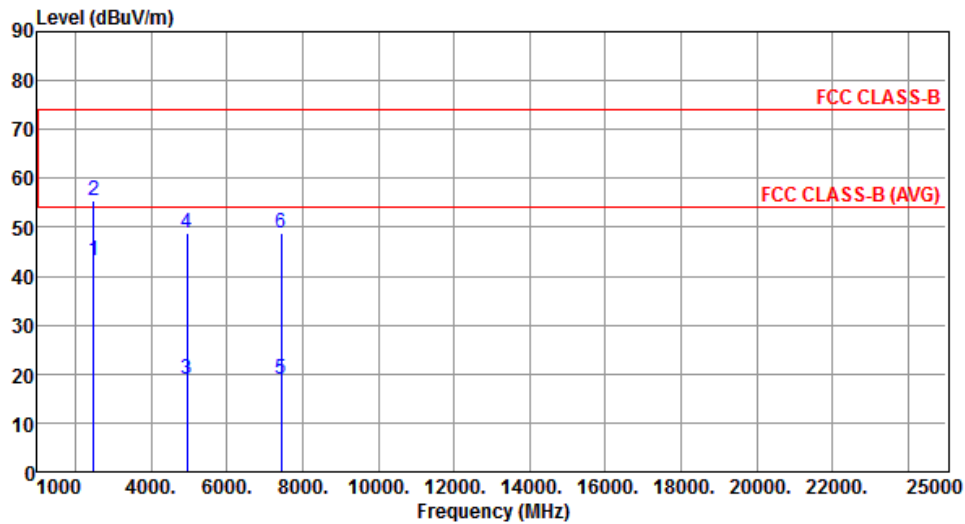


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.30	54.00	-10.70	43.91	-0.61	Average	115	265
2	2483.50	55.49	74.00	-18.51	56.10	-0.61	Peak	115	265
3	4960.00	18.80	54.00	-35.20	13.18	5.62	Average	105	9
4	4960.00	48.90	74.00	-25.10	43.28	5.62	Peak	105	9
5	7440.00	18.78	54.00	-35.22	8.22	10.56	Average	152	212
6	7440.00	48.88	74.00	-25.12	38.32	10.56	Peak	152	212

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

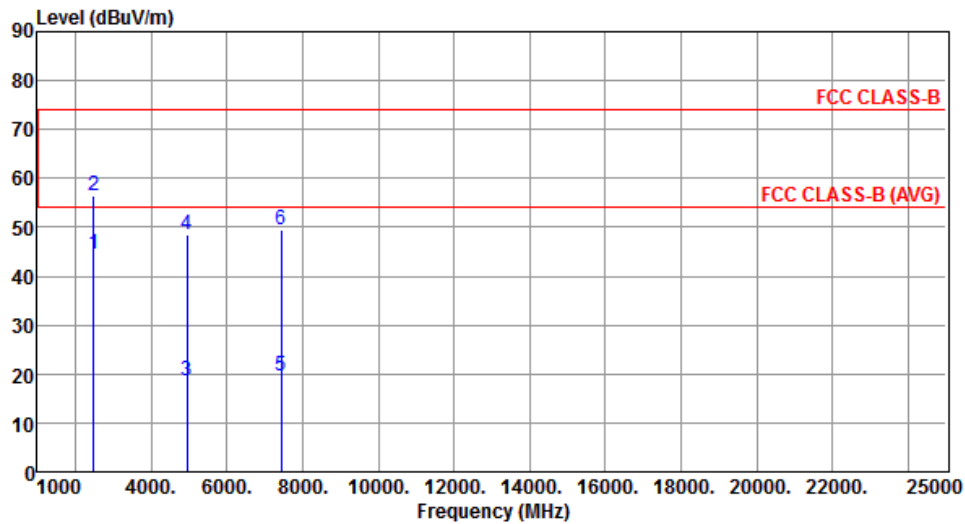

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	44.60	54.00	-9.40	45.21	-0.61	Average	160	104
2	2483.50	56.38	74.00	-17.62	56.99	-0.61	Peak	160	104
3	4960.00	18.46	54.00	-35.54	12.84	5.62	Average	109	261
4	4960.00	48.56	74.00	-25.44	42.94	5.62	Peak	109	261
5	7440.00	19.44	54.00	-34.56	8.88	10.56	Average	165	175
6	7440.00	49.54	74.00	-24.46	38.98	10.56	Peak	165	175


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

3.2.12 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK


Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

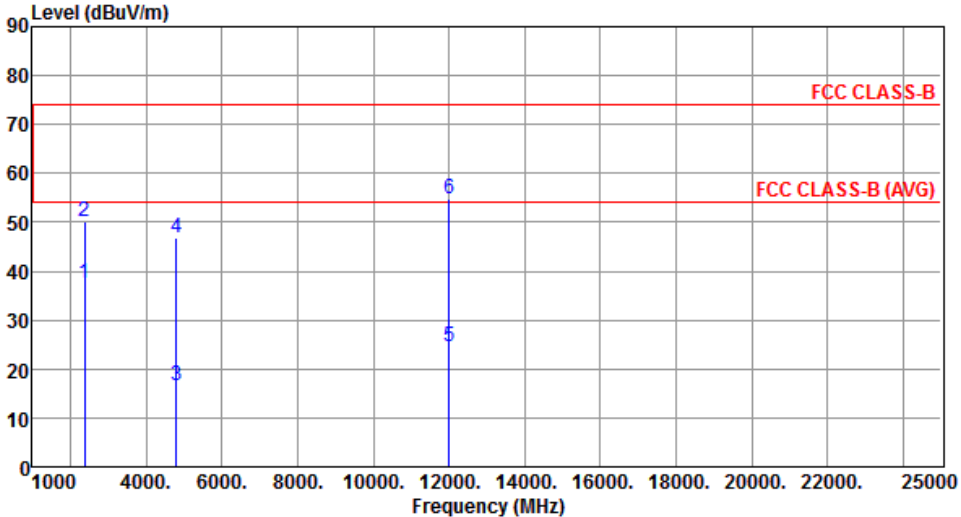

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.68	54.00	-16.32	38.78	-1.10	Average	185	29
2	2390.00	50.10	74.00	-23.90	51.20	-1.10	Peak	185	29
3	4804.00	16.64	54.00	-37.36	11.39	5.25	Average	100	5
4	4804.00	46.74	74.00	-27.26	41.49	5.25	Peak	100	5
5	12010.00	24.70	54.00	-29.30	9.63	15.07	Average	104	140
6	12010.00	54.80	74.00	-19.20	39.73	15.07	Peak	104	140

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	3

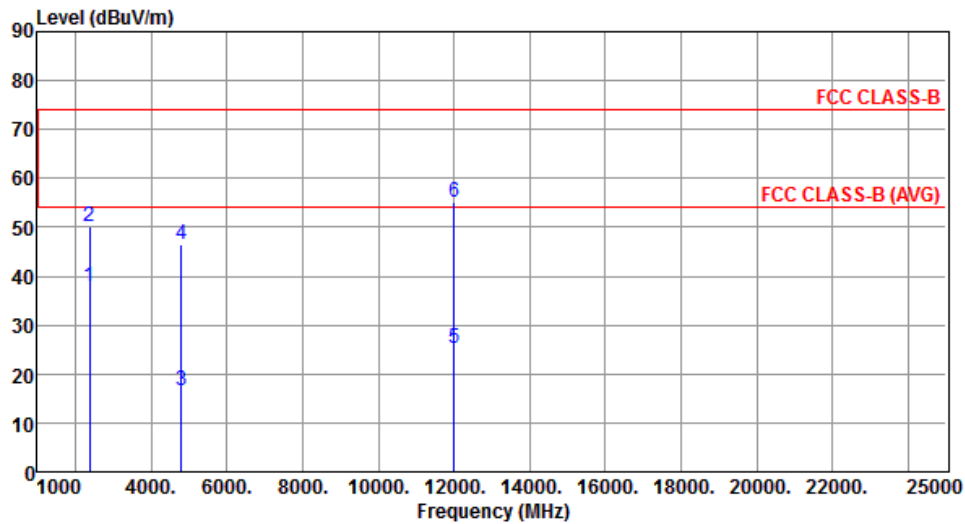


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.01	54.00	-15.99	39.11	-1.10	Average	144	110
2	2390.00	50.08	74.00	-23.92	51.18	-1.10	Peak	144	110
3	4804.00	16.55	54.00	-37.45	11.30	5.25	Average	108	161
4	4804.00	46.65	74.00	-27.35	41.40	5.25	Peak	108	161
5	12010.00	25.19	54.00	-28.81	10.12	15.07	Average	152	175
6	12010.00	55.29	74.00	-18.71	40.22	15.07	Peak	152	175

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

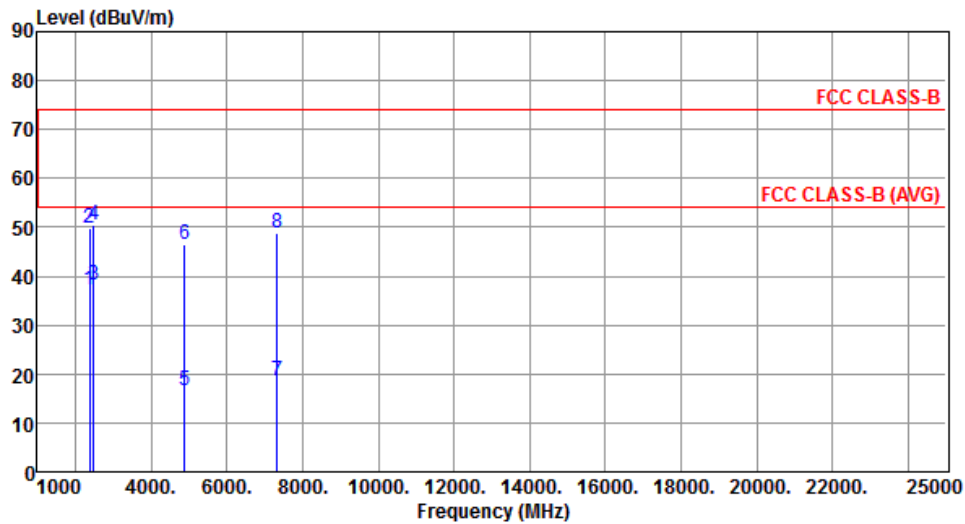


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.09	54.00	-16.91	38.19	-1.10	Average	190	30
2	2390.00	49.90	74.00	-24.10	51.00	-1.10	Peak	190	30
3	2483.50	38.09	54.00	-15.91	38.70	-0.61	Average	190	30
4	2483.50	50.34	74.00	-23.66	50.95	-0.61	Peak	190	30
5	4882.00	16.54	54.00	-37.46	11.10	5.44	Average	100	6
6	4882.00	46.64	74.00	-27.36	41.20	5.44	Peak	100	6
7	7323.00	18.74	54.00	-35.26	8.46	10.28	Average	120	40
8	7323.00	48.84	74.00	-25.16	38.56	10.28	Peak	120	40

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

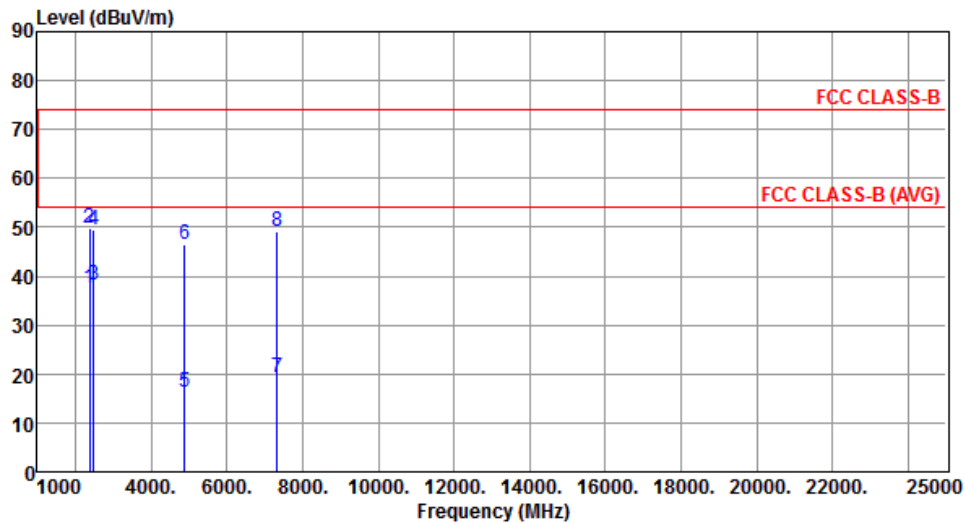


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.68	54.00	-16.32	38.78	-1.10	Average	152	111
2	2390.00	49.95	74.00	-24.05	51.05	-1.10	Peak	152	111
3	2483.50	38.35	54.00	-15.65	38.96	-0.61	Average	152	111
4	2483.50	49.48	74.00	-24.52	50.09	-0.61	Peak	152	111
5	4882.00	16.43	54.00	-37.57	10.99	5.44	Average	108	260
6	4882.00	46.53	74.00	-27.47	41.09	5.44	Peak	108	260
7	7323.00	19.19	54.00	-34.81	8.91	10.28	Average	162	170
8	7323.00	49.29	74.00	-24.71	39.01	10.28	Peak	162	170

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

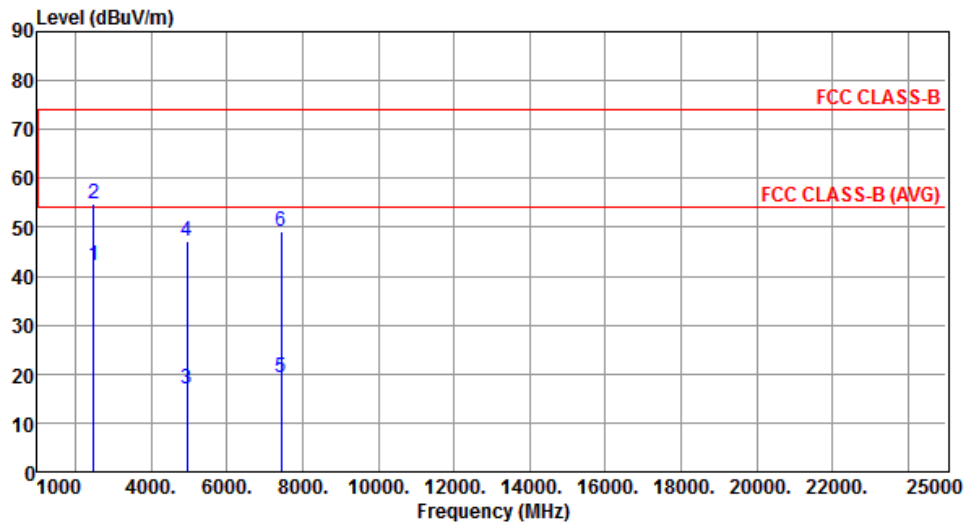


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	42.26	54.00	-11.74	42.87	-0.61	Average	112	264
2	2483.50	54.75	74.00	-19.25	55.36	-0.61	Peak	112	264
3	4960.00	17.06	54.00	-36.94	11.44	5.62	Average	102	7
4	4960.00	47.16	74.00	-26.84	41.54	5.62	Peak	102	7
5	7440.00	19.11	54.00	-34.89	8.55	10.56	Average	150	213
6	7440.00	49.21	74.00	-24.79	38.65	10.56	Peak	150	213

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

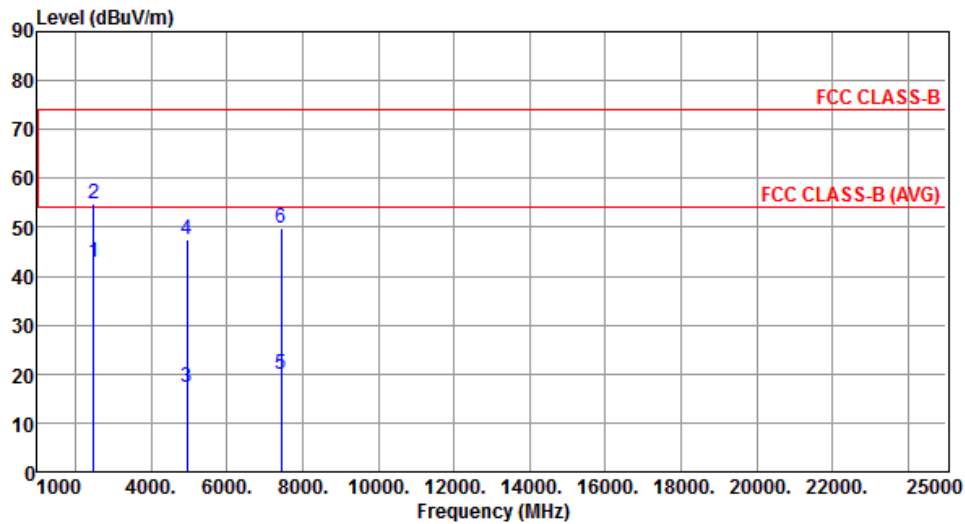

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.00	54.00	-11.00	43.61	-0.61	Average	158	105
2	2483.50	54.93	74.00	-19.07	55.54	-0.61	Peak	158	105
3	4960.00	17.25	54.00	-36.75	11.63	5.62	Average	108	260
4	4960.00	47.35	74.00	-26.65	41.73	5.62	Peak	108	260
5	7440.00	19.77	54.00	-34.23	9.21	10.56	Average	162	174
6	7440.00	49.87	74.00	-24.13	39.31	10.56	Peak	162	174

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement


1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.3.3 Test Setup




3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

GFSK

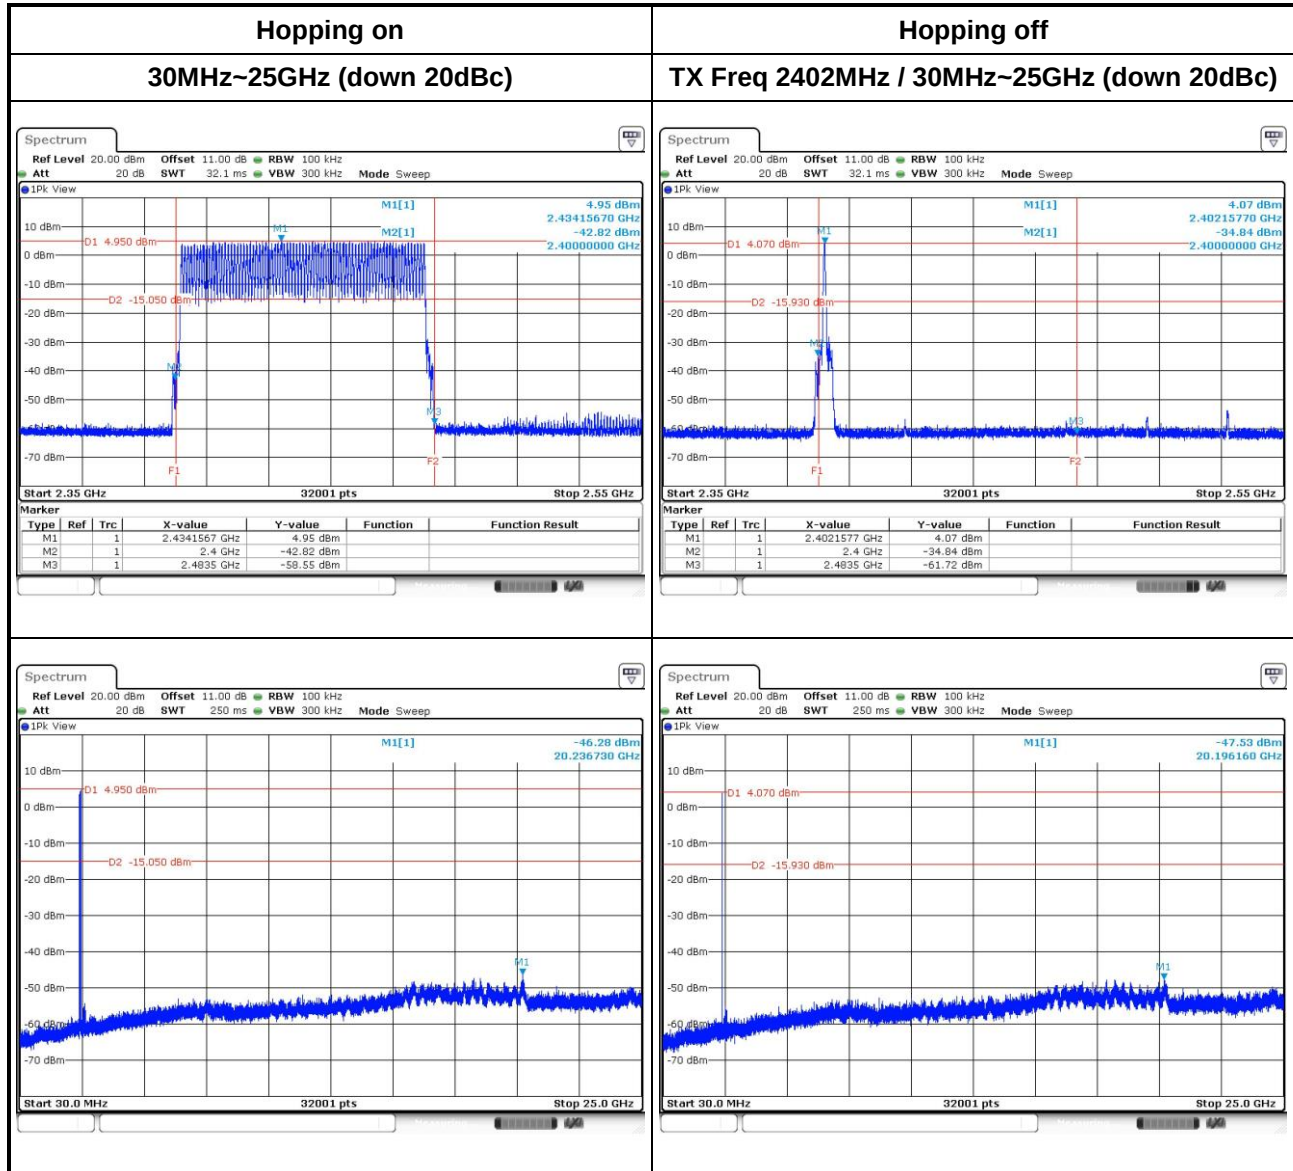




Hopping off

TX Freq 2441MHz / 30MHz~25GHz (down 20dBc)

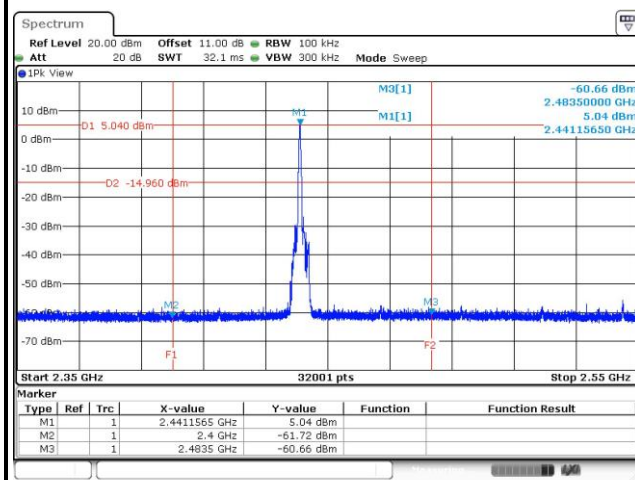


Hopping off

TX Freq 2480MHz / 30MHz~25GHz (down 20dBc)

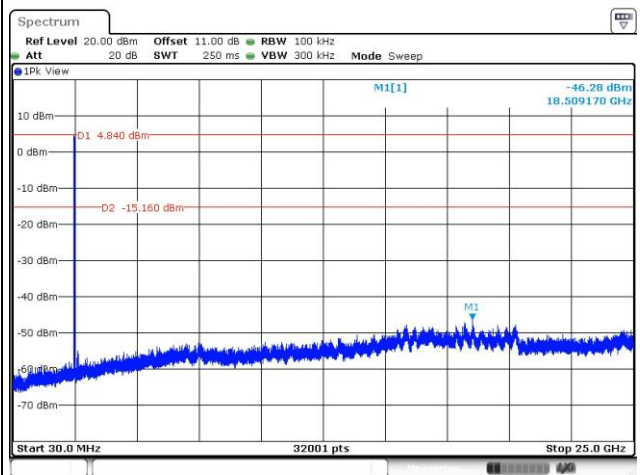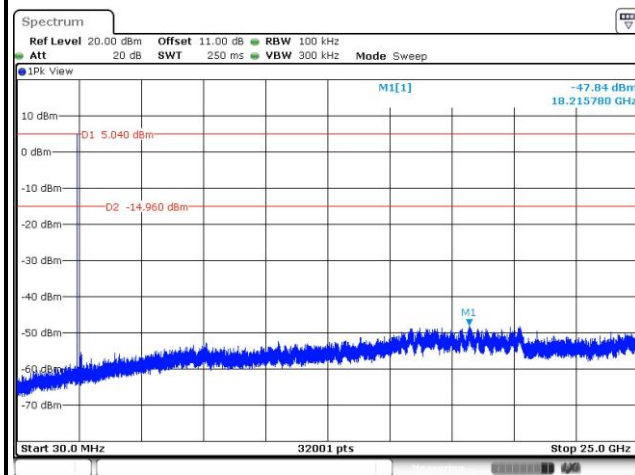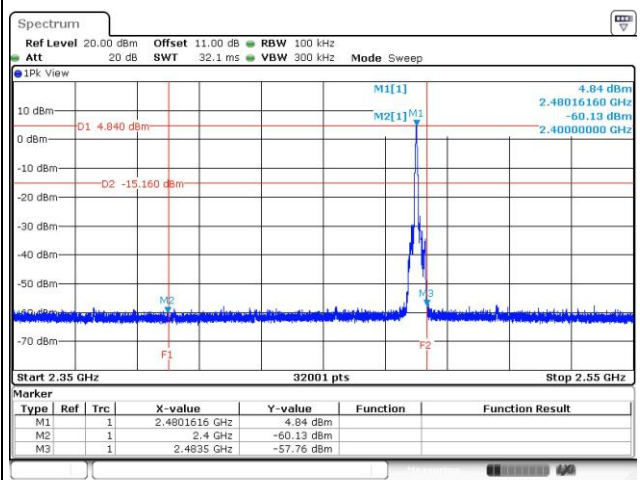


8DPSK

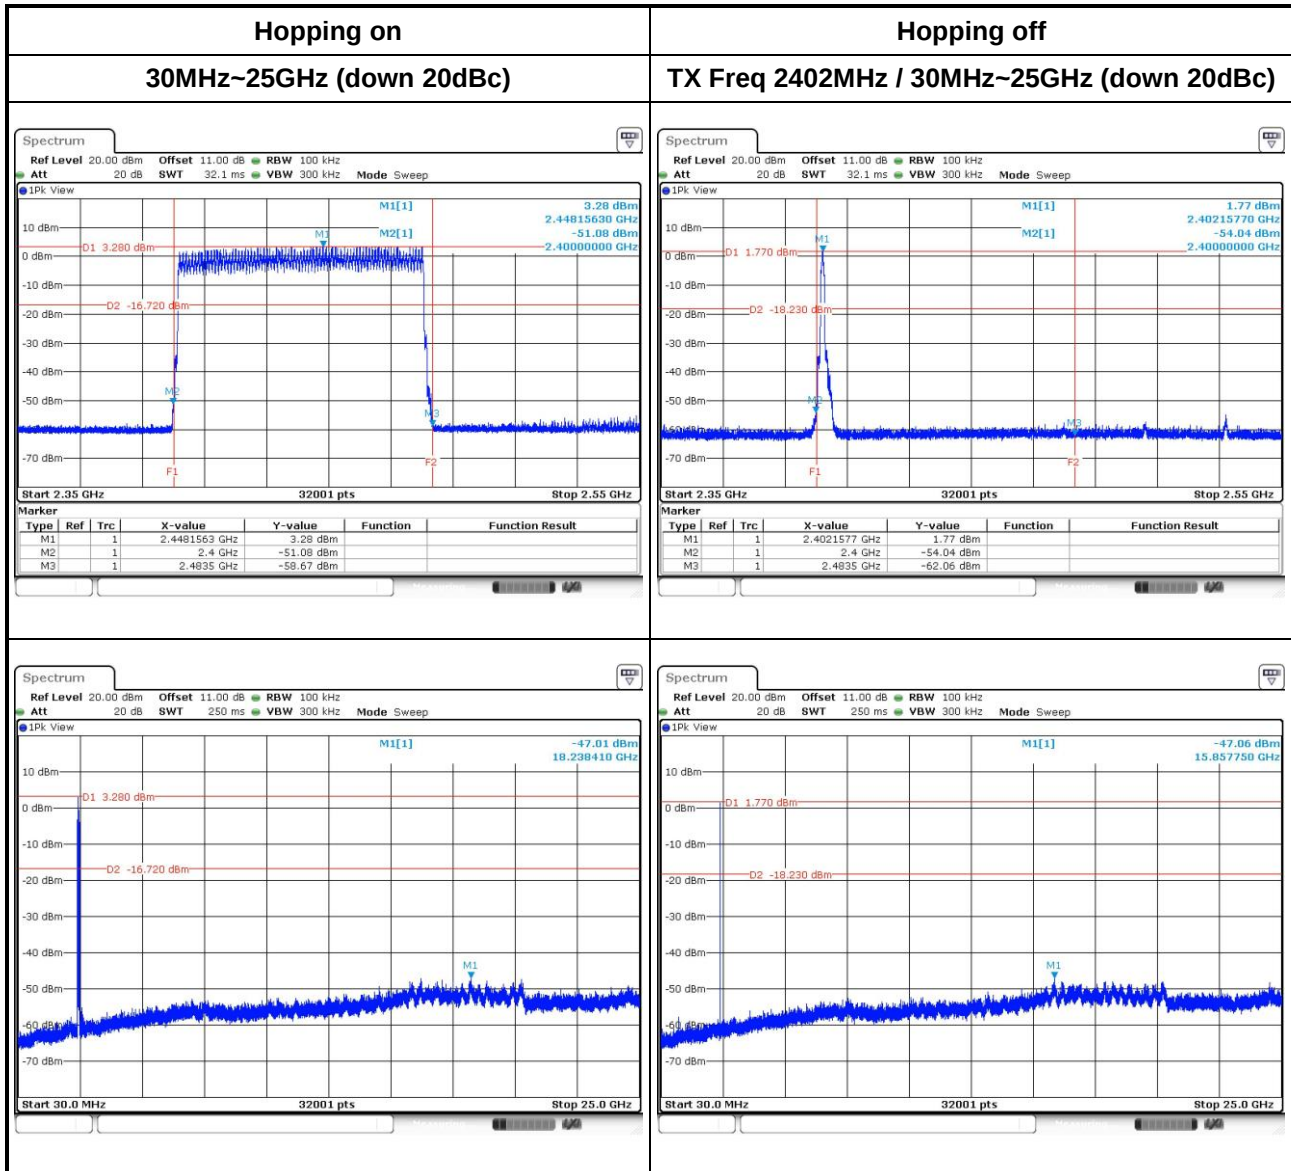




Hopping off

TX Freq 2441MHz / 30MHz~25GHz (down 20dBc)

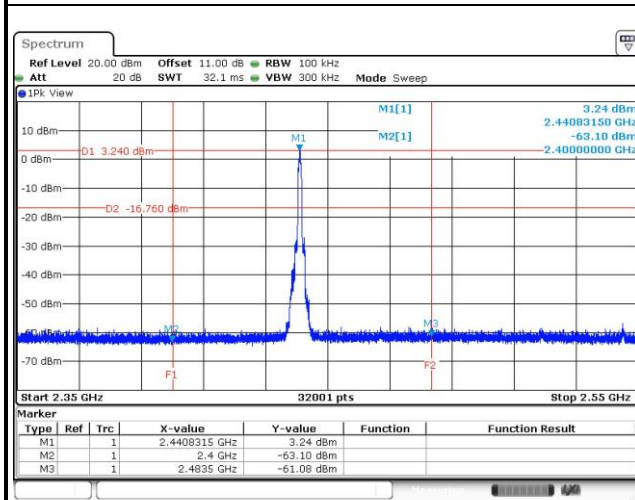

Hopping off

TX Freq 2480MHz / 30MHz~25GHz (down 20dBc)

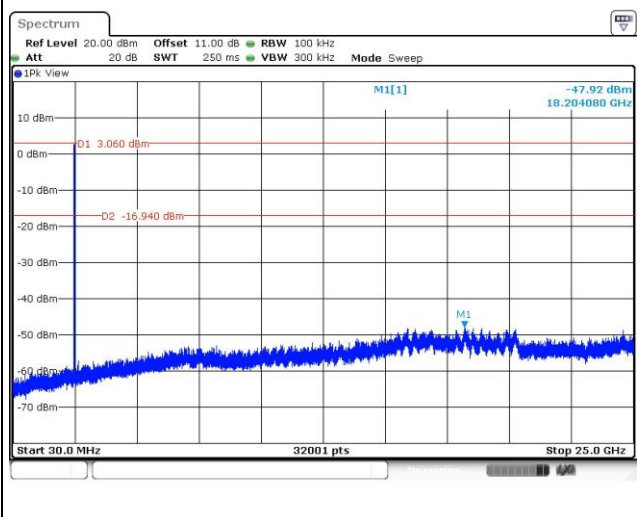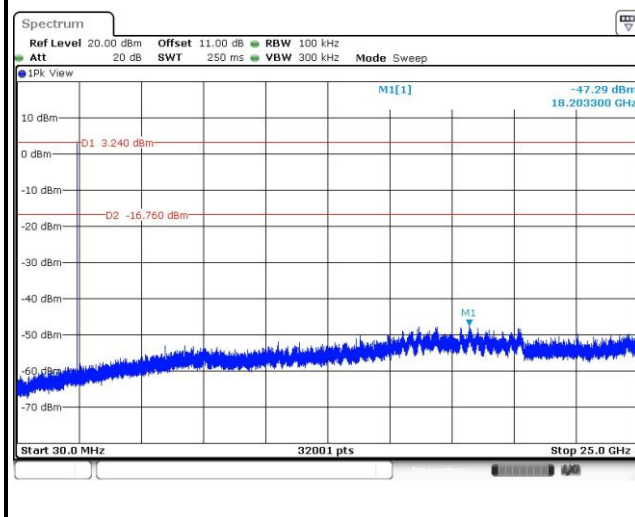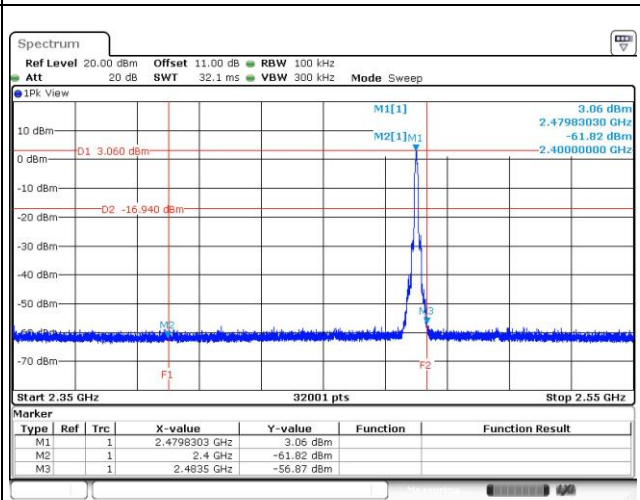

3.4 Conducted Output Power


3.4.1 Limit of Conducted Output Power

- ☐ 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- ☒ 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- ☐ 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup



3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	3.13	4.96	125
GFSK	2441	4.06	6.08	125
GFSK	2480	4.03	6.05	125
π/4 DQPSK	2402	2.20	3.43	125
π/4 DQPSK	2441	3.10	4.91	125
π/4 DQPSK	2480	2.99	4.76	125
8DPSK	2402	2.37	3.74	125
8DPSK	2441	3.27	5.14	125
8DPSK	2480	3.22	5.08	125

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)	Limit (mW)
GFSK	2402	2.98	4.74	---
GFSK	2441	3.86	5.87	---
GFSK	2480	3.82	5.82	---
π/4 DQPSK	2402	1.39	1.42	---
π/4 DQPSK	2441	2.02	3.05	---
π/4 DQPSK	2480	2.03	3.07	---
8DPSK	2402	1.38	1.40	---
8DPSK	2441	2.01	3.03	---
8DPSK	2480	2.02	3.05	---

Note: Average power is for reference only.

3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.5.3 Test Setup



3.5.4 Test Result of Number of Hopping Frequency

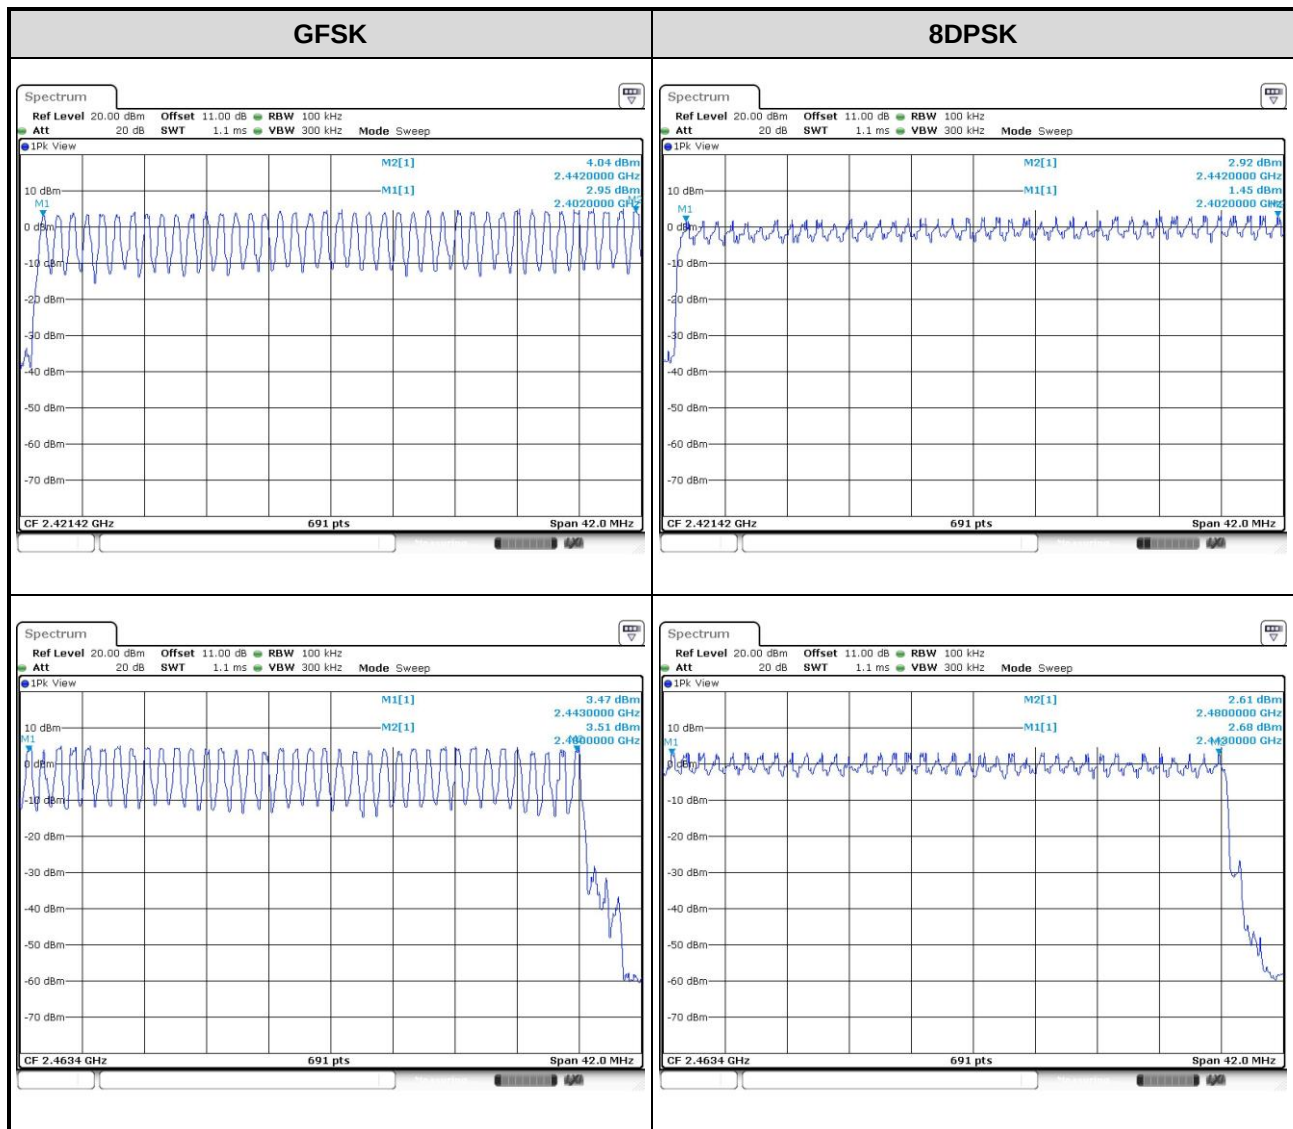

3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20 dB Bandwidth

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak, Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth


1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak, Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup



3.6.3 Test result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	0.965	0.879
GFSK	2441	0.952	0.872
GFSK	2480	0.952	0.873
8DPSK	2402	1.287	1.167
8DPSK	2441	1.278	1.180
8DPSK	2480	1.278	1.187

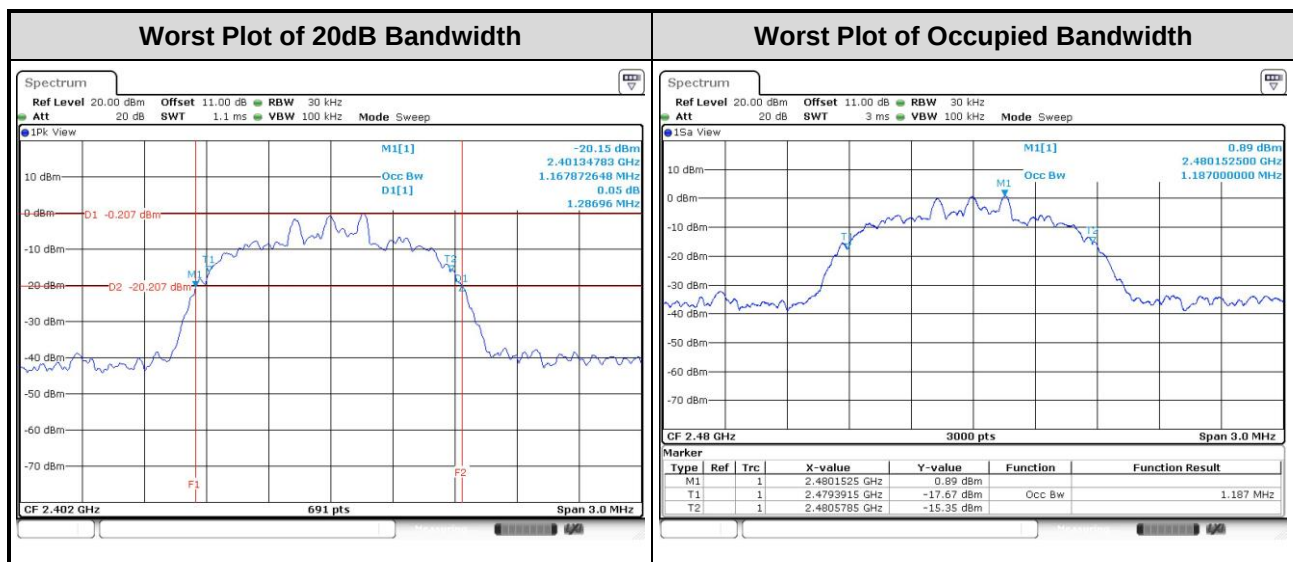

3.7 Channel Separation


3.7.1 Limit of Channel Separation

- ☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- ☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures


1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup



3.7.4 Test result of Channel Separation

Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	0.965	0.643
GFSK	2441	1.003	0.952	0.635
GFSK	2480	1.003	0.952	0.635
8DPSK	2402	1.003	1.287	0.858
8DPSK	2441	1.003	1.278	0.852
8DPSK	2480	1.003	1.278	0.852

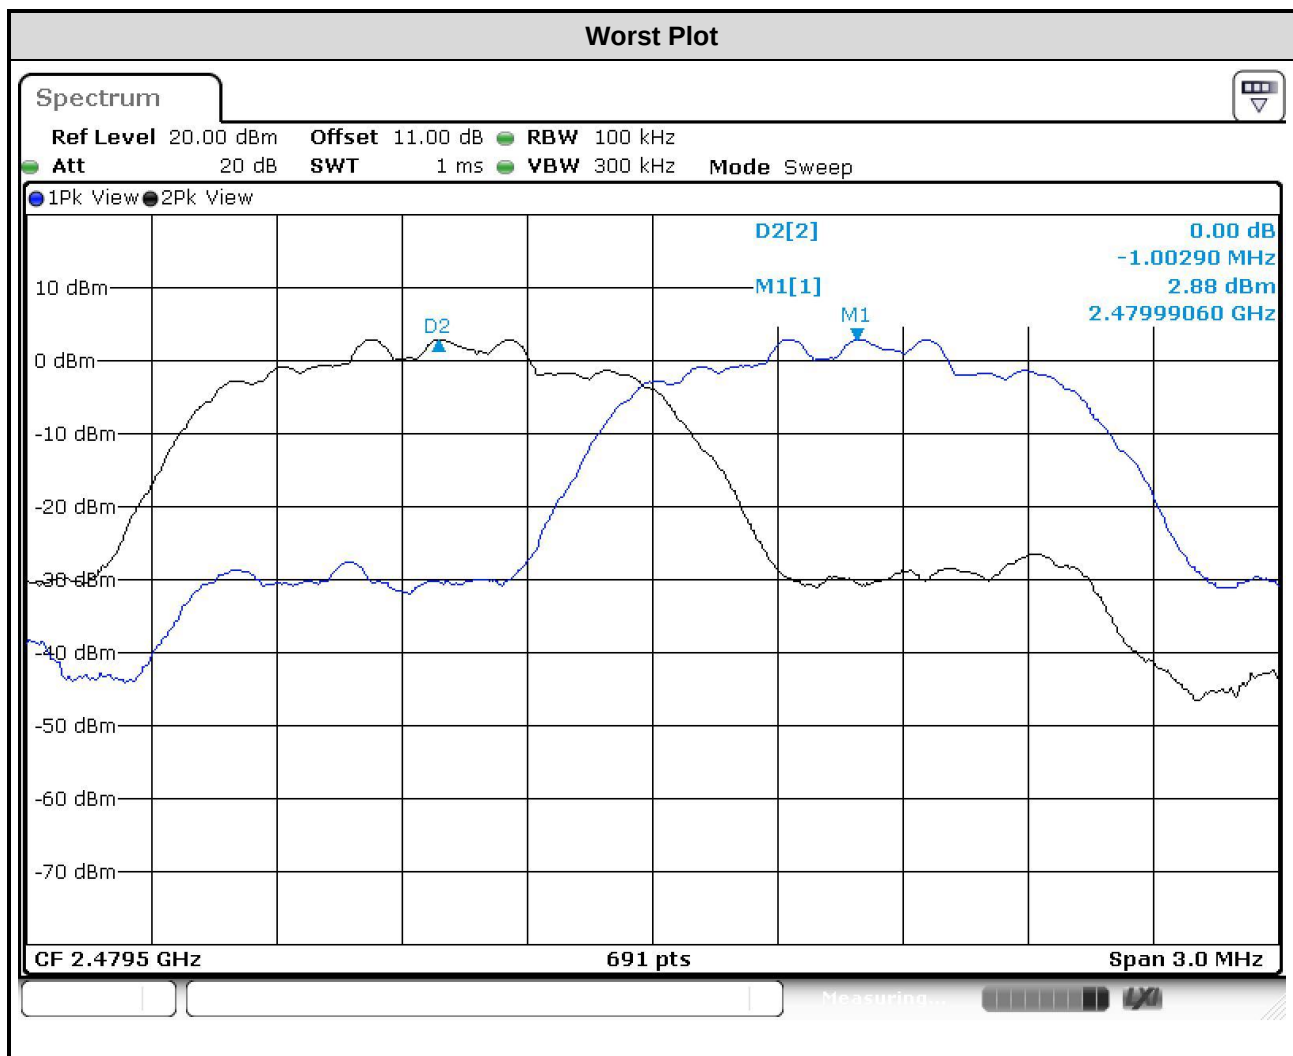

3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures


1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
5. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds


3.8.3 Test Setup



3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.43942	320	0.141	0.4
GFSK-DH3	2402	1.72348	160	0.276	0.4
GFSK-DH5	2402	2.94239	106.6	0.314	0.4
8DPSK-DH1	2402	0.44819	320	0.143	0.4
8DPSK-DH3	2402	1.71204	160	0.274	0.4
8DPSK-DH5	2402	2.98305	106.6	0.318	0.4

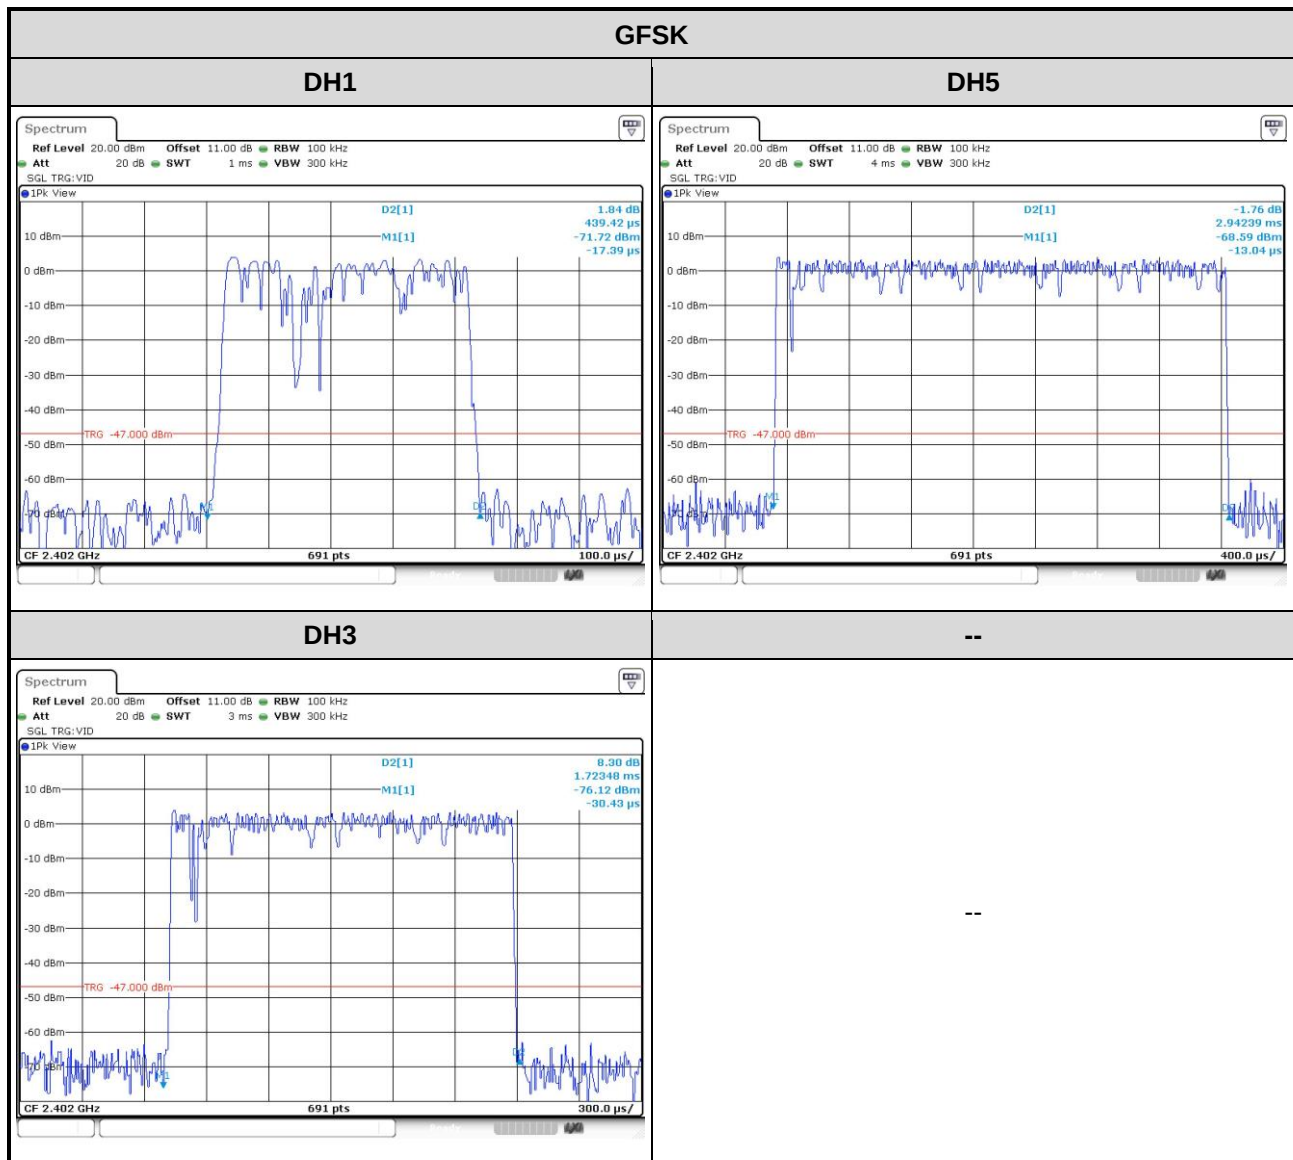

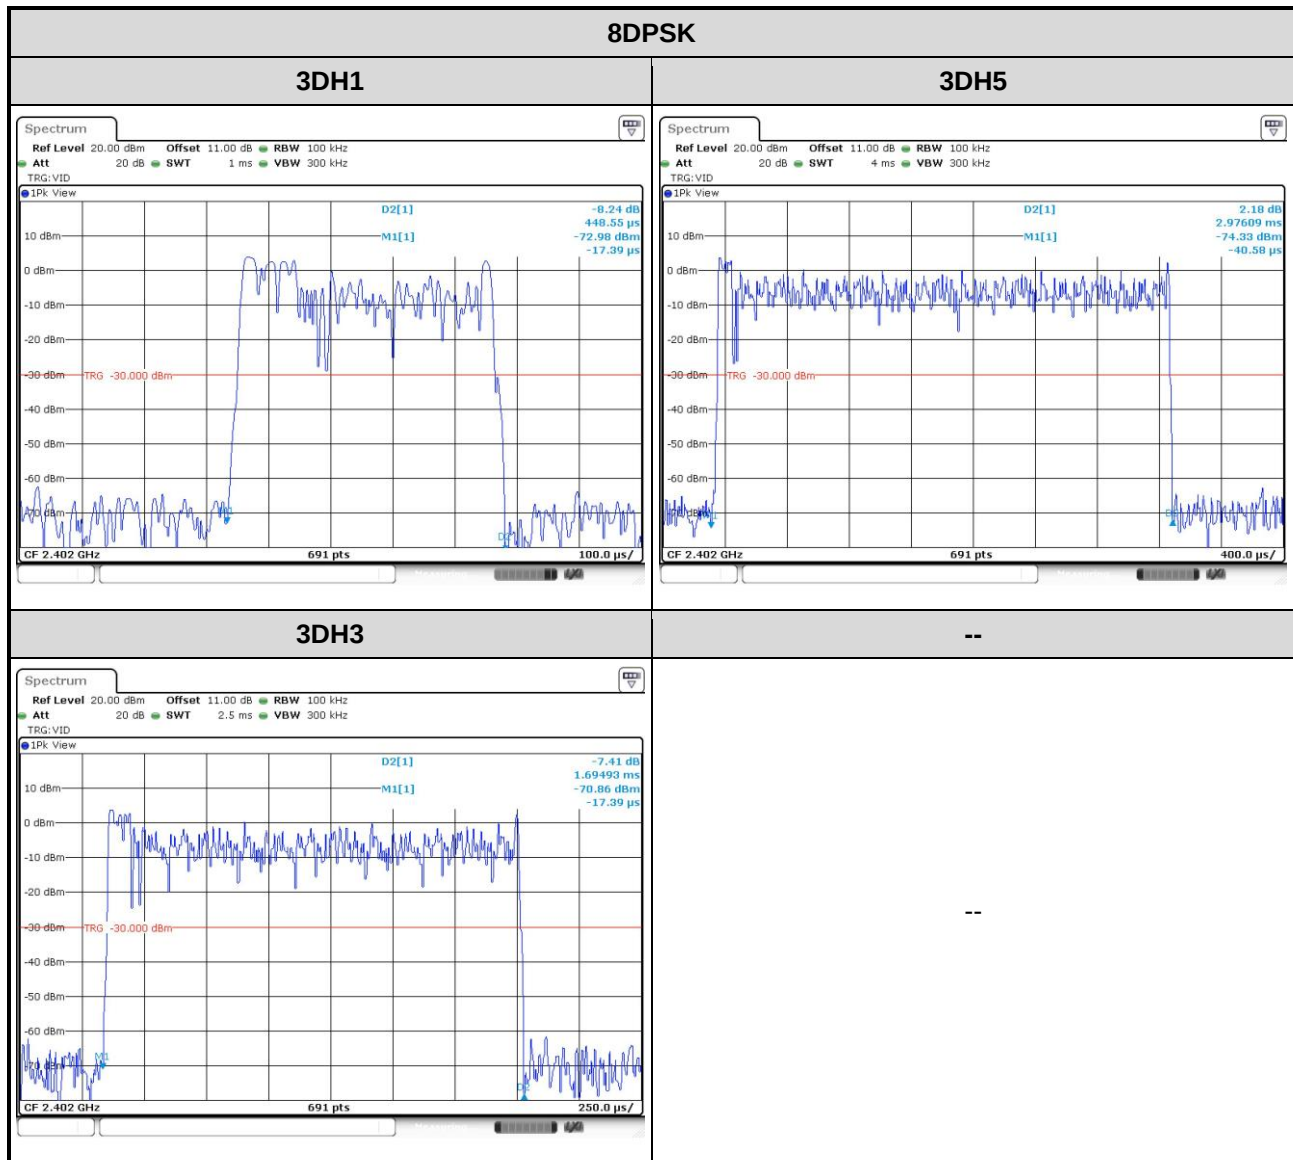

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==