

# IC Reassessment Test Report

**IC** : 6616A-SDCMSD40NBT  
**Equipment** : 802.11abgn (1X1) + Bluetooth (2.1) module  
**Model No.** : SDC-MSD40NBT  
**Brand Name** : Summit  
**Applicant** : Summit Data Communications, Inc.  
**Address** : 526 South Main Street Suite 805 Akron, OH  
44311  
**Standard** : RSS-210 Issue 8 December 2010  
**Received Date** : Feb. 26, 2015  
**Tested Date** : Mar. 31 ~ Apr. 28, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	The Equipment List .....	8
1.5	Test Standards .....	8
1.6	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Condition .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	Unwanted Emissions into Restricted Frequency Bands .....	14
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>18</b>

---

## Release Record

Report No.	Version	Description	Issued Date
CR522601AC	Rev. 01	Initial issue	May 26, 2015

---

## Summary of Test Results

IC Rules	Test Items	Measured	Result
8.8 of RSS-Gen	Conducted Emissions	[dBuV]: 0.568MHz 36.20 (Margin -9.80dB) - AV	Pass
A8.5 of RSS-210	Radiated Emissions	[dBuV/m at 3m]: 604.24MHz 37.88 (Margin -8.12dB) - PK	Pass

# 1 General Description

## 1.1 Information

This report is issued for IC reassessment for changing value of some resistances and capacitances of Non-RF part. In this report, conducted emission and radiated emission below 1GHz tests had been re-tested and only its data was presented in the following sections.

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	Cisco	AIR-ANT 4941	Dipole	RP-TNC plug	2
2	Radiall Larsen	R380.500.314	Dipole	RP-TNC plug	1.6
3	Laird	WRR2400- IP04-B	Dipole	IPEX U.FL	1.5

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
-------------------	------------------

### 1.1.4 Accessories

N/A

### 1.1.5 Support Units

Support Units		
No.	Equipment	Description
1	PDA	Brand Name: HP Model Name: HSTNH-L05C-BT
2	Adapter for PDA	Brand Name: N/A Model Name: 3A-041WE05 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.2A O/P: 5.0Vdc, 1.0A Power Line: 1.85m non-shielded cable w/o core

### 1.1.6 Channel List

Channel	Frequency(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

### 1.1.7 Test Tool

Test Tool	LRU, Version: 3.5.1.17
-----------	------------------------

### 1.1.8 Power Setting


Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	100%
11b	2437	100%
11b	2462	100%
11g	2412	100%
11g	2437	100%
11g	2462	100%
HT20	2412	100%
HT20	2437	100%
HT20	2462	100%

### 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	PDA	HP	HSTNH-L05C-BT	---	---
2	Testing board	---	---	---	---

Note: No.1 was supplied by applicant.

### 1.3 Test Setup Chart

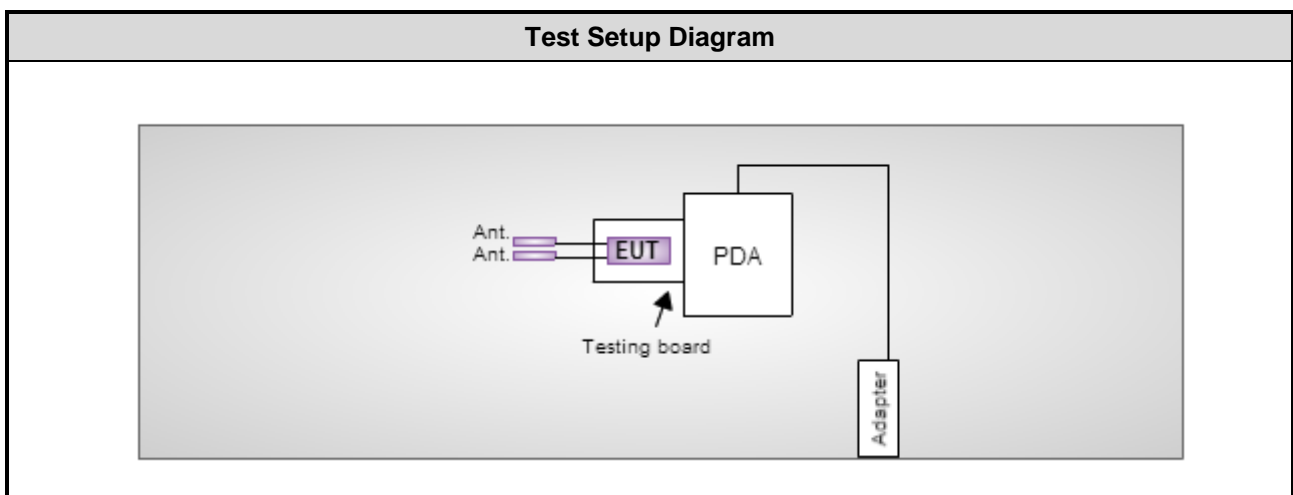

## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Test Date</b>	Mar. 31, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2014	Nov. 25, 2015
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 2 / (03CH02-WS)				
<b>Test Date</b>	Apr. 28, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015
Receiver	R&S	ESR3	101657	Jan. 15, 2015	Jan. 14, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Oct. 16, 2014	Oct. 15, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 14, 2014	Oct. 13, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Burgeon	BPA-530	100218	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Agilent	83017A	MY39501309	Sep. 29, 2014	Sep. 28, 2015
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 16, 2014	Dec. 15, 2015
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 16, 2014	Dec. 15, 2015
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 16, 2014	Dec. 15, 2015
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

RSS-210 Issue 8 December 2010

RSS-Gen Issue 4 November 2014

ANSI C63.10-2013

ANSI C63.4-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r02



## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.62 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 66%	Kevin Ma
Radiated Emissions	03CH02-WS	20°C / 71%	Warren Lee

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11b	2437	1 Mbps	---
Radiated Emissions $\leq 1$ GHz	11b	2437	1 Mbps	---

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.
2. 3 antennas are used for this device, the antenna with highest gain was selected for final testing.

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup




- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Line		


  

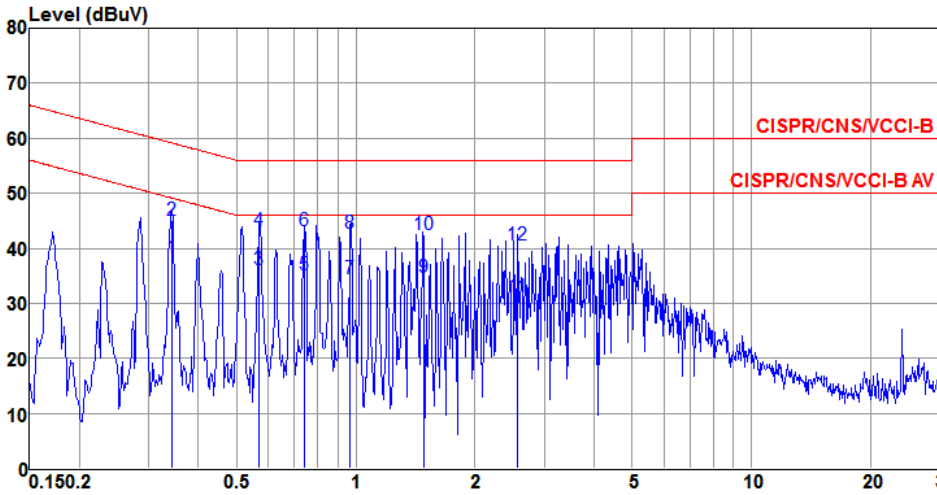

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.343	38.13	49.14	-11.01	37.82	0.20	0.11	Average
2	0.343	45.08	59.14	-14.06	44.77	0.20	0.11	QP
3*	0.568	36.20	46.00	-9.80	35.92	0.15	0.13	Average
4	0.568	43.29	56.00	-12.71	43.01	0.15	0.13	QP
5	0.740	35.07	46.00	-10.93	34.81	0.12	0.14	Average
6	0.740	43.11	56.00	-12.89	42.85	0.12	0.14	QP
7	0.969	34.57	46.00	-11.43	34.32	0.09	0.16	Average
8	0.969	42.64	56.00	-13.36	42.39	0.09	0.16	QP
9	1.481	34.62	46.00	-11.38	34.02	0.39	0.21	Average
10	1.481	42.37	56.00	-13.63	41.77	0.39	0.21	QP
11	2.566	31.16	46.00	-14.84	30.39	0.50	0.27	Average
12	2.566	40.62	56.00	-15.38	39.85	0.50	0.27	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Neutral		

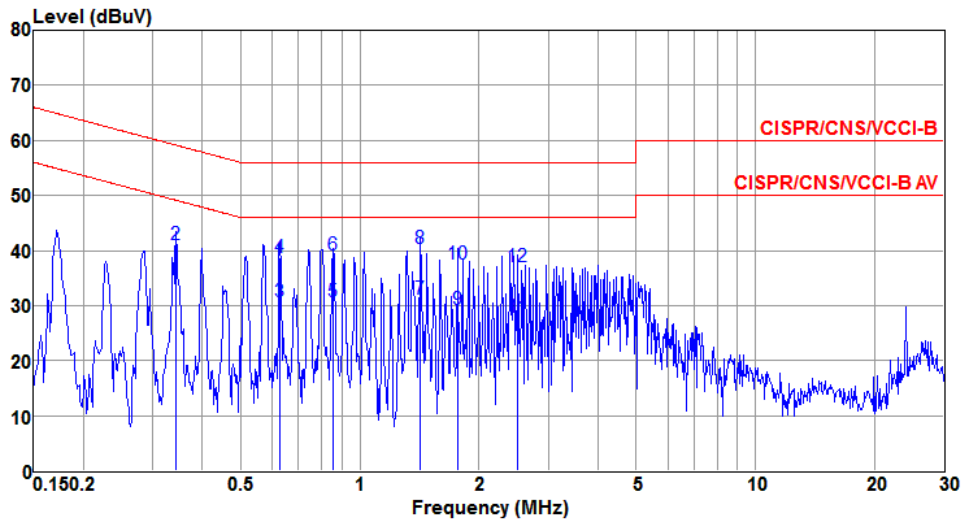

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1*	0.343	34.40	49.13	-14.73	34.14	0.15	0.11	Average
2	0.343	40.97	59.13	-18.16	40.71	0.15	0.11	QP
3	0.627	30.79	46.00	-15.21	30.46	0.20	0.13	Average
4	0.627	38.63	56.00	-17.37	38.30	0.20	0.13	QP
5	0.854	30.77	46.00	-15.23	30.37	0.25	0.15	Average
6	0.854	39.13	56.00	-16.87	38.73	0.25	0.15	QP
7	1.426	31.18	46.00	-14.82	30.74	0.24	0.20	Average
8	1.426	40.26	56.00	-15.74	39.82	0.24	0.20	QP
9	1.766	29.16	46.00	-16.84	28.70	0.23	0.23	Average
10	1.766	37.52	56.00	-18.48	37.06	0.23	0.23	QP
11	2.508	27.91	46.00	-18.09	27.26	0.39	0.26	Average
12	2.508	37.05	56.00	-18.95	36.40	0.39	0.26	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 Unwanted Emissions into Restricted Frequency Bands

### 3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


### 3.2.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.


### 3.2.3 Test Setup

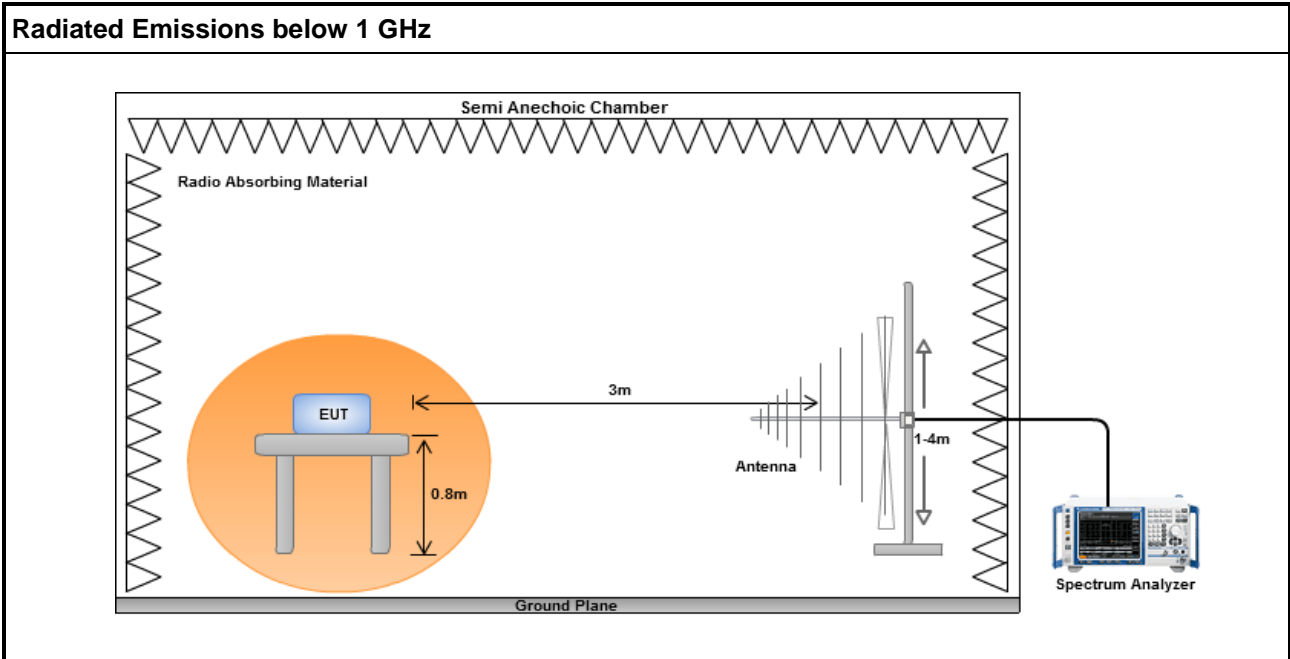

### 3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

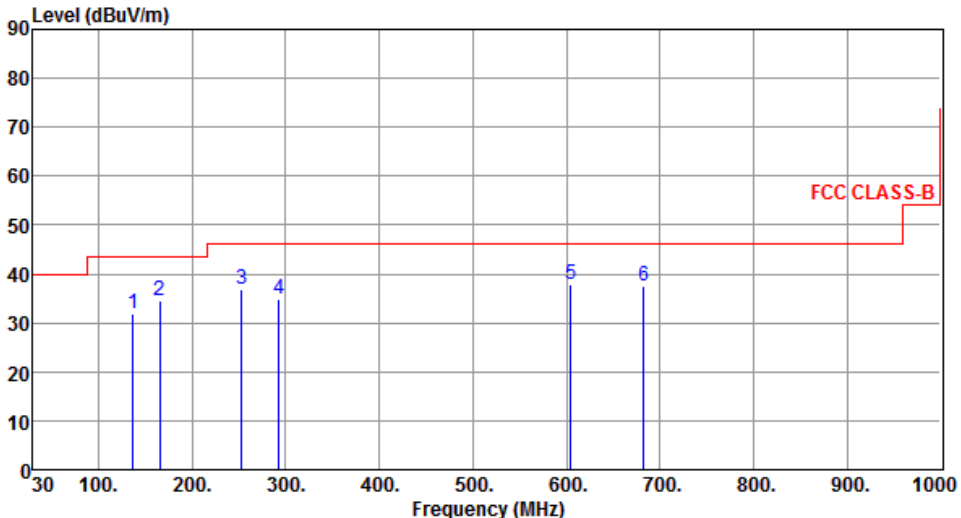


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	136.70	31.84	43.50	-11.66	49.59	-17.75	Peak	---	---
2	165.80	34.57	43.50	-8.93	51.77	-17.20	Peak	---	---
3	253.10	36.77	46.00	-9.23	54.42	-17.65	Peak	---	---
4	292.87	34.98	46.00	-11.02	51.18	-16.20	Peak	---	---
5	604.24	37.88	46.00	-8.12	47.13	-9.25	Peak	---	---
6	682.81	37.57	46.00	-8.43	45.89	-8.32	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

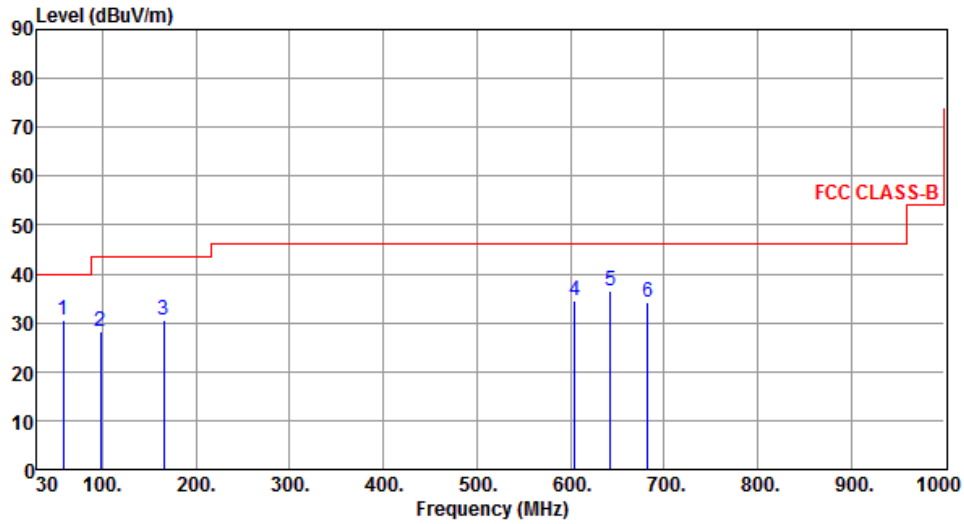

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	58.13	30.45	40.00	-9.55	47.28	-16.83	Peak	---	---
2	97.90	28.30	43.50	-15.20	50.48	-22.18	Peak	---	---
3	165.80	30.66	43.50	-12.84	47.86	-17.20	Peak	---	---
4	604.24	34.56	46.00	-11.44	43.81	-9.25	Peak	---	---
5	643.04	36.51	46.00	-9.49	45.40	-8.89	Peak	---	---
6	682.81	34.34	46.00	-11.66	42.66	-8.32	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==