



Laird's unique Phantom dual band UHF / GPS antenna is designed for heavy duty, high performance applications and operates at maximum effectiveness when mounted on a 10" diameter (min.) ground plane surface.

A threaded permanent stud mount provides vandal resistant vehicle mounting. The Phantom can also permanently mount to brackets, panels or any other kind of housing with proper ground plane surface.

FEATURES AND BENEFITS

- High performance mobile antenna operates on a 10" diameter (min.) ground plane
- Designs cover low profile to pure performance mobile applications
- Easy installation with the roof mount permanently-installed
- 100% tested on a network analyzer

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	450-470
VSWR –max	2:1
Peak Gain (dBi)	3
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	100
Polarization	Vertical
Pattern	Omnidirectional
Vertical Plane 3 dB Beamwidth Port 1 (°)	146
Horizontal Plane 3 dB Beamwidth Port 1 (°)	360

MECHANICAL SPECIFICATIONS

Dimensions – base diameter x height – cm (inches)	7.62 x 8.89 (3.0 x 3.5)
Radome Color	Black or white
Radome Material	ABS

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Material Substance Compliance	RoHS

CONFIGURATION


PART NUMBER	CABLE TYPE AND LENGTH	CONNECTOR
GPSD4103P	Dual Band Phantom 410-425 MHz & GPS, Roof Mount	N-Male/Radio, SMB Plug/GPS
GPSD4503P	Dual Band Phantom 450-470 MHz & GPS, Roof Mount	N-Male/Radio, SMB Plug/GPS
GPSD4903P	Dual Band Phantom 490-512 MHz & GPS, Roof Mount	N-Male/Radio, SMB Plug/GPS
GPS16412	Dual Band Phantom 410-425 MHz & GPS, Roof Mount	BNC male not installed
GPSD4501SP3-TL1	Dual Band Phantom 450-470 MHz & GPS, Roof Mount	SMA Male/GPS & Mini UHF Male/Radio
GPSD4501SP3-001	Dual Band Phantom 450-470 MHz & GPS, Roof Mount	Mini UHF Male/Radio, SMA Male/GPS

RADIATION PATTERNS


3300 MHz

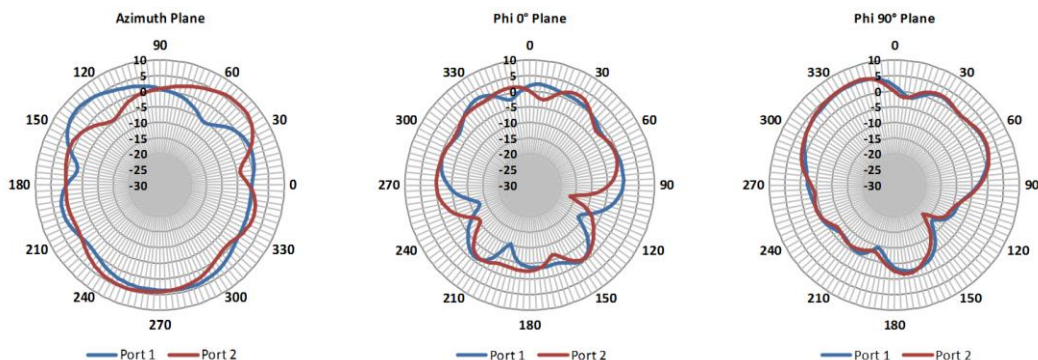

3700 MHz

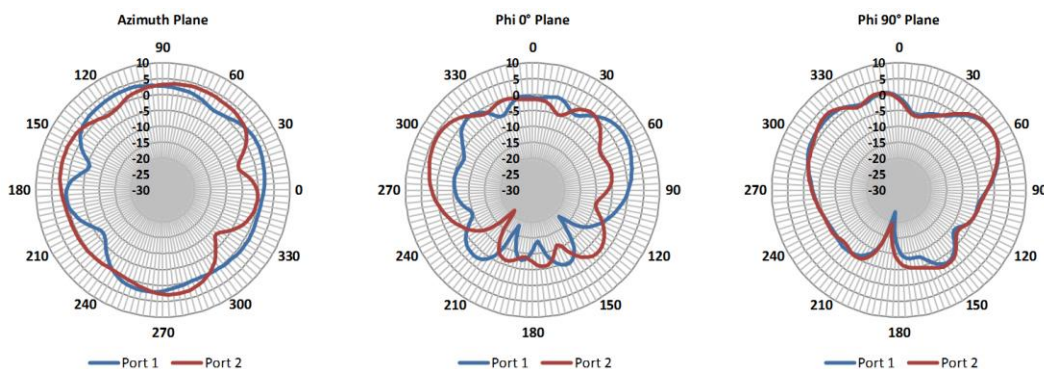

4200 MHz

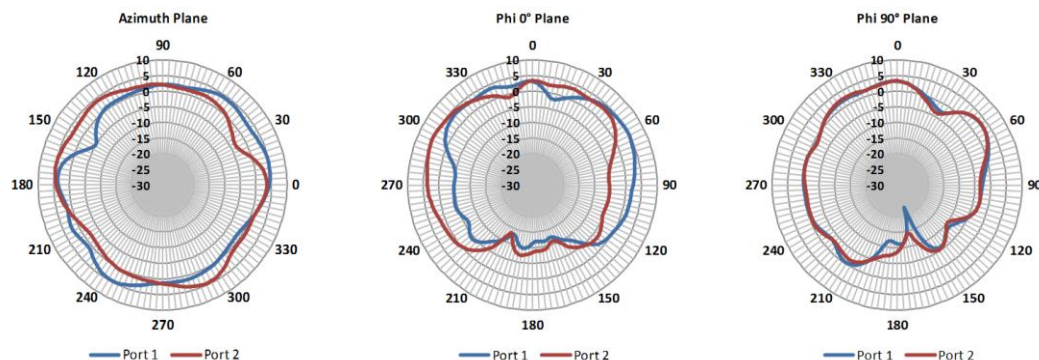

Americas: +1.847.839.6925
IAS-AmericasSales@lairdtech.com
Europe: +44.1628.858941
IAS-EUSales@lairdtech.com
Asia: IAS-AsiaSales@lairdtech.com
Middle East and Africa: +44.1628.858941
IAS-MEASales@lairdtech.com
www.lairdtech.com

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2018 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird LogSo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

