



This Laird LTE rotatable shell omni-directional antenna is a tough low-profile antenna for outdoor or indoor applications. This antenna provides frequency agility, low visibility, wide bandwidth and a low angle radiation pattern that is superior to traditional gain antennas in most applications.

The HCR6927M antenna is available in various industry-standard mounting configurations including a threaded permanent stud mount model for vandal resistant mounting on brackets, panels, ceilings, or any other kind of housing.

FEATURES AND BENEFITS

- Multi-band operation: 698-960 MHz/1710-2700 MHz
- Meets IP67 protection rating for dust tight seal and temporary water immersion
- Permanent mount provides vandal resistant protection for remote installations
- Conformance to RoHS

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	698-960	1710-2700
Gain – Max (dBi)	1.3	2.8
VSWR	<2:1	
Nominal Impedance (Ohms)	50	
Max Power - Ambient 25°C (W)	10	
Polarization	Vertical	

MECHANICAL SPECIFICATIONS

Dimensions – height x diameter – mm (inches)	83.3 x 36.5 (3.47 x 1.4)
Weight – g (lbs.)	NMO – 106 (0.23) P-Mount – 192.5 (0.42)
Antenna Color	Black/White


ENVIRONMENTAL SPECIFICATIONS

Operating Environment (Indoor or Outdoor)	Indoor and outdoor
Operating Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature – °C (°F)	-40 to +85°C (-40 to +185°F)
Wind Survival – km/hr (mph)	282 (175)
Ingress Protection Rating	IP67
Material Substance Compliance	RoHS

CONFIGURATION


PART NUMBER	FREQUENCY	COLOR	MOUNT
HCR6927M3NBL-001	698-960 MHz	Black – w/ logo	NMO
HCR6927M3NWL-001	698-960 MHz	White – w/ logo	NMO
HCR6927M3NBN-001	698-960 MHz	Black – w/o logo	NMO
HCR6927M3NWN-001	698-960 MHz	White – w/o logo	NMO
HCR6927M3PBL-001	1710-2700 MHz	Black – w/ logo	P-mount
HCR6927M3PWL-001	1710-2700 MHz	White – w/ logo	P-mount
HCR6927M3PBN-001	1710-2700 MHz	Black – w/o logo	P-mount
HCR6927M3PWN-001	1710-2700 MHz	White – w/o logo	P-mount

MOUNTING OPTIONS (remove borders when complete)

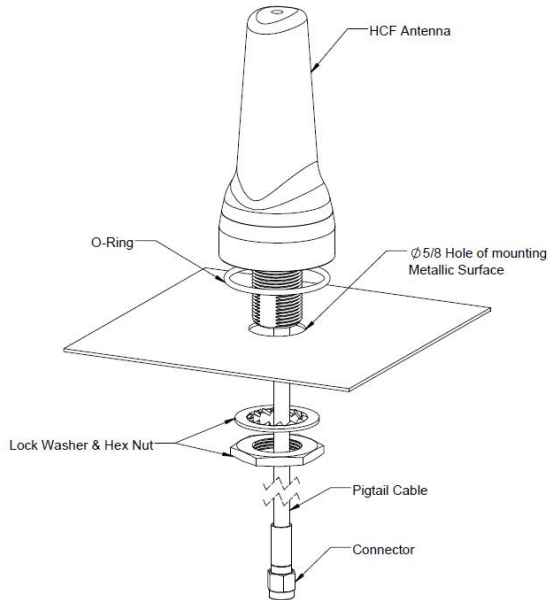


RADIATION PATTERNS


698 MHz

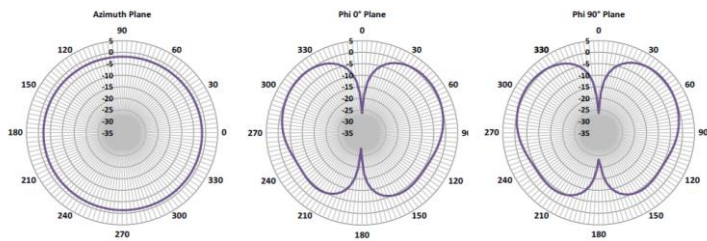


824 MHz

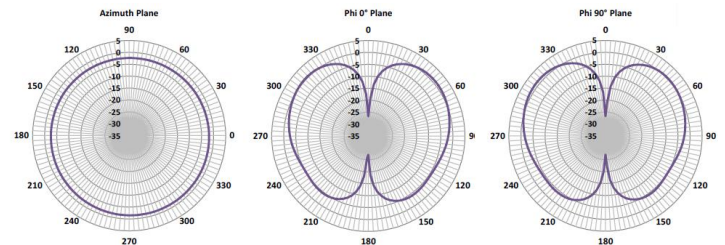


915 MHz

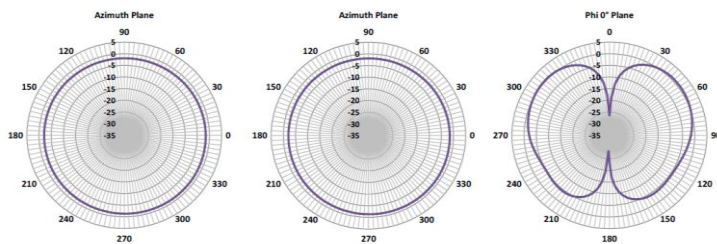

960 MHz

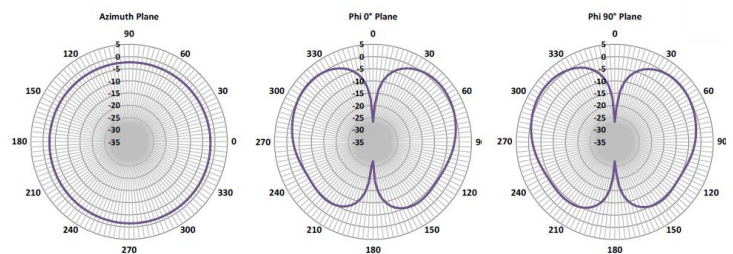

RADIATION PATTERNS

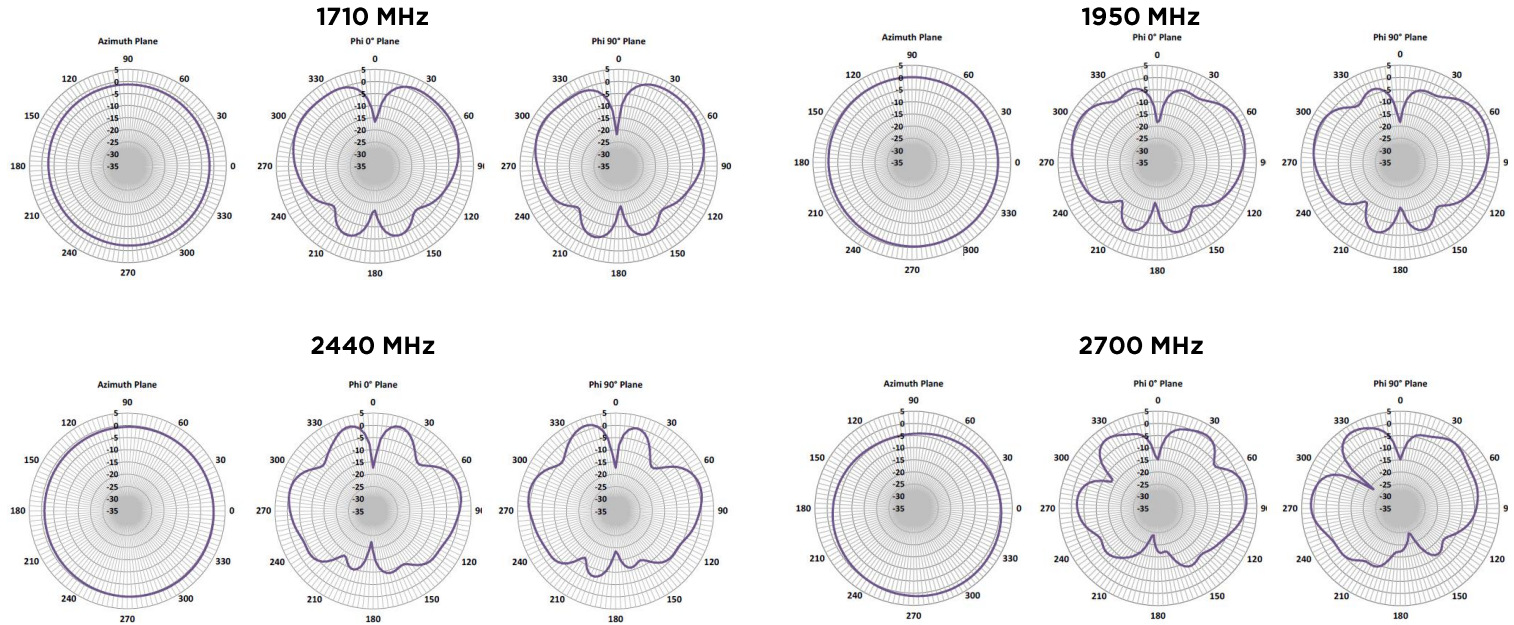

Americas: +1.847.839.6925
 IAS-AmericasSales@lairdtech.com
Europe: +44.1628.858941
 IAS-EUSales@lairdtech.com
Asia: IAS-AsiaSales@lairdtech.com
Middle East and Africa:
 +44.1628.858941
 IAS-MEAUSales@lairdtech.com
 www.lairdtech.com



Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2018 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

