

MESH SERIES™

Omnidirectional Antennas 2400 MHz- 5850 MHz



The Mesh Series™ omnidirectional antenna systems offered by Laird are designed with mesh networking in mind. With their waterproof N male connector they can be easily mounted to an enclosure like the diecast enclosure (DCE-7x6x2) to give total wireless coverage. Various gains and frequencies are available. They are constructed of UV resistant materials and are waterproof for a long service life.

FEATURES AND BENEFITS

- Mesh networking vertically polarized omni-directionals
- Various gains available: 5dBi to 12dBi
- Various frequencies available: 2.4GHz 3.5GHz, 4.9GHz, 5GHz, also tri-band model
- Type N male integrated connector Rugged, lightweight, and waterproof


| ELECTRICAL SPECIFICATIONS | OD24M-5 | OD24M-7 | OD24M-9 | OD24M-12 | OD35M-10 | OD49M-6 | OD49M-11 | OD5WM6 | OD58M-12 |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Operating Frequency (MHz) | 2400-2485 | 2400-2485 | 2400-2485 | 2400-2485 | 3400-3600 | 4940-4990 | 4940-4990 | 5150-5850 | 5400-5850 |
| Gain (dBi) | 5 | 7 | 9 | 12 | 10 | 6 | 11 | 6 | 12 |
| Vertical Bandwidth (°) | 25 | 18 | 14 | 7 | 14 | 30 | 5 | 8.5 | 7 |
| VSWR | 1.5:1 | | | | | | | | |
| Impedance (Ohms) | 50 | | | | | | | | |
| Input Power | 10 | | | | | | | | |
| Rate wind velocity m/sec (mph) | 56 (125) | | | | | | | | |
| Operating temperature (°C) | -40 - +70 | | | | | | | | |

| MECHANICAL SPECIFICATIONS | OD24M-5 | OD24M-7 | OD24M-9 | OD24M-12 | OD35M-10 | OD49M-6 | OD49M-11 | OD5WM6 | OD58M-12 |
|--|------------------------|------------------------|------------------------|-------------------------|------------------------|-----------------------|----------|-------------|----------|
| Dimensions – diameter x height – mm (inches) | 15 x 355 (0.6 x 12) | 15 x 540 (0.6 x 21) | 15 x 690 (0.6 x 27) | 15 x 1220 (0.6 x 48) | 15 x 690 (0.6 x 27) | 13 x 175 (0.5 x 7) | 15 x 787 | 15 x 483 | 15 x 700 |
| Weight – kg (lbs.) | .2 (.5) | .3 (.6) | .4 (.8) | .6 (1.4) | .5 (1.1) | .043 (1.5) | .5 (1.1) | .14 (.3125) | .5 (.65) |


CONFIGURATION

| MODEL | DESCRIPTION |
|----------|---------------------------------------|
| OD24M-5 | 2400-2485 MHz Omnidirectional Antenna |
| OD24M-7 | 2400-2485 MHz Omnidirectional Antenna |
| OD24M-9 | 2400-2485 MHz Omnidirectional Antenna |
| OD24M-12 | 2400-2485 MHz Omnidirectional Antenna |
| OD35M-10 | 3400-3600 MHz Omnidirectional Antenna |
| OD49M-6 | 4940-4990 MHz Omnidirectional Antenna |
| OD49M-11 | 4940-4990 MHz Omnidirectional Antenna |
| OD5WM6 | 5150-5850 MHz Omnidirectional Antenna |
| OD58M-12 | 5400-5850 MHz Omnidirectional Antenna |



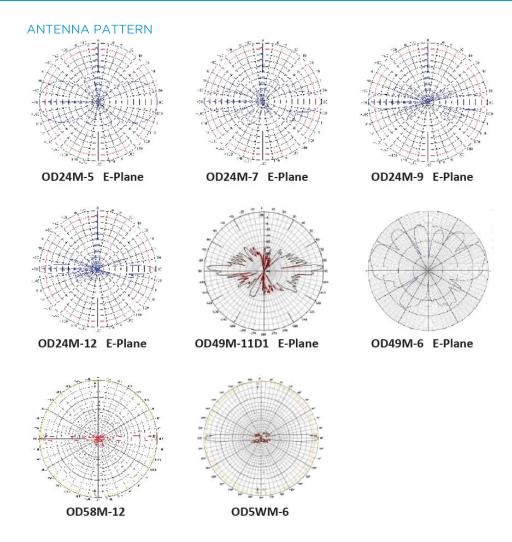

SYSTEM ORDERING

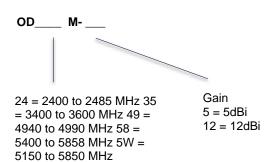

Americas: +1.847 839.6925 IAS-AmericasSales@lairdtech.com Europe: +44.1628.858941 IAS-EUSales@lairdtech.com Asia: IAS-AsiaSales@lairdtech.com Middle East and Africa: +44.1628.858941 IAS-MEAUSales@lairdtech.com https://connectivity.lairdtech.com

√RoHS

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.



Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2018 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.