



The OC69271 antenna is a wide band omnidirectional antenna covering the domestic LTE700/Cellular/PCS/AWS/MDS, WiMAX 2300/2500, and global GSM900/GSM1800/UMTS/LTE2600 bands. It can be used in both indoor and outdoor applications. It comes complete with mast mounting hardware and includes a UV stable radome enclosure that provides years of use without degradation to either mechanical properties or aesthetics.

FEATURES AND BENEFITS

- Applicable for both 3G and 4G solutions
- Domestic LTE 700 band and Global LTE 2600 band
- Domestic Cellular and Global GSM
- WiMAX 2300/2500/2600
- Weatherproof UV stable radome
- Mast mounting hardware included

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	698-960	1710-1990	1920-2170	2100-2500	2500-2690
VSWR	<2.5:1	<2.0:1			
Gain (dBi)	1.5 dBi	3.5			
Efficiency (%)	76	87			
Nominal Impedance (Ohms)	50				
Max Power - Ambient 25°C (W)	10				
Polarization	Linear, Vertical				
Vertical Plane 3 dB Beamwidth	81°	75° (1700-2200)			100°
Horizontal Plane 3 dB Beamwidth	360°, Omnidirectional				

MECHANICAL SPECIFICATIONS

Dimensions – diameter x height – mm (inches)	24.5 x 248 (1 x 9.8)
Weight – kg (lbs.)	.156 (.343)
Mount Style	Mast/pole mount
Radome Material	Polycarbonate, UV, White

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature - °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Material Substance Compliance	RoHS

CONFIGURATION


MODEL NUMBER	CONNECTOR
OC69271-FNM	Type N male
OC69271-FNF	Type N female

RADIATION PATTERNS


698 MHz

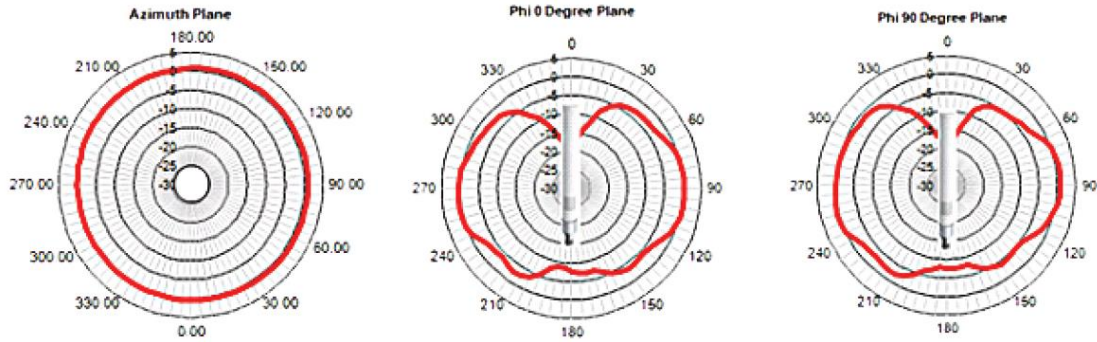


824 MHz

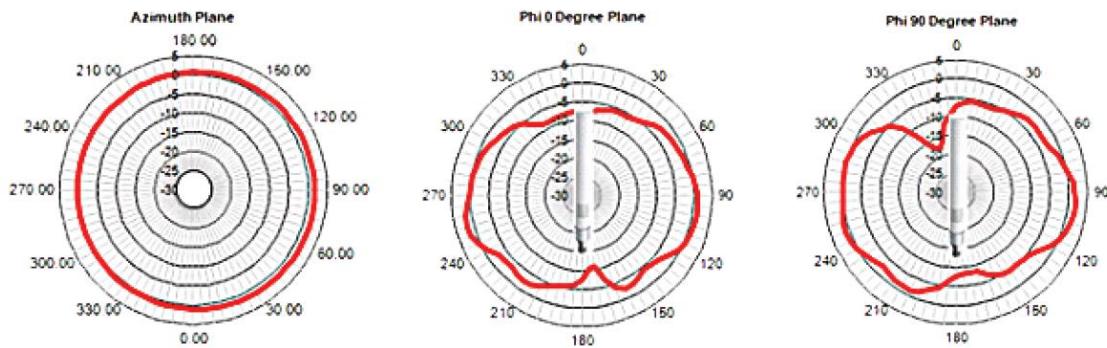

960 MHz



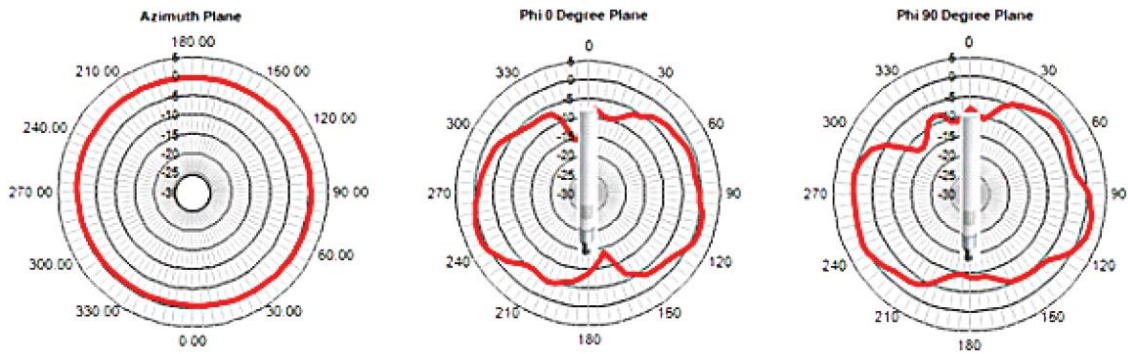


1710 MHz



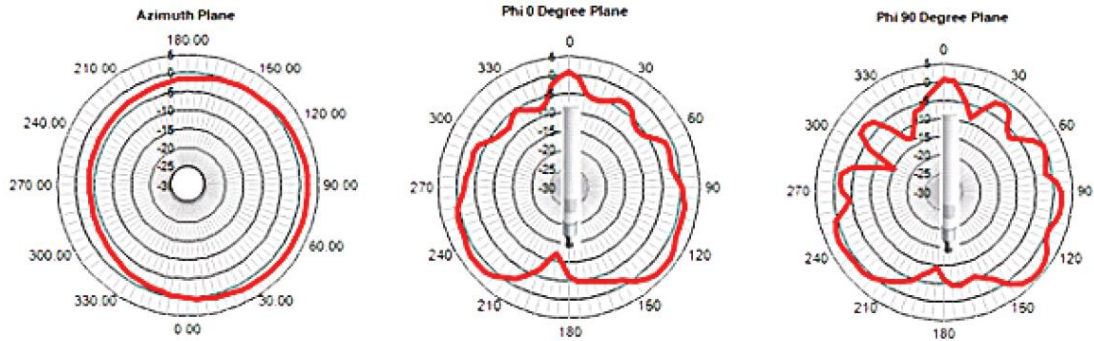


RADIATION PATTERNS




2170 MHz

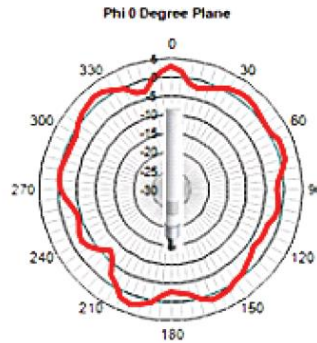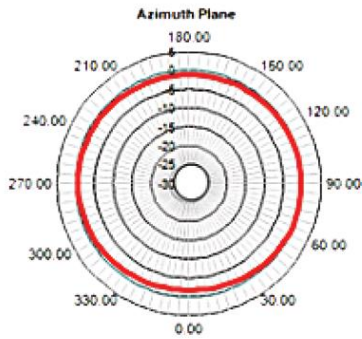

2170 MHz

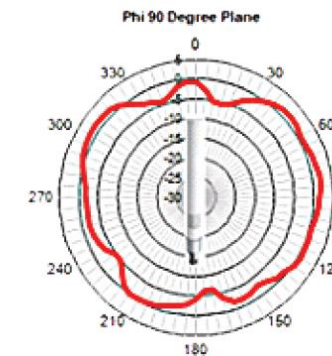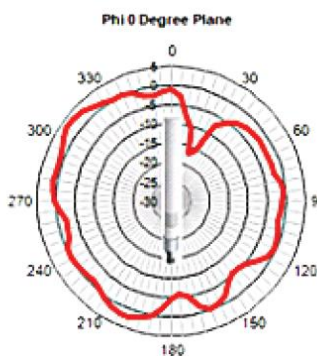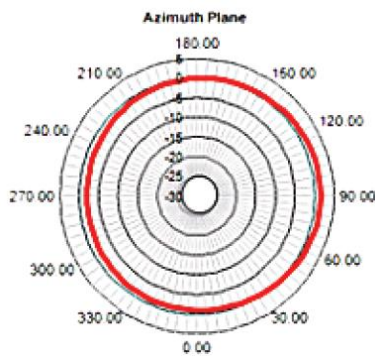

2700 MHz

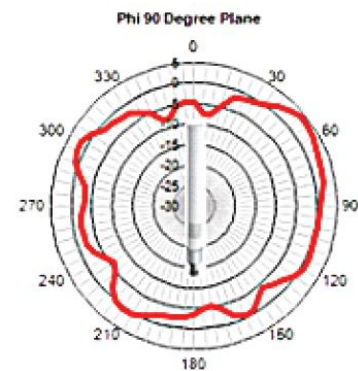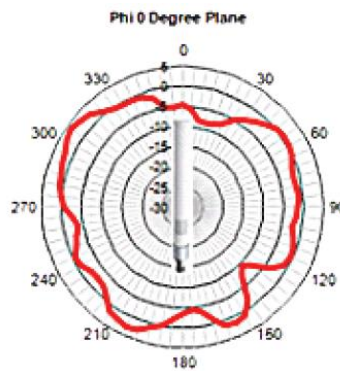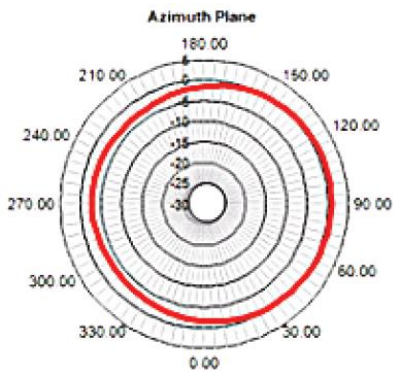

Americas: +1.847.839.6925
 IAS-AmericasSales@lairdtech.com
 Europe: +44.1628.858941
 IAS-EUSales@lairdtech.com
 Asia: IAS-AsiaSales@lairdtech.com
 Middle East and Africa:
 +44.1628.858941
 IAS-MEASales@lairdtech.com
 www.lairdtech.com



Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2018 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

