


### Innovative **Technology** for a **Connected** World

# 5 GHz Direct-Mount Omni Antenna



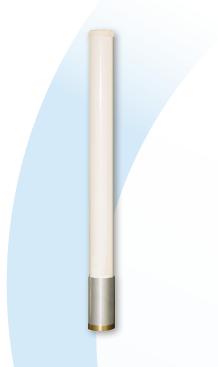

#### 4900-5850 MHz V-POL OMNIDIRECTIONAL ANTENNA

Laird Technologies' 4900-5850 MHz wide-band omnidirectional antenna is optimized for direct chassis mount to outdoor radios and NEMA enclosures. Standard in each antenna of this series is an integrated N male connector, directly mounted to the antenna base. The rugged connector is perfect for outdoor MESH applications that may require the direct mount to the radio or enclosure.

Enclosed in a UV-stable, water-resistant housing, the S5156WB antenna provides years of trouble-free service. The series includes antennas of various gains, all with integrated N male connectors. A mast-mount hardware kit is available for applications that require remote mount from the radio enclosure.


#### FEATURES **✓**RoHS

- · Vertically polarized and omnidirectional
- Rugged, lightweight, and water resistant
- 4900-5850 MHz with full 802.11a wide-band performance
- Facilitates direct-to-radio mounting with Integrated type N male connector
- 802.11a indoor or outdoor coverage


#### **MARKETS**

WiMAX

PARAMETER	SPECIFICATION
Frequency (MHz)	4900-5850
Gain (4900-5000)	7 dBi
Gain (5400-5850)	8 dBi
Elevation beamwidth	16°
Azimuth beamwidth	Omnidirectional
Polarization	Vertical Linear
VSWR	2.0:1
Weight lbs.	0.37
Mounting Style	Direct Mount
Dimensions (in)	1.0 x 11.5
Wide load rating	125 mph
Enclosure	Polycarbonate
Power (Watts)	5
RF Connectors	N (m)



E Plane 5.5 GHz



H Plane 5.5 GHz

## global solutions: local support ™

Americas: +1.847 839.6907 IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12 IAS-EUSales@lairdtech.com Asia: +1.65.6.243.8022 IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-S5156WB 0611

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies makes are used to the considerable of the control or consequential damages of any kind. All Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products sold pursuant to the Laird Technologies (or general uses. Laird Technologies products or user to the Laird Laird Technologies, the Laird Laird Cantologies, the Laird Cantologies, the Laird Laird Cantologies, the Laird Laird Cantologies, the Laird Laird Cantologies, the Laird Laird Cantologies, the Laird Cantologies, th