

CE Test Report

Equipment : 45 Series Pluggable module
Model No. : MSD45N
Brand Name : Laird Technologies
Applicant : Laird Technologies
Address : W66N220 Commerce Court, Cedarburg,
Wisconsin 53012, USA
Standard : EN 300 328 V2.1.1 (2016-11)
Received Date : May 02, 2017
Tested Date : Jan. 20 ~ Jan. 25, 2016 (for original test)
May 20, 2017(for new test)

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


James Fan / Assistant Manager

Approved by:


Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data.....	8
1.5	Testing Applied Standards	9
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	RF Output Power	12
3.2	Power Spectral Density	18
3.3	Occupied Channel Bandwidth	21
3.4	Transmitter Unwanted Emissions in the Out-Of-Band Domain.....	22
3.5	Transmitter Unwanted Emissions in the Spurious Domain	32
4	RECEIVER TEST RESULTS	58
4.1	Receiver Spurious Emissions.....	58
5	ADAPTIVITY TEST RESULTS.....	72
5.1	Adaptivity and Unwanted Signal Parameters	72
6	RECEIVER BLOCKING TEST RESULTS.....	78
6.1	Receiver Blocking.....	78
7	PHOTOGRAPHS OF THE TEST CONFIGURATION	82
8	TEST LABORATORY INFORMATION	85

Release Record

Report No.	Version	Description	Issued Date
ER371704-03AC	Rev. 01	Initial issue	Jun. 05, 2017

Summary of Test Results

Ref. Std. Clause	Test Items	Measured	Result
4.3.2.2	RF Output Power	19.98 dBm.	Pass
4.3.2.3	Power Spectral Density	Meet the requirement of limit.	Pass
4.3.2.4	Duty Cycle, Tx-sequence, Tx-gap	Only for non-adaptive equipment.	N/A
4.3.2.5	Medium Utilisation (MU) factor	Only for non-adaptive equipment.	N/A
4.3.2.6	Adaptivity	Meet the requirement of limit.	Pass
4.3.2.7	Occupied Channel Bandwidth	Meet the requirement of limit.	Pass
4.3.2.8	Transmitter unwanted emissions in the out of band domain	Meet the requirement of limit.	Pass
4.3.2.9	Transmitter unwanted emissions in the spurious domain	Meet the requirement of limit.	Pass
4.3.2.10	Receiver spurious emissions	Meet the requirement of limit.	Pass
4.3.2.11	Receiver Blocking	Meet the requirement of limit.	Pass
4.3.2.12	Geo-location Capability	The device has no this capability.	N/A

1 General Description

1.1 Information

This report is issued as a supplementary report to original ICC report no. ER371704-02AC. The modification is updating standard version from V1.9.1 to V2.1.1. Therefore, related test items had been performed and presented in the following sections.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2472	1-13 [13]	1	1-11 Mbps
2400-2483.5	g	2412-2472	1-13 [13]	1	6-54 Mbps
2400-2483.5	n (HT20)	2412-2472	1-13 [13]	1	MCS 0-7

Note 1: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
Note 2: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Brand / Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				2400~2483.5	5150~5250	5250~5350	5470~5725
1	MAG.LAYERS EDA-1513-25GR2 -B2-CY	Dipole	SMA Jack Reverse	2	2	2	2
2	MAG.LAYERS PCA-4606-2G4C1 -A13-CY	PCB Dipole	UFL	2.21	2.21	2.21	2.21
3	Laird NanoBlade-IP04	PCB Dipole	UFL	2	3.9	3.9	4
4	Laird MAF95310 Mini NanoBlade Flex	PCB Dipole	UFL	2.79	3.38	3.38	3.38
5	Laird NanoBlue-IP04	PCB Dipole	UFL	2	---	---	---
6	Ethertronics WLAN_1000146	PIFA	UFL	2.5	3.5	3.5	3.5

1.1.3 EUT Operational Condition

Power Supply Type	3.3Vdc from host		
SW Version	23.3.3.5		
Operational Climatic	☒ Tnom (20°C)	☒ Tmax (70°C)	☒ Tmin (-20°C)

1.1.4 Accessories

N/A

1.1.5 Adaptive Equipment

Adaptive Equipment	
☐	non-Adaptive Equipment:
	The maximum RF Output Power (e.i.r.p.): dBm
	The maximum (corresponding) Duty Cycle: %
☒	Adaptive Equipment without the possibility to switch to a non-adaptive mode:
☒	The equipment has implemented an LBT based DAA mechanism:
	☐ The equipment is Frame Based equipment
	☒ The equipment is Load Based equipment
	☐ The equipment can switch dynamically between Frame Based and Load Based equipment
☐	The equipment has implemented an non-LBT based DAA mechanism
☐	The equipment can operate in more than one adaptive mode
☐	Adaptive Frequency Hopping using other forms of DAA (non-LBT based)/without Short Control Signaling Transmissions
☐	Adaptive Equipment which can also operate in a non-adaptive mode

1.1.6 Channel List

Channel	Frequency(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462
12	2467
13	2472

1.1.7 Test Tool and Duty Cycle

Test tool	ART, Version: rev0.2 build#26
Duty Cycle Of Test Signal (%)	100% - IEEE 802.11b 99.32% - IEEE 802.11g 99.25% - IEEE 802.11n (HT20)
Duty Factor	0 - IEEE 802.11b 0.03 - IEEE 802.11g 0.03 - IEEE 802.11n (HT20)


1.1.8 Power Setting

Modulation Mode	Test Frequency (MHz)		
	2412	2442	2472
b	16	15.5	16.5
g	16.5	16	17
n (HT20)	16.5	16	17

1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6440	2ZC4Z52	DoC	---

1.3 Test Setup Chart

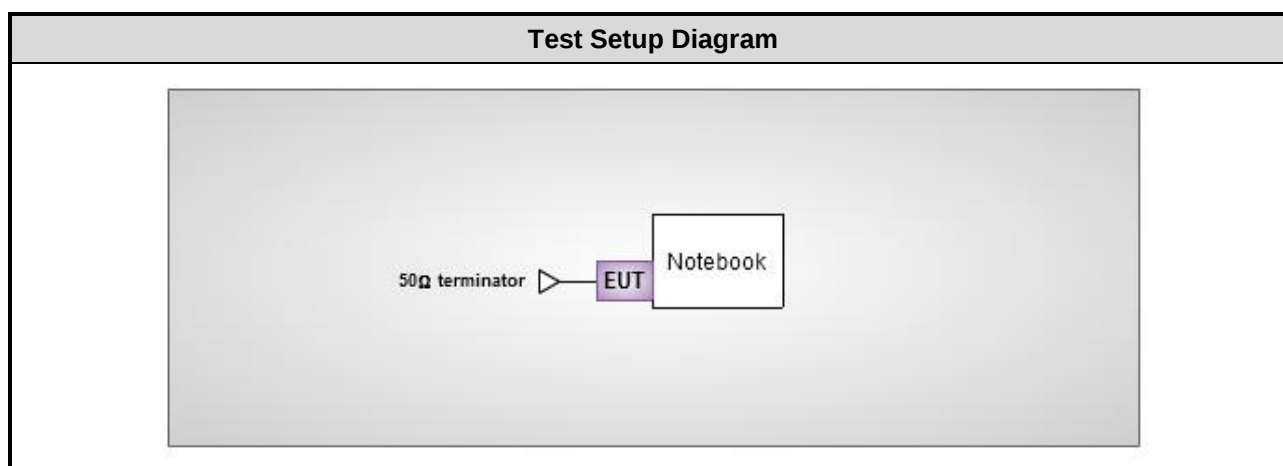

1.4 Test Equipment List and Calibration Data

Test Item	Radiated Emissions				
Test Site	Fully-anechoic chamber 1 / (05CH01-WS)				
Tested Date	Jan. 25, 2016				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	Agilent	N9010A	MY54200247	Aug. 24, 2015	Aug. 23, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Oct. 03, 2015	Oct. 02, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1094	Oct. 20, 2015	Oct. 19, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 04, 2016	Jan. 03, 2017
Preamplifier	Agilent	83017A	MY39501310	Dec. 11, 2015	Dec. 10, 2016
Preamplifier	EMC	EMC02325	980146	Oct. 14, 2015	Oct. 13, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16609/4	Dec. 04, 2015	Dec. 03, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16608/4	Dec. 04, 2015	Dec. 03, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16617/4	Dec. 04, 2015	Dec. 03, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-005	Dec. 04, 2015	Dec. 03, 2016
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-006	Dec. 04, 2015	Dec. 03, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Jan. 20, 2016				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101486	Oct. 14, 2015	Oct. 13, 2016
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 27, 2015	Nov. 26, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
DC POWER SOURCE	GW INSTEK	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Measurement Software	Agilent	EN RF test	1.1501125	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Adaptivity				
Test Site	(TH01-WS)				
Tested Date	Jan. 20, 2016				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum	R&S	FSV-7	101607	Dec. 10, 2015	Dec. 09, 2016
Spectrum	Keysight	N9010A	MY54510374	May. 18, 2015	May. 17, 2016
Signal Generator	R&S	SMB100A	175727	Oct. 05, 2015	Oct. 04, 2016
RF cable-4M	HUBER+SUHNER	SUCOFLEX_104	MY15686/4	Dec. 17, 2015	Dec. 16, 2016
RF cable-0.5M	HUBER+SUHNER	SUCOFLEX_104	296081/4	Dec. 17, 2015	Dec. 16, 2016
RF cable-0.2M	HUBER+SUHNER	SUCOFLEX_104	329023/4	Dec. 17, 2015	Dec. 16, 2016
RF cable-0.2M	HUBER+SUHNER	SUCOFLEX_104	329021/4	Dec. 17, 2015	Dec. 16, 2016
MXG-B RF Vector Signal Generator	Agilent	N5182B	MY53050081	Mar. 30, 2015	Mar. 29, 2016
Preamplifier	EMC	EMC02325	980146	Oct. 14, 2015	Oct. 13, 2016
Oscilloscope	National Instruments	USB-5133	F651FF	Jun. 15, 2015	Jun. 14, 2016
Measurement Software	Sporton	Sporton_3	1.0.0.22	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Receiver Blocking				
Test Site	(05CH01-WS)				
Tested Date	May 20, 2017				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Wireless connectivity tester	ROHDE&SCHWARZ	CMW270	100856	Nov. 07, 2016	Nov. 06, 2017
Signal Generator	R&S	SMB100A	175727	Oct. 19, 2016	Oct. 18, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX_104	500202/4	Dec. 16, 2016	Dec. 15, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX_104	296088/4	Dec. 16, 2016	Dec. 15, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX_104	329023/4	Dec. 16, 2016	Dec. 15, 2017
Note: Calibration Interval of instruments listed above is one year.					

1.5 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

EN 300 328 V2.1.1 (2016-11)

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Parameters	Uncertainty	Limit
Occupied Channel Bandwidth	$\pm 0.0034 \%$	$\pm 5 \%$
RF output power, conducted	$\pm 0.537 \text{ dB}$	$\pm 1.5 \text{ dB}$
Power Spectral Density, conducted	$\pm 0.463 \text{ dB}$	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 2.505 \text{ dB}$	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 3.401 \text{ dB}$	$\pm 6 \text{ dB}$
Temperature	$\pm 0.6 \text{ }^{\circ}\text{C}$	$\pm 3 \text{ }^{\circ}\text{C}$
Supply voltages	$\pm 0.16 \%$	$\pm 3 \%$
Time	$\pm 0.1 \%$	$\pm 5 \%$

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
RF Conducted	TH01-WS	22°C / 63%	Ryan Lee Alex Huang
Radiated Emission	05CH01-WS	23°C / 70%	Ryan Lee
Adaptivity	TH01-WS	24°C / 63%	Ryan Lee
Receiver Blocking	05CH01-WS	22.5°C / 64%	Jack Li

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
RF Output Power	11b 11g HT20	2412 / 2442 / 2472 2412 / 2442 / 2472 2412 / 2442 / 2472	1 Mbps 6 Mbps MCS 0	1, 2, 3
Power Spectral Density				
Transmitter unwanted emissions in the out of band domain				
Occupied Channel Bandwidth	11b 11g HT20	2412 / 2472 2412 / 2472 2412 / 2472	1 Mbps 6 Mbps MCS 0	1
Adaptivity / Receiver Blocking				
Transmitter Spurious Emissions ≤ 1GHz	11g	2412 / 2472	6 Mbps	Note 2
Transmitter Spurious Emissions > 1GHz	11b 11g HT20	2412 / 2472 2412 / 2472 2412 / 2472	1 Mbps 6 Mbps MCS 0	Note 2
Receiver Spurious Emissions	11g	2412 / 2472	6 Mbps	Note 2
Receiver Blocking	11b	2412 / 2472	1 Mbps	2

NOTE:

- 3 types antenna are used for this device, highest gain antenna of each type is selected to perform radiated emission test as below test configuration.
 - Configuration 1 : Dipole antenna (Antenna No.1)
 - Configuration 2 : PCB Dipole antenna (Antenna No.4)
 - Configuration 3 : PIFA antenna (Antenna No.6)
- Conducted and radiated emissions are measured. A 50Ω terminator is connected to antenna port of EUT for radiated emission measurement.

3 Transmitter Test Results

3.1 RF Output Power


3.1.1 Limit of RF Output Power

For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

3.1.2 Test Procedures

Reference to clause 5.4.2.2 of ETSI EN 300 328 V2.1.1 (2016-11).

3.1.3 Test Setup

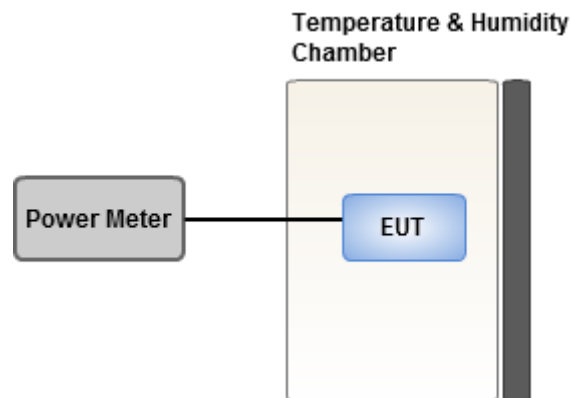

3.1.4 Test Result of RF Output Power

RF Output Power (dBm)				
Test Configuration	1			
Modulation Mode	11b/1Mbps			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
T _{nom} V _{nom}	2412	17.83	20	Pass
T _{min} V _{nom}	2412	18.15	20	Pass
T _{max} V _{nom}	2412	18.54	20	Pass
T _{nom} V _{nom}	2442	18.08	20	Pass
T _{min} V _{nom}	2442	18.68	20	Pass
T _{max} V _{nom}	2442	18.84	20	Pass
T _{nom} V _{nom}	2472	18.07	20	Pass
T _{min} V _{nom}	2472	19.24	20	Pass
T _{max} V _{nom}	2472	18.61	20	Pass

RF Output Power (dBm)				
Test Configuration	1			
Modulation Mode	11g/6Mbps			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
T _{nom} V _{nom}	2412	18.16	20	Pass
T _{min} V _{nom}	2412	18.03	20	Pass
T _{max} V _{nom}	2412	19.17	20	Pass
T _{nom} V _{nom}	2442	18.32	20	Pass
T _{min} V _{nom}	2442	18.22	20	Pass
T _{max} V _{nom}	2442	19.10	20	Pass
T _{nom} V _{nom}	2472	18.23	20	Pass
T _{min} V _{nom}	2472	18.59	20	Pass
T _{max} V _{nom}	2472	18.90	20	Pass

RF Output Power (dBm)				
Test Configuration	1			
Modulation Mode	HT20/MCS 0			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
T _{nom} V _{nom}	2412	18.12	20	Pass
T _{min} V _{nom}	2412	17.86	20	Pass
T _{max} V _{nom}	2412	18.79	20	Pass
T _{nom} V _{nom}	2442	18.25	20	Pass
T _{min} V _{nom}	2442	18.31	20	Pass
T _{max} V _{nom}	2442	19.14	20	Pass
T _{nom} V _{nom}	2472	18.24	20	Pass
T _{min} V _{nom}	2472	18.41	20	Pass
T _{max} V _{nom}	2472	18.76	20	Pass

RF Output Power (dBm)				
Test Configuration	2			
Modulation Mode	11b/1Mbps			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
T _{nom} V _{nom}	2412	18.62	20	Pass
T _{min} V _{nom}	2412	18.94	20	Pass
T _{max} V _{nom}	2412	19.33	20	Pass
T _{nom} V _{nom}	2442	18.87	20	Pass
T _{min} V _{nom}	2442	19.47	20	Pass
T _{max} V _{nom}	2442	19.63	20	Pass
T _{nom} V _{nom}	2472	18.86	20	Pass
T _{min} V _{nom}	2472	19.98	20	Pass
T _{max} V _{nom}	2472	19.40	20	Pass

RF Output Power (dBm)				
Test Configuration	2			
Modulation Mode	11g/6Mbps			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
T _{nom} V _{nom}	2412	18.95	20	Pass
T _{min} V _{nom}	2412	18.82	20	Pass
T _{max} V _{nom}	2412	19.96	20	Pass
T _{nom} V _{nom}	2442	19.11	20	Pass
T _{min} V _{nom}	2442	19.01	20	Pass
T _{max} V _{nom}	2442	19.89	20	Pass
T _{nom} V _{nom}	2472	19.02	20	Pass
T _{min} V _{nom}	2472	19.38	20	Pass
T _{max} V _{nom}	2472	19.69	20	Pass

RF Output Power (dBm)				
Test Configuration	2			
Modulation Mode	HT20/MCS 0			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
T _{nom} V _{nom}	2412	18.91	20	Pass
T _{min} V _{nom}	2412	18.65	20	Pass
T _{max} V _{nom}	2412	19.58	20	Pass
T _{nom} V _{nom}	2442	19.04	20	Pass
T _{min} V _{nom}	2442	19.10	20	Pass
T _{max} V _{nom}	2442	19.93	20	Pass
T _{nom} V _{nom}	2472	19.03	20	Pass
T _{min} V _{nom}	2472	19.20	20	Pass
T _{max} V _{nom}	2472	19.55	20	Pass

RF Output Power (dBm)				
Test Configuration	3			
Modulation Mode	11b/1Mbps			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
T _{nom} V _{nom}	2412	18.33	20	Pass
T _{min} V _{nom}	2412	18.65	20	Pass
T _{max} V _{nom}	2412	19.04	20	Pass
T _{nom} V _{nom}	2442	18.58	20	Pass
T _{min} V _{nom}	2442	19.18	20	Pass
T _{max} V _{nom}	2442	19.34	20	Pass
T _{nom} V _{nom}	2472	18.57	20	Pass
T _{min} V _{nom}	2472	19.74	20	Pass
T _{max} V _{nom}	2472	19.11	20	Pass

RF Output Power (dBm)				
Test Configuration	3			
Modulation Mode	11g/6Mbps			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
T _{nom} V _{nom}	2412	18.66	20	Pass
T _{min} V _{nom}	2412	18.53	20	Pass
T _{max} V _{nom}	2412	19.67	20	Pass
T _{nom} V _{nom}	2442	18.82	20	Pass
T _{min} V _{nom}	2442	18.72	20	Pass
T _{max} V _{nom}	2442	19.60	20	Pass
T _{nom} V _{nom}	2472	18.73	20	Pass
T _{min} V _{nom}	2472	19.09	20	Pass
T _{max} V _{nom}	2472	19.40	20	Pass

RF Output Power (dBm)				
Test Configuration	3			
Modulation Mode	HT20/MCS 0			
Condition	Freq. (MHz)	EIRP Power	Limit (dBm)	Results
$T_{nom}V_{nom}$	2412	18.62	20	Pass
$T_{min}V_{nom}$	2412	18.36	20	Pass
$T_{max}V_{nom}$	2412	19.29	20	Pass
$T_{nom}V_{nom}$	2442	18.75	20	Pass
$T_{min}V_{nom}$	2442	18.81	20	Pass
$T_{max}V_{nom}$	2442	19.64	20	Pass
$T_{nom}V_{nom}$	2472	18.74	20	Pass
$T_{min}V_{nom}$	2472	18.91	20	Pass
$T_{max}V_{nom}$	2472	19.26	20	Pass

3.2 Power Spectral Density


3.2.1 Limit of Power Spectral Density

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

3.2.2 Test Procedures

Reference to clause 5.4.3.2 of ETSI EN 300 328 V2.1.1 (2016-11).

3.2.3 Test Setup



3.2.4 Test Result of Power Spectral Density

Test Configuration	1			
Modulation Mode	Freq. (MHz)	Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Results
11b/1Mbps	2412	8.73	10	Pass
11b/1Mbps	2442	8.93	10	Pass
11b/1Mbps	2472	8.92	10	Pass
11g/6Mbps	2412	6.52	10	Pass
11g/6Mbps	2442	6.73	10	Pass
11g/6Mbps	2472	6.62	10	Pass
HT20/MCS 0	2412	6.66	10	Pass
HT20/MCS 0	2442	6.82	10	Pass
HT20/MCS 0	2472	6.36	10	Pass

Test Configuration	2			
Modulation Mode	Freq. (MHz)	Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Results
11b/1Mbps	2412	9.52	10	Pass
11b/1Mbps	2442	9.72	10	Pass
11b/1Mbps	2472	9.71	10	Pass
11g/6Mbps	2412	7.31	10	Pass
11g/6Mbps	2442	7.52	10	Pass
11g/6Mbps	2472	7.41	10	Pass
HT20/MCS 0	2412	7.45	10	Pass
HT20/MCS 0	2442	7.61	10	Pass
HT20/MCS 0	2472	7.15	10	Pass

Test Configuration	3			
Modulation Mode	Freq. (MHz)	Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Results
11b/1Mbps	2412	9.23	10	Pass
11b/1Mbps	2442	9.43	10	Pass
11b/1Mbps	2472	9.42	10	Pass
11g/6Mbps	2412	7.02	10	Pass
11g/6Mbps	2442	7.23	10	Pass
11g/6Mbps	2472	7.12	10	Pass
HT20/MCS 0	2412	7.16	10	Pass
HT20/MCS 0	2442	7.32	10	Pass
HT20/MCS 0	2472	6.86	10	Pass

3.3 Occupied Channel Bandwidth

3.3.1 Limit of Occupied Channel Bandwidth


The Occupied Channel Bandwidth shall fall completely within 2.4~2.4835 GHz.

In addition, for non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

3.3.2 Test Procedures

Reference to clause 5.4.7.2 of ETSI EN 300 328 V2.1.1 (2016-11).

3.3.3 Test Setup




3.3.4 Test Result of Occupied Channel Bandwidth

Test Configuration	1				
Modulation Mode	Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Limit F _L / F _H (MHz)
11b/1Mbps	2412	13.95	2405.05	2419.00	2400.0
11b/1Mbps	2472	13.95	2465.05	2479.00	2483.5
11g/6Mbps	2412	17.08	2403.49	2420.57	2400.0
11g/6Mbps	2472	17.08	2463.49	2480.57	2483.5
HT20/MCS 0	2412	18.23	2402.91	2421.15	2400.0
HT20/MCS 0	2472	18.18	2462.91	2481.09	2483.5

3.4 Transmitter Unwanted Emissions in the Out-Of-Band Domain


3.4.1 Limit of Transmitter Unwanted Emissions in the Out-Of-Band Domain

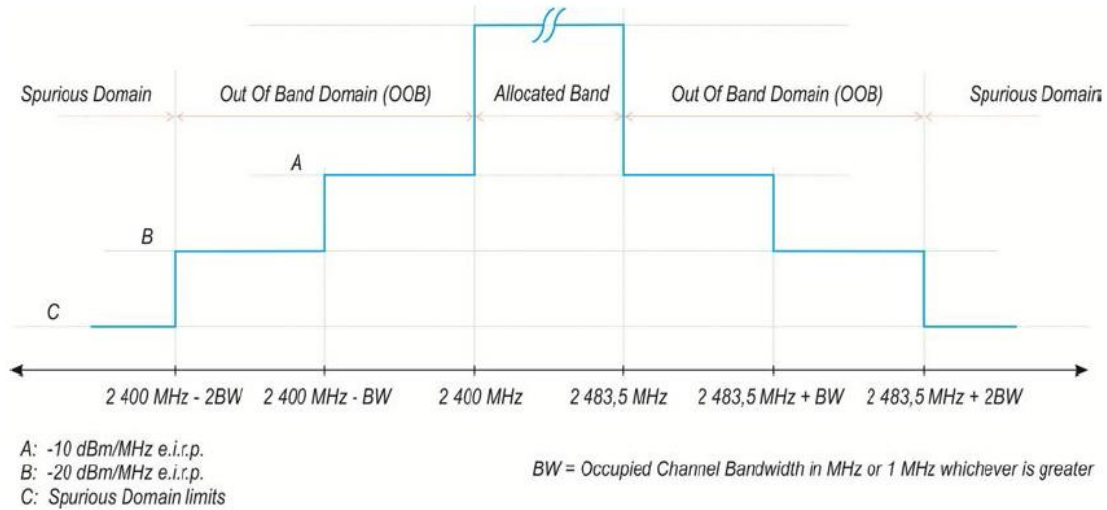



3.4.2 Test Procedures



Reference to clause 5.4.8.2 of ETSI EN 300 328 V2.1.1 (2016-11).



3.4.3 Test Setup







3.4.4 Test Result of Transmitter Unwanted Emissions in the Out-Of-Band Domain

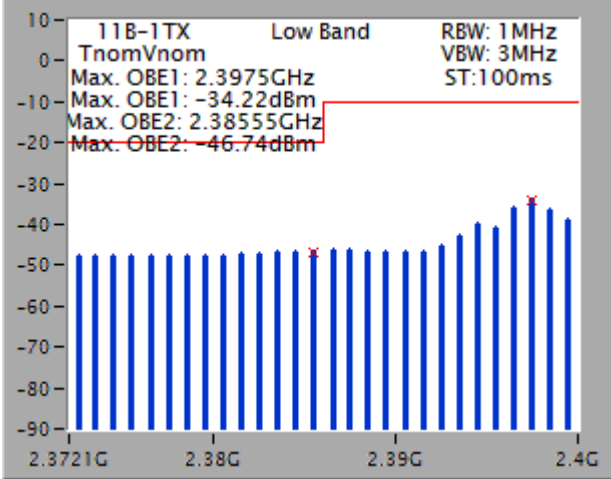
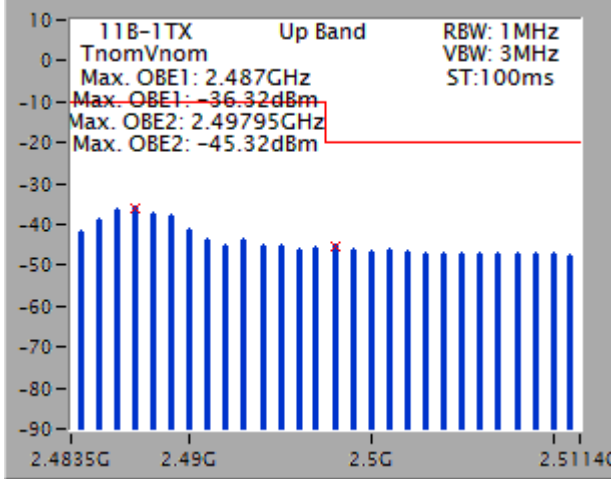
Test Configuration		1			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	11b/1Mbps	2412	2397.50	-34.22	-10
T _{nom} V _{nom}	11b/1Mbps	2472	2487.00	-36.32	-10
T _{nom} V _{nom}	11b/1Mbps	2412	2385.55	-46.74	-20
T _{nom} V _{nom}	11b/1Mbps	2472	2497.95	-45.32	-20
Low Band			Up Band		
					

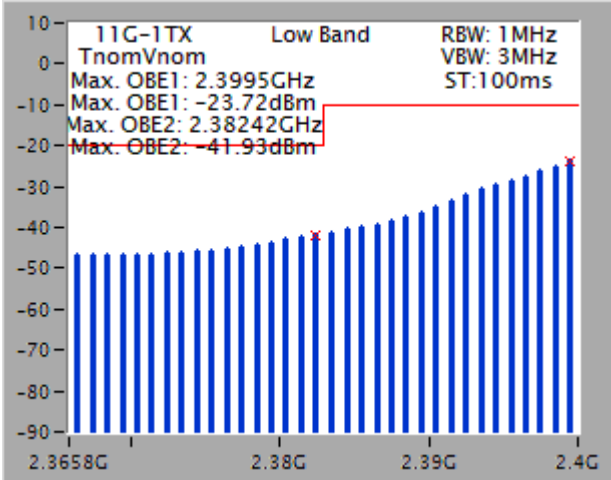
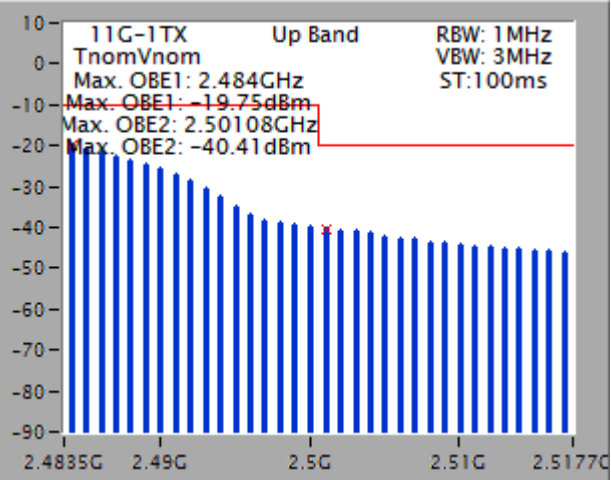
Test Configuration		1			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	11g/6Mbps	2412	2399.50	-23.72	-10
T _{nom} V _{nom}	11g/6Mbps	2472	2484.00	-19.75	-10
T _{nom} V _{nom}	11g/6Mbps	2412	2382.42	-41.93	-20
T _{nom} V _{nom}	11g/6Mbps	2472	2501.08	-40.41	-20
Low Band			Up Band		
					

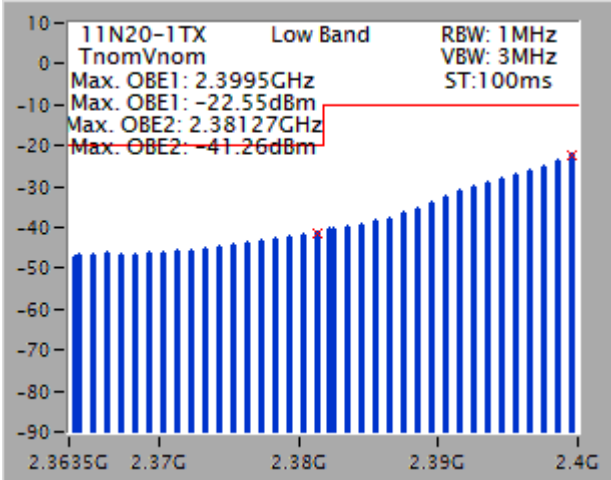
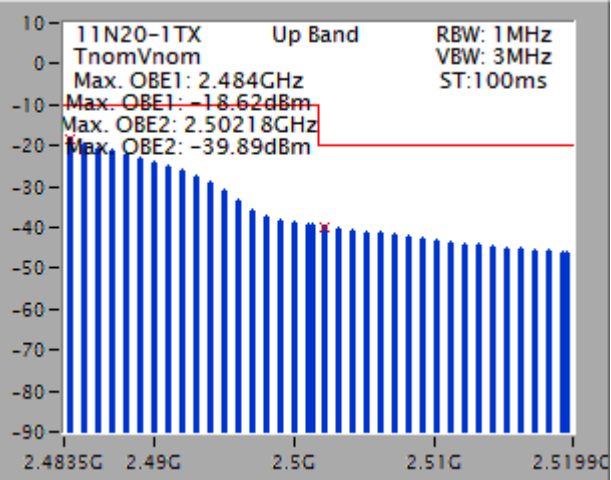
Test Configuration		1			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	HT20/MCS 0	2412	2399.50	-22.55	-10
T _{nom} V _{nom}	HT20/MCS 0	2472	2484.00	-18.62	-10
T _{nom} V _{nom}	HT20/MCS 0	2412	2381.27	-41.26	-20
T _{nom} V _{nom}	HT20/MCS 0	2472	2502.18	-39.89	-20
Low Band			Up Band		
 11N20-1TX Low Band RBW: 1MHz TnomVnom VBW: 3MHz ST:100ms Max. OBE1: 2.3995GHz Max. OBE2: 2.38127GHz			 11N20-1TX Up Band RBW: 1MHz TnomVnom VBW: 3MHz ST:100ms Max. OBE1: 2.484GHz Max. OBE2: 2.50218GHz		

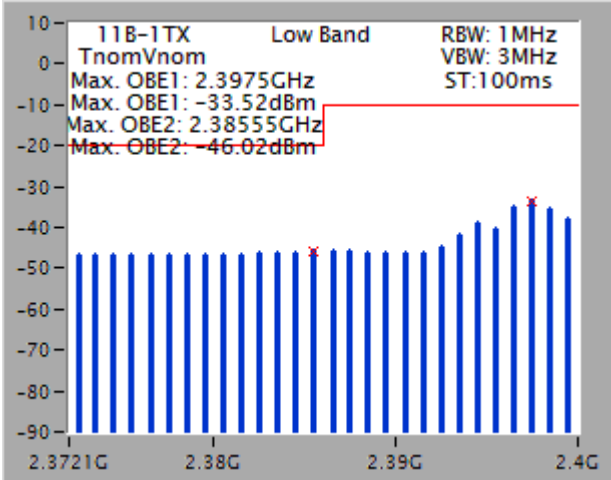
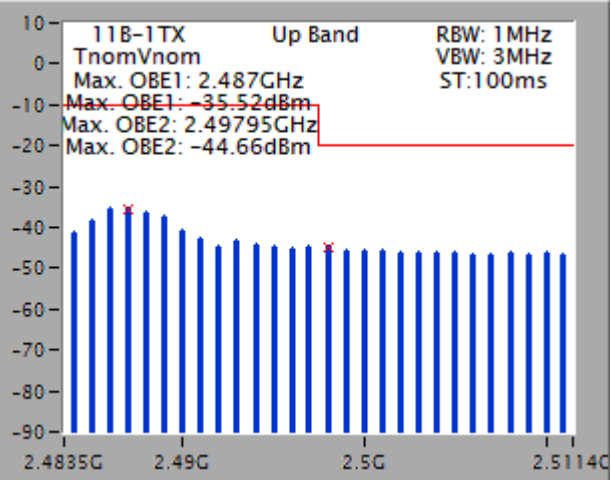
Test Configuration		2			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	11b/1Mbps	2412	2397.50	-33.52	-10
T _{nom} V _{nom}	11b/1Mbps	2472	2487.00	-35.52	-10
T _{nom} V _{nom}	11b/1Mbps	2412	2385.55	-46.02	-20
T _{nom} V _{nom}	11b/1Mbps	2472	2497.95	-44.66	-20
Low Band			Up Band		
 11B-1TX Low Band RBW: 1MHz TnomVnom Max. OBE1: 2.3975GHz Max. OBE1: -33.52dBm Max. OBE2: 2.38555GHz Max. OBE2: -46.02dBm			 11B-1TX Up Band RBW: 1MHz TnomVnom Max. OBE1: 2.487GHz Max. OBE1: -35.52dBm Max. OBE2: 2.49795GHz Max. OBE2: -44.66dBm		

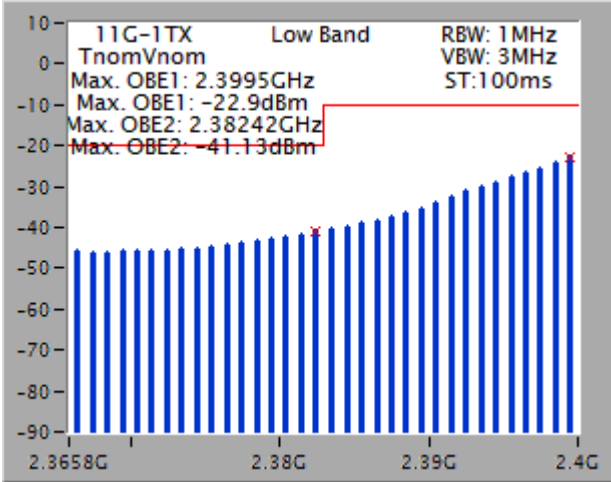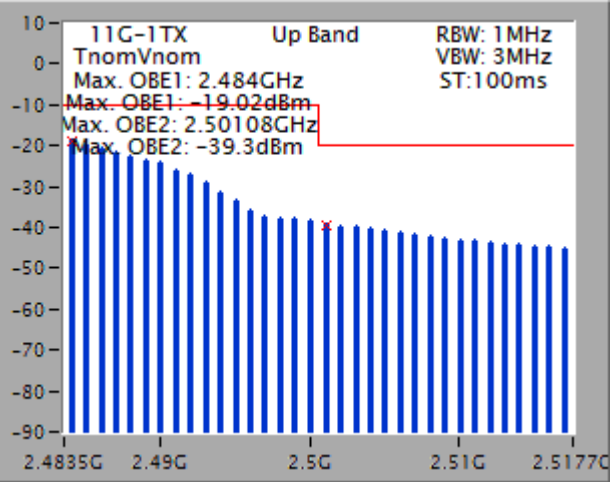Test Configuration		2			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	11g/6Mbps	2412	2399.50	-22.90	-10
T _{nom} V _{nom}	11g/6Mbps	2472	2484.00	-19.02	-10
T _{nom} V _{nom}	11g/6Mbps	2412	2382.42	-41.13	-20
T _{nom} V _{nom}	11g/6Mbps	2472	2501.08	-39.3	-20
Low Band			Up Band		
 11G-1TX Low Band RBW: 1MHz TnomVnom Max. OBE1: 2.3995GHz Max. OBE1: -22.9dBm Max. OBE2: 2.38242GHz Max. OBE2: -41.13dBm VBW: 3MHz ST:100ms			 11G-1TX Up Band RBW: 1MHz TnomVnom Max. OBE1: 2.484GHz Max. OBE1: -19.02dBm Max. OBE2: 2.50108GHz Max. OBE2: -39.3dBm VBW: 3MHz ST:100ms		

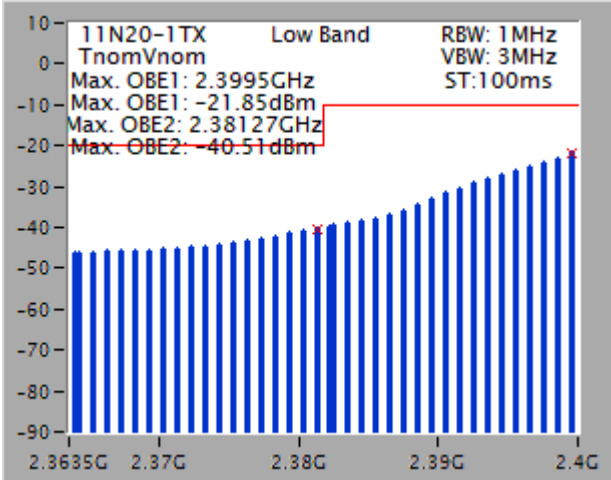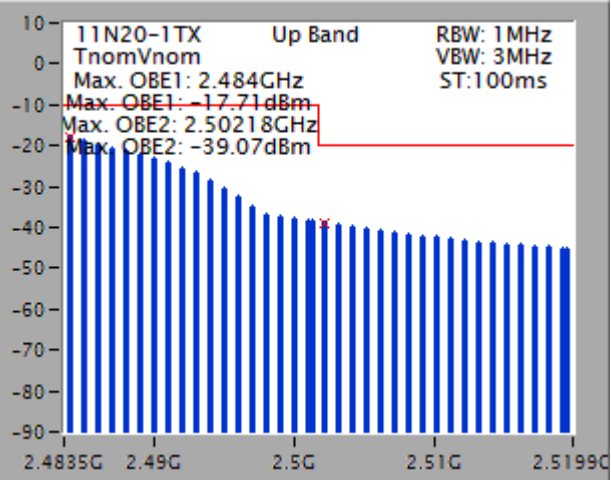Test Configuration		2			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	HT20/MCS 0	2412	2399.50	-21.85	-10
T _{nom} V _{nom}	HT20/MCS 0	2472	2484.00	-17.71	-10
T _{nom} V _{nom}	HT20/MCS 0	2412	2381.27	-40.51	-20
T _{nom} V _{nom}	HT20/MCS 0	2472	2502.18	-39.07	-20
Low Band			Up Band		
 11N20-1TX Low Band RBW: 1MHz TnomVnom VBW: 3MHz ST:100ms Max. OBE1: 2.3995GHz Max. OBE2: 2.38127GHz Max. OBE1: -21.85dBm Max. OBE2: -40.51dBm			 11N20-1TX Up Band RBW: 1MHz TnomVnom VBW: 3MHz ST:100ms Max. OBE1: 2.484GHz Max. OBE2: 2.50218GHz Max. OBE1: -17.71dBm Max. OBE2: -39.07dBm		

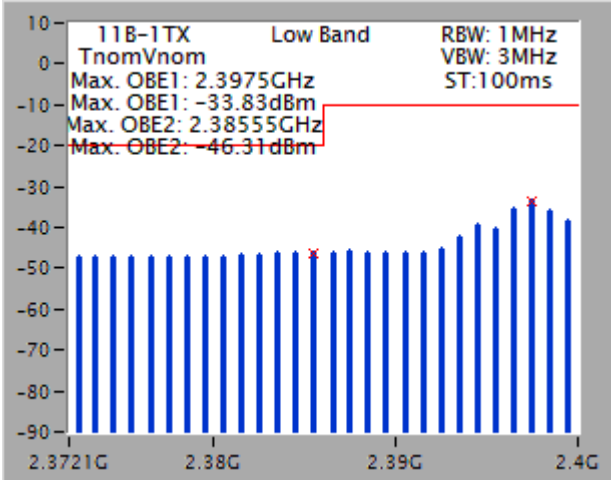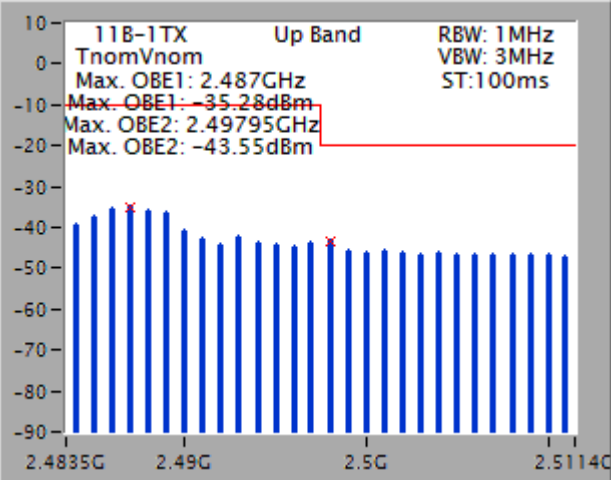Test Configuration		3			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	11b/1Mbps	2412	2397.50	-33.83	-10
T _{nom} V _{nom}	11b/1Mbps	2472	2487.00	-35.28	-10
T _{nom} V _{nom}	11b/1Mbps	2412	2385.55	-46.31	-20
T _{nom} V _{nom}	11b/1Mbps	2472	2497.95	-43.55	-20
Low Band			Up Band		
					

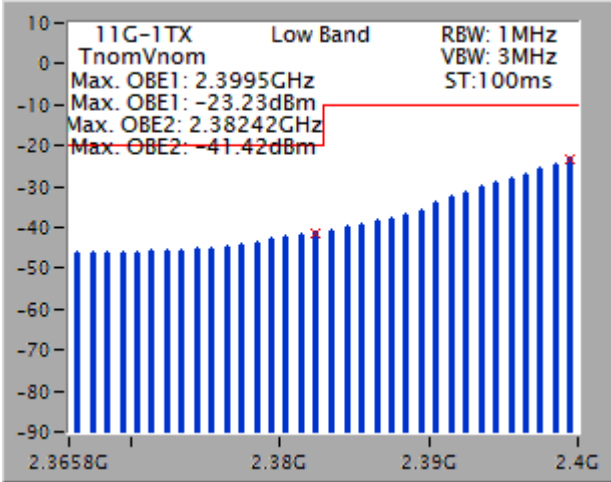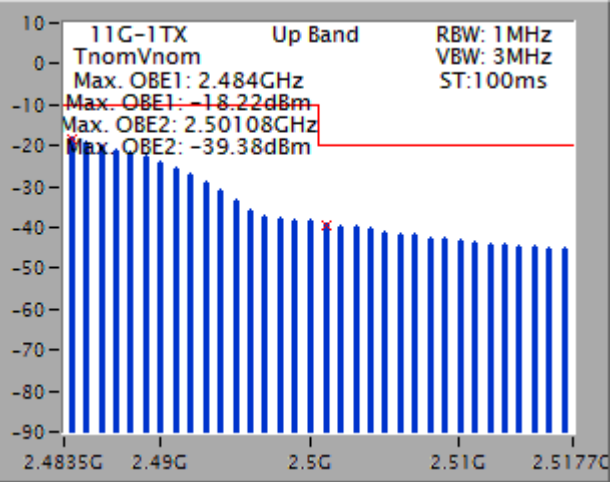Test Configuration		3			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	11g/6Mbps	2412	2399.50	-23.23	-10
T _{nom} V _{nom}	11g/6Mbps	2472	2484.00	-18.22	-10
T _{nom} V _{nom}	11g/6Mbps	2412	2382.42	-41.42	-20
T _{nom} V _{nom}	11g/6Mbps	2472	2501.08	-39.38	-20
Low Band			Up Band		
 11G-1TX Low Band RBW: 1MHz TnomVnom VBW: 3MHz ST:100ms Max. OBE1: 2.3995GHz Max. OBE1: -23.23dBm Max. OBE2: 2.38242GHz Max. OBE2: -41.42dBm			 11G-1TX Up Band RBW: 1MHz TnomVnom VBW: 3MHz ST:100ms Max. OBE1: 2.484GHz Max. OBE1: -18.22dBm Max. OBE2: 2.50108GHz Max. OBE2: -39.38dBm		

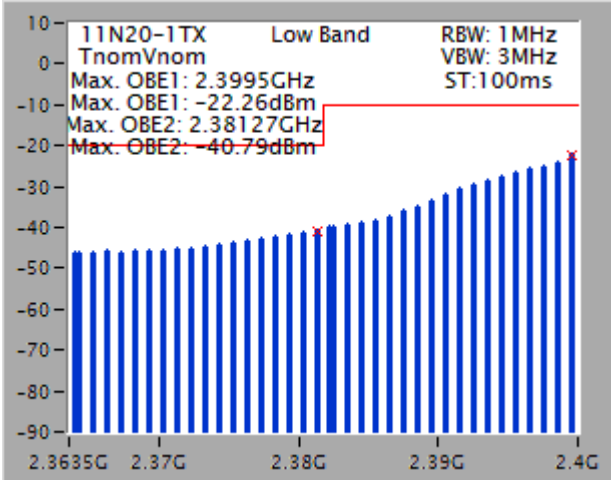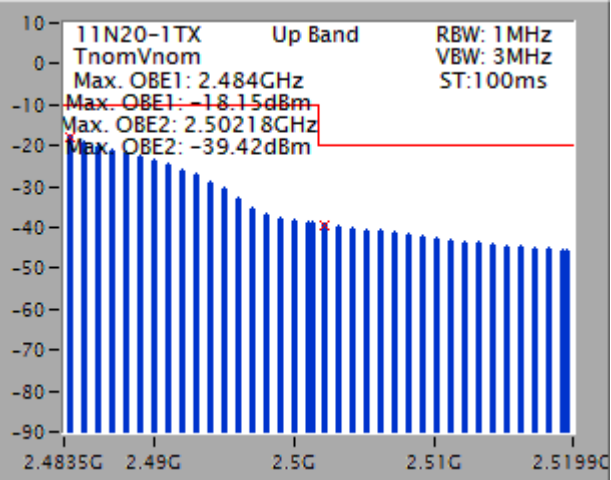Test Configuration		3			
Condition	Modulation Mode	Freq. (MHz)	OOB Freq. (MHz)	OOB Emissions (dBm)	Limit (dBm)
T _{nom} V _{nom}	HT20/MCS 0	2412	2399.50	-22.26	-10
T _{nom} V _{nom}	HT20/MCS 0	2472	2484.00	-18.15	-10
T _{nom} V _{nom}	HT20/MCS 0	2412	2381.27	-40.79	-20
T _{nom} V _{nom}	HT20/MCS 0	2472	2502.18	-39.42	-20
Low Band			Up Band		
					

3.5 Transmitter Unwanted Emissions in the Spurious Domain

3.5.1 Limit of Transmitter Unwanted Emissions in the Spurious Domain


Frequency Range (MHz)	Maximum power (dBm)	Bandwidth (kHz)
30 to 47	-36	100
47 to 74	-54	100
74 to 87.5	-36	100
87.5 to 118	-54	100
118 to 174	-36	100
174 to 230	-54	100
230 to 470	-36	100
470 to 862	-54	100
862 to 1000	-36	100
1000 to 12750	-30	1000

3.5.2 Test Procedures


Reference to clause 5.4.9.2 of ETSI EN 300 328 V2.1.1 (2016-11).

3.5.3 Test Setup


Below 1GHz

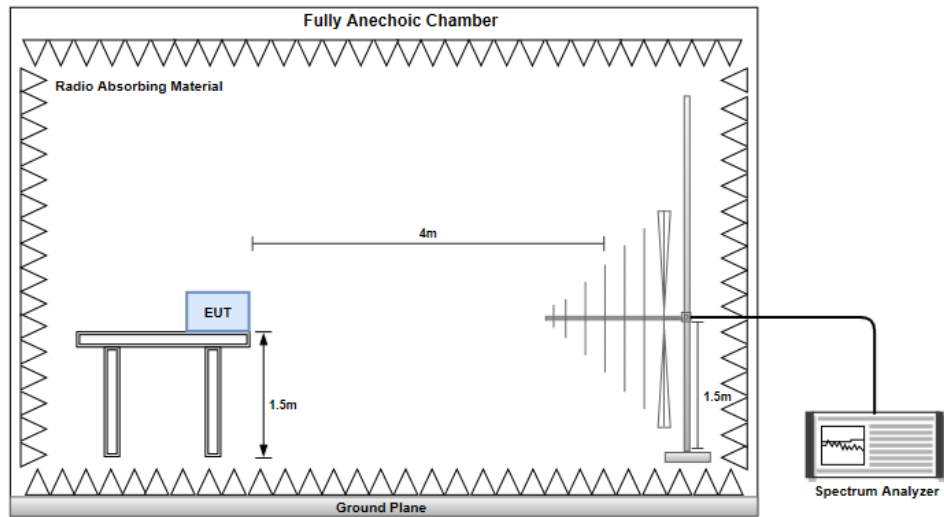

Above 1 GHz

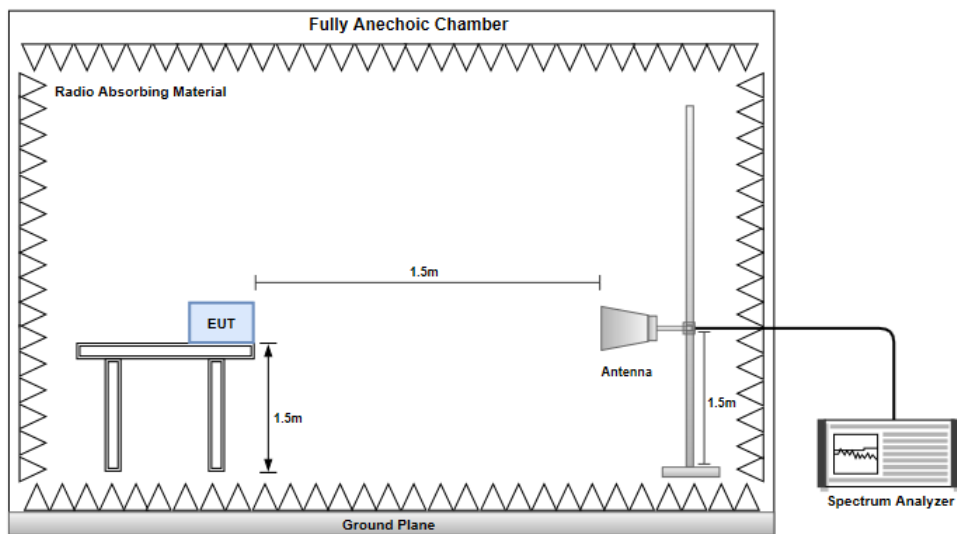


For Conducted Test



3.5.4 Radiated Results of Transmitter Spurious Emissions (Below 1GHz)

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Horizontal		
</			

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		

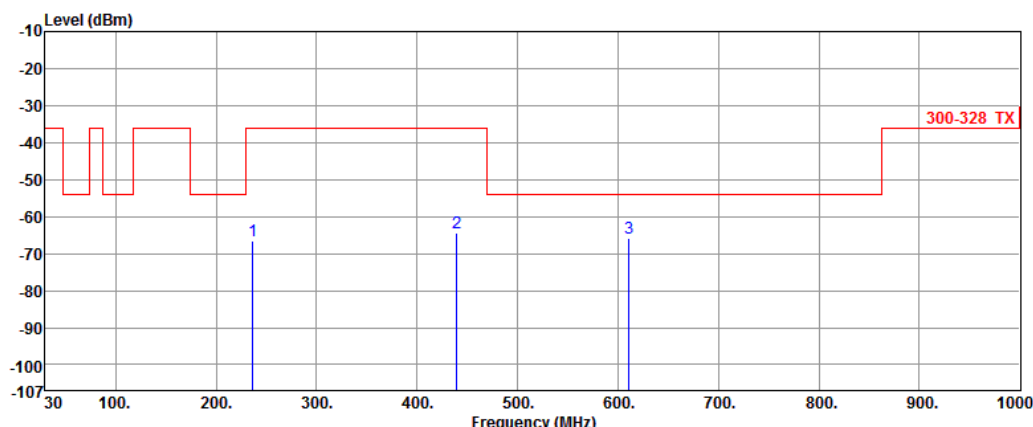


	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	236.61	-66.72	-36.00	-30.72	-2.79	-63.93
2	439.34	-64.25	-36.00	-28.25	2.49	-66.74
3	611.03	-65.86	-54.00	-11.86	6.25	-72.11

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11g	Test Freq. (MHz)	2472
Polarization	Vertical		

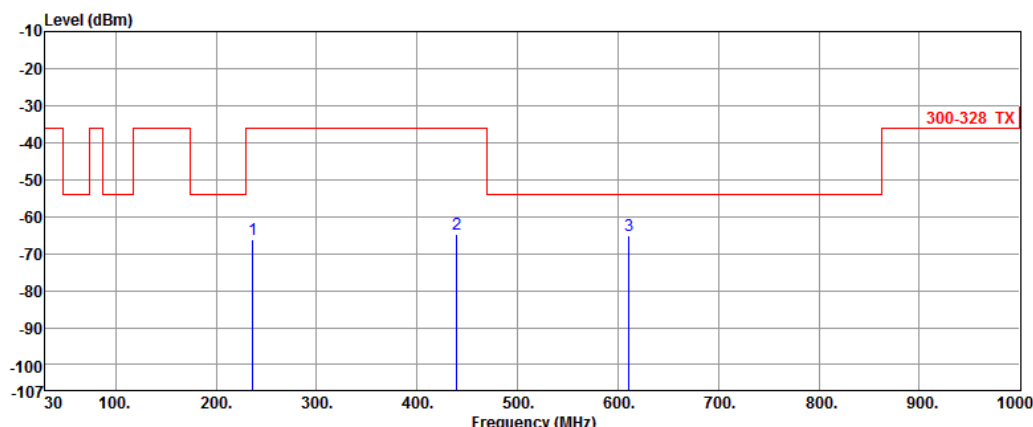


Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 236.23	-66.12	-36.00	-30.12	-2.78	-63.34
2 439.43	-64.65	-36.00	-28.65	2.49	-67.14
3 611.20	-65.24	-54.00	-11.24	6.25	-71.49

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

3.5.5 Radiated Results of Transmitter Spurious Emissions (Above 1GHz) for 802.11b

Modulation	11b	Test Freq. (MHz)	2412
Polarization	Horizontal		

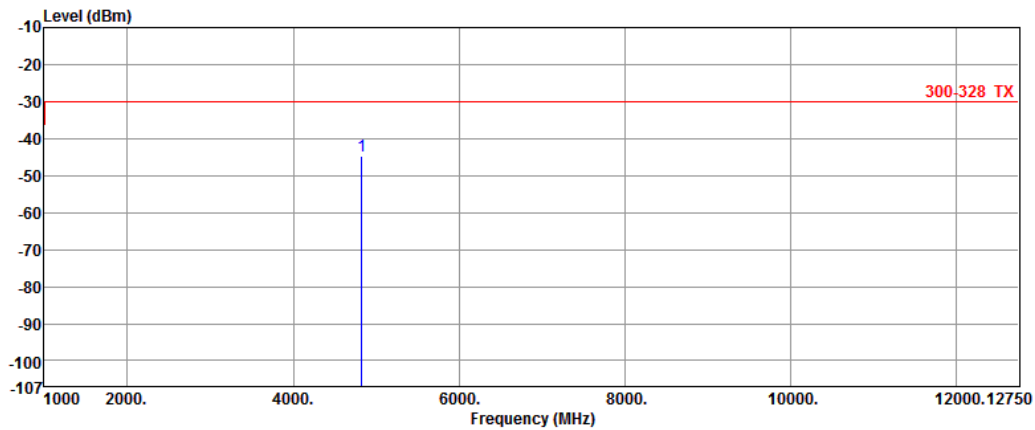

	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	4824.12	-44.65	-30.00	-14.65	11.62	-56.27

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11b	Test Freq. (MHz)	2472
Polarization	Horizontal		

Modulation	11b	Test Freq. (MHz)	2472
Polarization	Vertical		

Level (dBm)

<

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		

Modulation	11g	Test Freq. (MHz)	2472
Polarization	Horizontal		

Modulation	11g	Test Freq. (MHz)	2472
Polarization	Vertical		
<			

3.5.7 Radiated Results Transmitter Spurious Emissions (Above 1GHz) for 802.11n HT 20

Modulation	HT20	Test Freq. (MHz)	2412
Polarization	Horizontal		

Modulation	HT20	Test Freq. (MHz)	2412
Polarization	Vertical		

Level (dBm)

</

Modulation	HT20	Test Freq. (MHz)	2472
Polarization	Horizontal		

Level (dBm)

</


Modulation	HT20	Test Freq. (MHz)	2472
Polarization	Vertical		

3.5.8 Conducted Results of Transmitter Spurious Emissions (Below 1GHz)

Modulation	11g	Test Freq. (MHz)	2412
Level (dBm)			

Modulation	11g	Test Freq. (MHz)	2472
Level (dBm) </			


Modulation	11g	Test Freq. (MHz)	2412
------------	-----	------------------	------

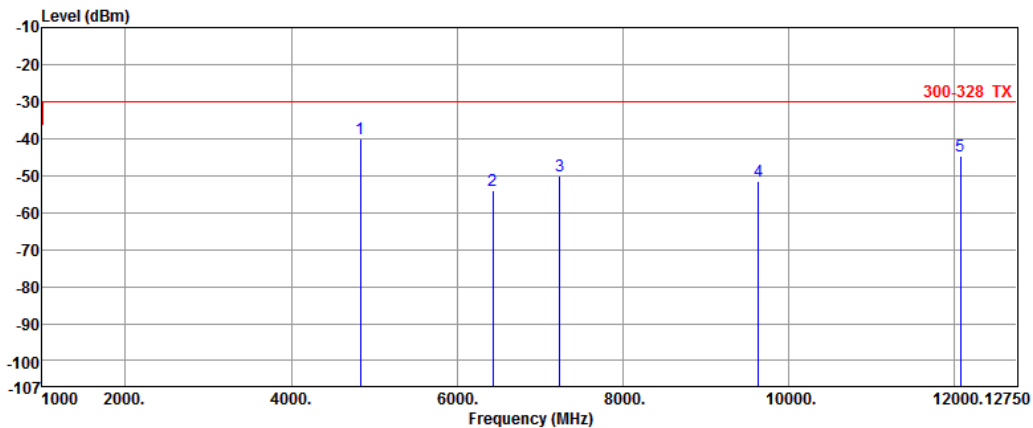

Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 4830.50	-40.15	-30.00	-10.15	0.00	-40.15
2 6428.50	-54.03	-30.00	-24.03	0.00	-54.03
3 7239.25	-50.09	-30.00	-20.09	0.00	-50.09
4 9636.25	-51.58	-30.00	-21.58	0.00	-51.58
5 12068.50	-44.76	-30.00	-14.76	0.00	-44.76

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)
 Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11g	Test Freq. (MHz)	2472
------------	-----	------------------	------

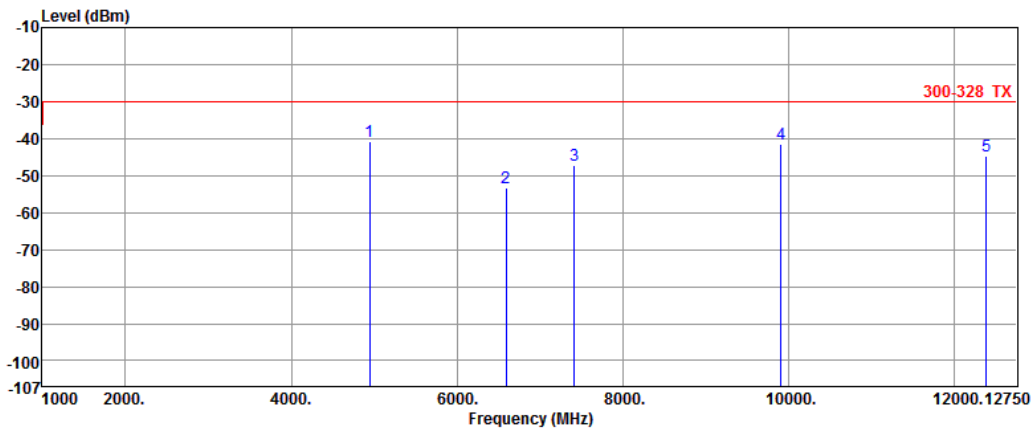

	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	4948.00	-40.80	-30.00	-10.80	0.00	-40.80
2	6593.00	-53.22	-30.00	-23.22	0.00	-53.22
3	7415.50	-47.20	-30.00	-17.20	0.00	-47.20
4	9906.50	-41.40	-30.00	-11.40	0.00	-41.40
5	12385.75	-44.77	-30.00	-14.77	0.00	-44.77

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)
 Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

3.5.10 Conducted Results of Transmitter Spurious Emissions (Above 1GHz) for 802.11n HT 20

Modulation	HT20	Test Freq. (MHz)	2412
Level (dBm)			

Modulation	HT20	Test Freq. (MHz)	2472
</			

4 Receiver Test Results

4.1 Receiver Spurious Emissions

4.1.1 Limit of Receiver Spurious Emissions


Frequency Range	Maximum power (dBm)	Measurement bandwidth (kHz)
30 MHz to 1 GHz	-57	100
Above 1 GHz to 12.75 GHz	-47	1000

4.1.2 Test Procedures


Reference to clause 5.4.10.2 of ETSI EN 300 328 V2.1.1 (2016-11).

4.1.3 Test Setup


Below 1GHz

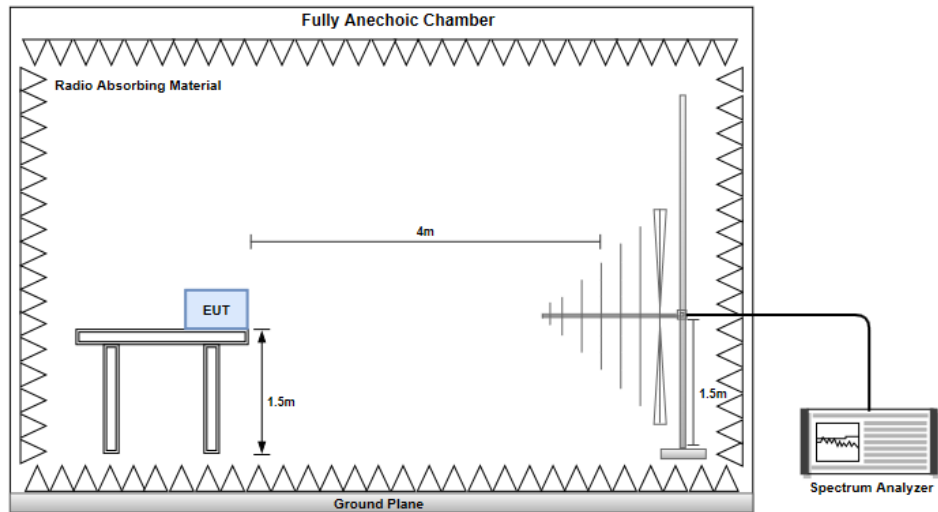

Above 1 GHz

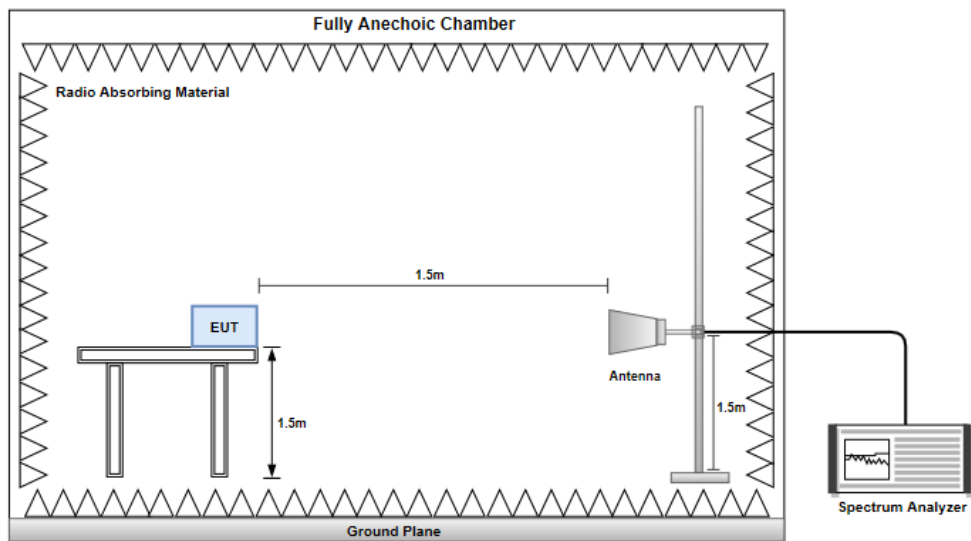


For Conducted Test



4.1.4 Radiated Results of Receiver Spurious Emissions (Below 1GHz)

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Horizontal		

Modulation	11g	Test Freq. (MHz)	2472
Polarization	Horizontal		

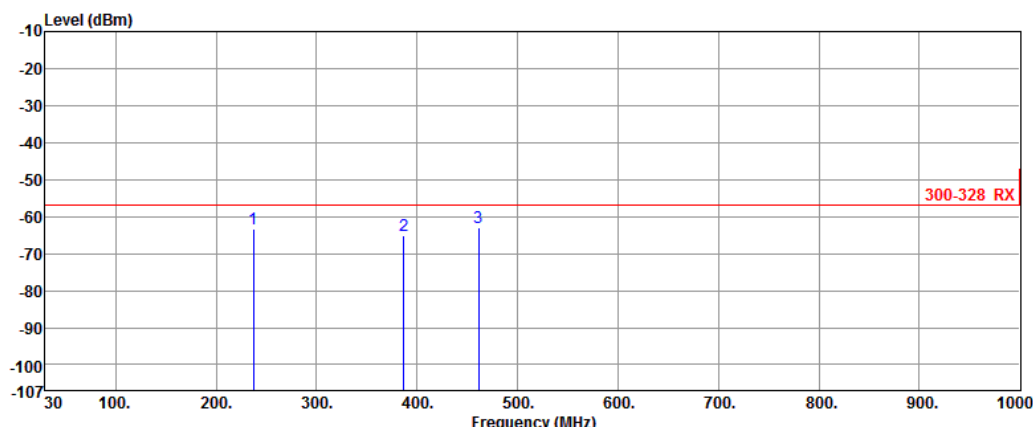


Freq.	Measured value	Limit	Margin	Factor	Reading	
MHz	dBm	dBm	dB	dB	dBm	
1	236.90	-63.24	-57.00	-6.24	-1.90	-61.34
2	386.53	-65.22	-57.00	-8.22	0.66	-65.88
3	461.35	-63.11	-57.00	-6.11	2.48	-65.59

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11g	Test Freq. (MHz)	2472
Polarization	Vertical		

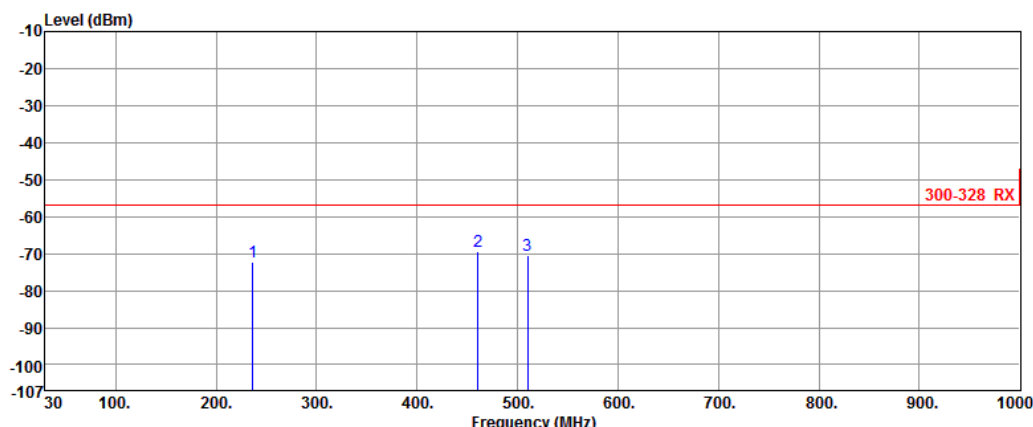

	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	236.57	-72.35	-57.00	-15.35	-2.79	-69.56
2	460.45	-69.43	-57.00	-12.43	2.75	-72.18
3	510.24	-70.34	-57.00	-13.34	3.06	-73.40

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

4.1.5 Receiver Radiated Unwanted Emissions (Above 1GHz)

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Horizontal		
Level (dBm) </			

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		

Level (dBm)

Modulation	11g	Test Freq. (MHz)	2472
Polarization	Horizontal		

Level (dBm)

<


Modulation	11g	Test Freq. (MHz)	2472
Polarization	Vertical		

Level (dBm)

4.1.6 Conducted Results of Receiver Spurious Emissions (Below 1GHz)

Modulation	11g	Test Freq. (MHz)	2412

Modulation	11g	Test Freq. (MHz)	2472
------------	-----	------------------	------

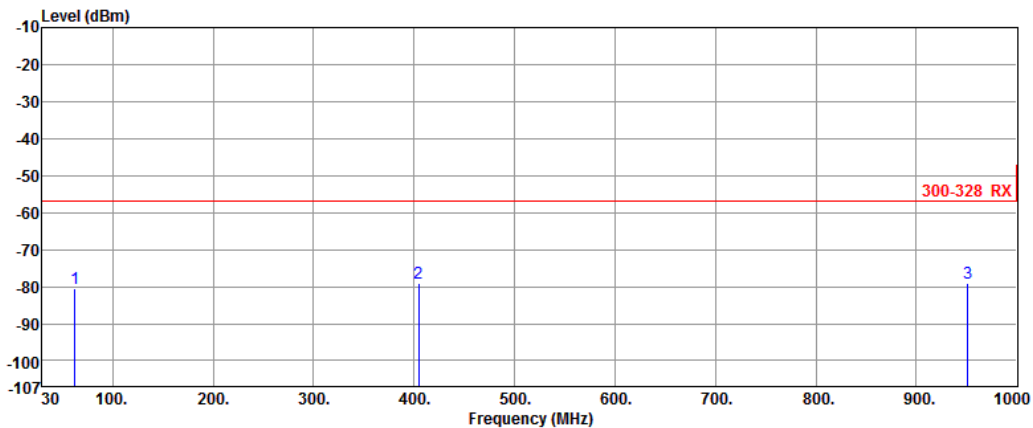


	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	62.01	-80.49	-57.00	-23.49	0.00	-80.49
2	404.42	-78.93	-57.00	-21.93	0.00	-78.93
3	951.50	-79.01	-57.00	-22.01	0.00	-79.01

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)
 Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

4.1.7 Conducted Results of Receiver Spurious Emissions (Above 1GHz) for 802.11g

Modulation	11g	Test Freq. (MHz)	2412

Modulation	11g	Test Freq. (MHz)	2472
------------	-----	------------------	------

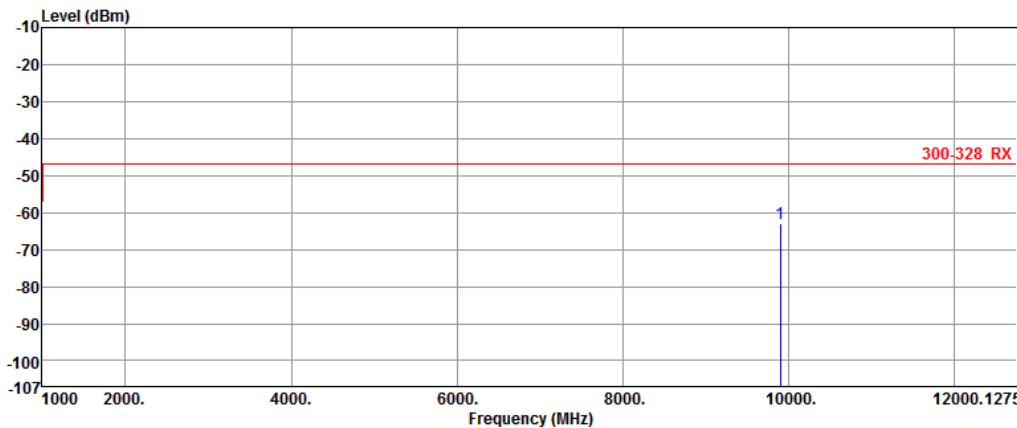

Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 9894.75	-63.08	-47.00	-16.08	0.00	-63.08

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

5 Adaptivity Test Results

5.1 Adaptivity and Unwanted Signal Parameters

5.1.1 Limit of Adaptivity and Unwanted Signal Parameters


Adaptivity and Unwanted Signal Limit	
☒	Only for adaptive systems and RF Output Power > 10 dBm
☐	Non-LBT based Detect and Avoid: • minimum remain unavailable = 1sec; • minimum Idle Period time = 100us; • maximum Channel Occupancy Time (COT) = 40ms • detection threshold level = $-70 \text{ dBm/MHz} + 10 \times \log_{10}(100\text{mW} / P_{\text{out}})$ (P_{out} in mW e.i.r.p);
☐	LBT based Detect and Avoid (Frame Based Equipment): • minimum Clear Channel Assessment (CCA) time = 18 us; • COT = 1 ms to 10 ms • Idle Period = 5% of COT • detection threshold level = $-70 \text{ dBm/MHz} + 10 \times \log_{10}(100\text{mW} / P_{\text{out}})$ (P_{out} in mW e.i.r.p);
☒	LBT based Detect and Avoid (Load Based Equipment with spectrum sharing mechanism IEEE Std.): • LBT based spectrum sharing mechanism may implement IEEE 802.11™-2012 [i.3] clause 9, clause 10, clause 16, clause 17, clause 19 and clause 20, or in IEEE 802.15.4™-2011 [i.4], clause 4, clause 5 and clause 8 • detection threshold level = $-70 \text{ dBm/MHz} + 10 \times \log_{10}(100\text{mW} / P_{\text{out}})$ (P_{out} in mW e.i.r.p);
☒	Short Control Signalling Transmissions: • Short Control Signalling Transmissions shall have a maximum duty cycle of 10 % within an observation period of 50 ms.

Unwanted Signal Parameters				
Equipment Type	Wanted Signal Mean Power from Companion Device	Blocking Signal Frequency (MHz)	Blocking Signal Mean power (dBm)	Type of Interfering Signal
LBT	sufficient to maintain the link (see note 2)	2395 or 2488,5 (see note 1)	-35 (see note 3)	CW
Non-LBT	-30 dBm			
Note 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. Note 2: A typical value which can be used in most cases is -50 dBm/MHz. Note 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.				

5.1.2 Test Procedures

Reference to clause 5.4.6.2 of ETSI EN 300 328 V2.1.1 (2016-11).


5.1.3 Test Setup

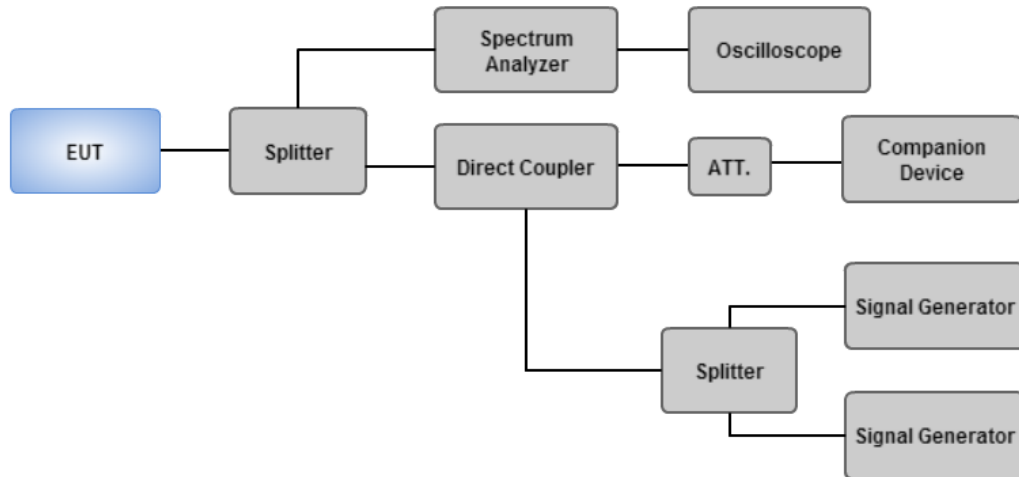


5.1.4 Test Result of Adaptivity 、Unwanted Signal and Short Control Signalling Transmissions

Adaptivity and Unwanted Signal Result						
EUT firmware / software version			23.3.3.5			
Adaptivity Detection Threshold Level (dBm)			-66.32			
Unwanted Signal Level (dBm)			-32.21			
Modulation Mode	Freq. (MHz)	Short Control Signalling Transmissions (ms)	Channel Occupancy Time (ms)	Idle Period Time (μs)	Adaptivity	Unwanted Signal Test Status
802.11b	2412	4.863	1.312	68	Pass	Pass
802.11b	2472	4.864	1.312	68		
802.11g	2412	4.865	12.482	41		
802.11g	2472	4.860	12.483	41		
802.11n (HT20)	2412	4.241	1.307	41		
802.11n (HT20)	2472	4.980	1.307	41		
Limit		< 5 ms	< 13 ms	>18μs		
Result		Complied				

5.1.5 Test Result of Adaptivity and Unwanted Signal Plots

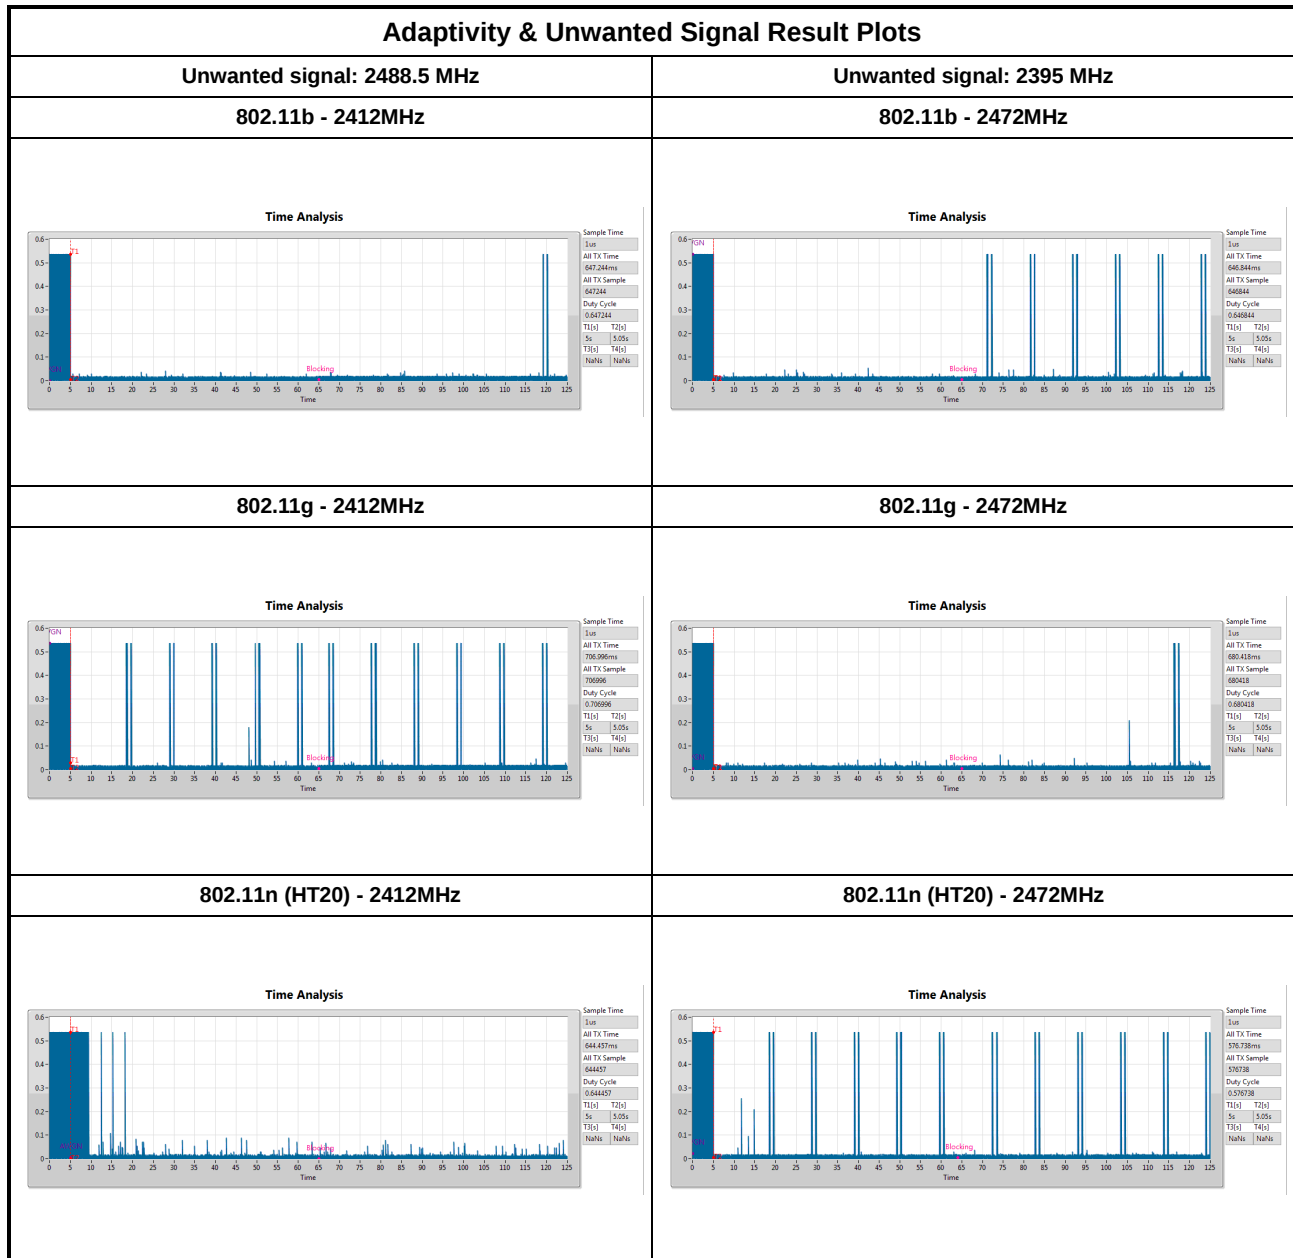


5.1.6 Test Result of Short Control Signalling Transmissions Plots

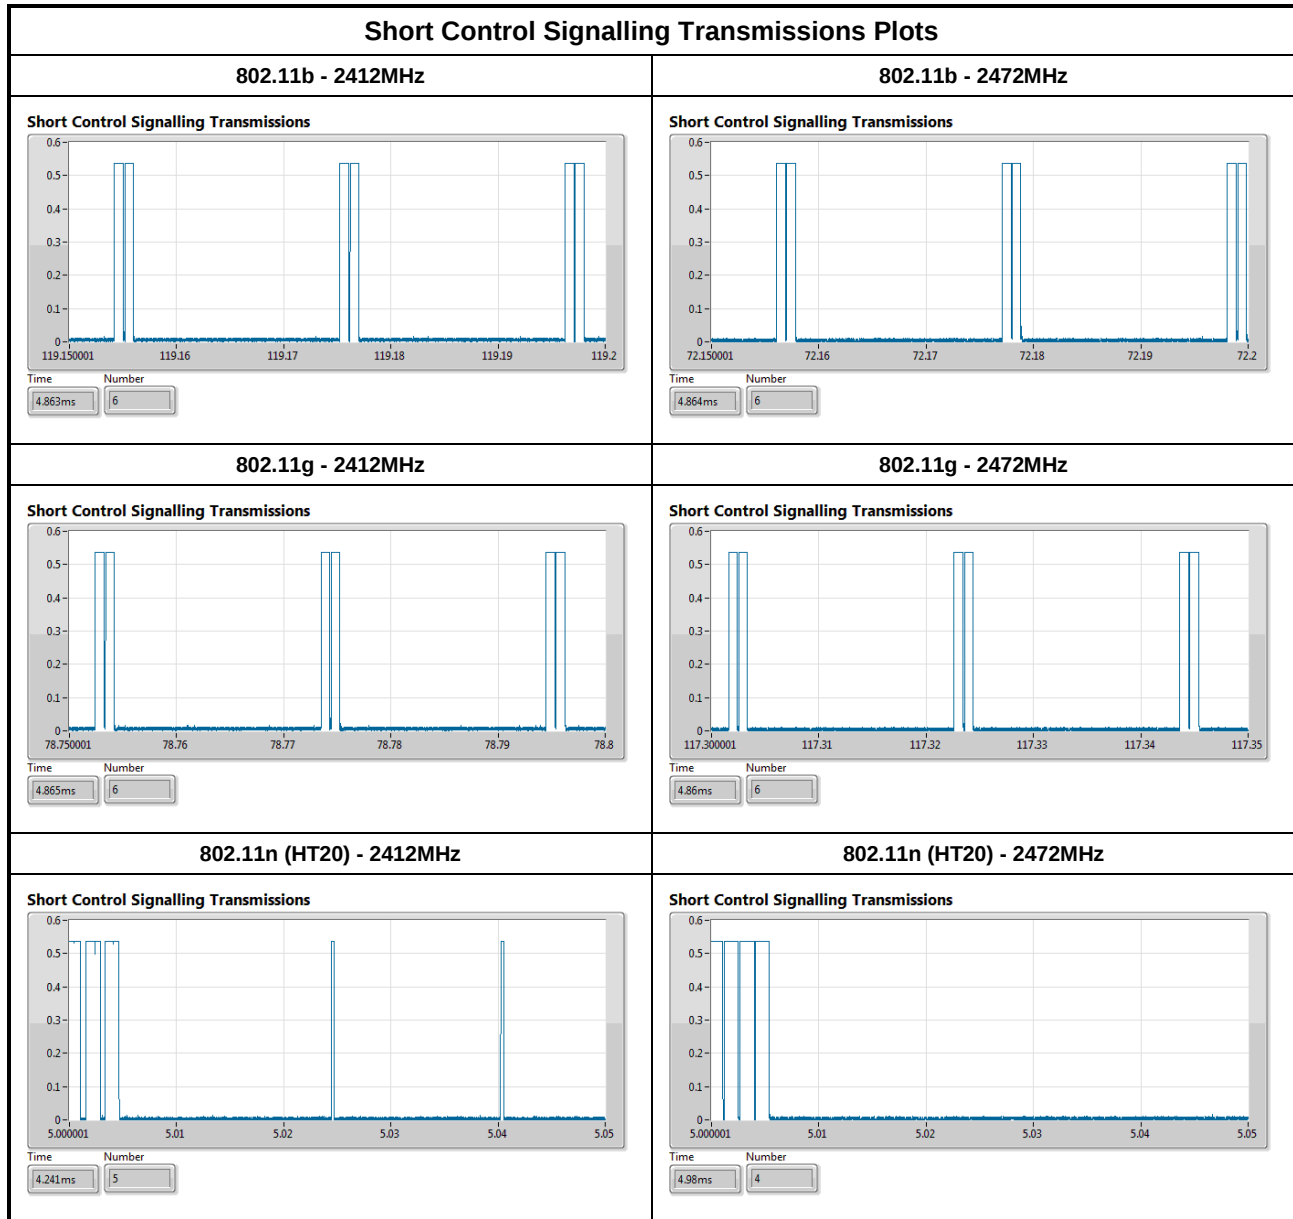

Channel Occupancy Time

802.11b - 2412MHz


Max On Time

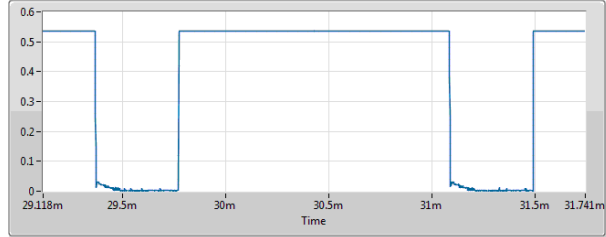

1.312ms

802.11b - 2472MHz


Max On Time

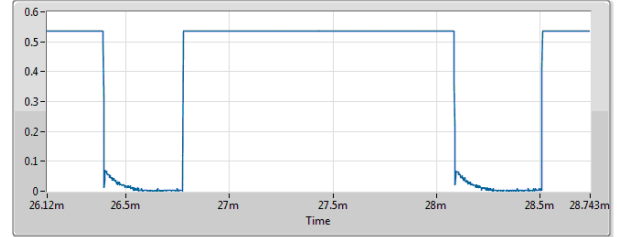

1.312ms

802.11g - 2412MHz


Max On Time

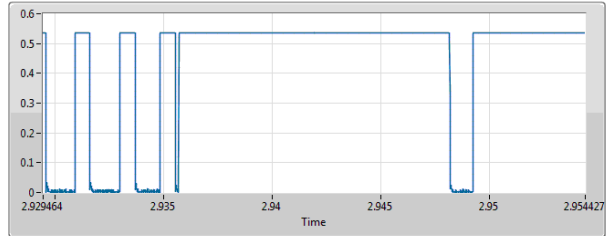

12.482ms

802.11g - 2472MHz


Max On Time

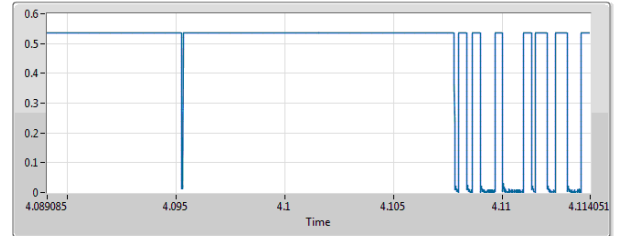

12.483ms

802.11n (HT20) - 2412MHz


Max On Time

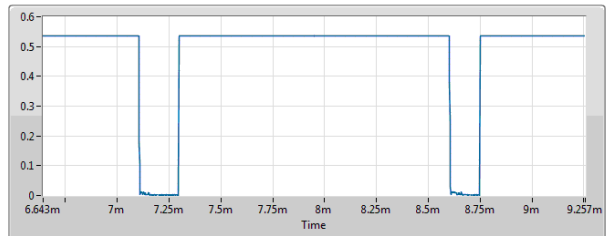

1.307ms

802.11n (HT20) - 2472MHz

Max On Time

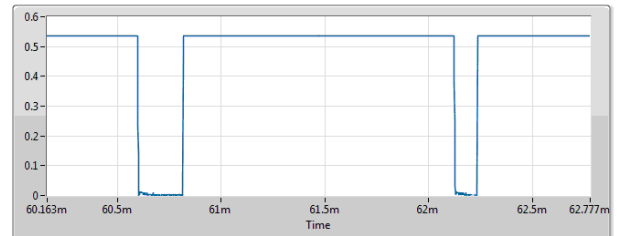


1.307ms

Idle Period Time

802.11b - 2412MHz


Min Off Time

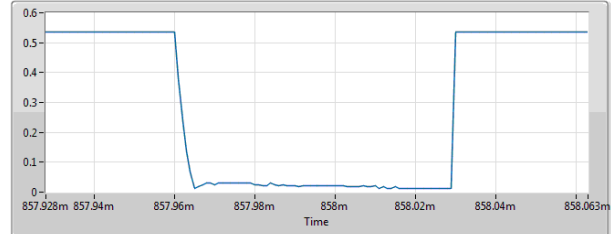

68us

802.11b - 2472MHz


Min Off Time

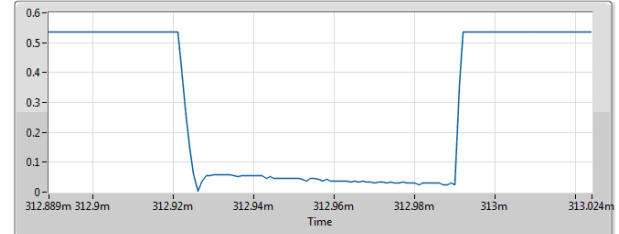

68us

802.11g - 2412MHz


Min Off Time

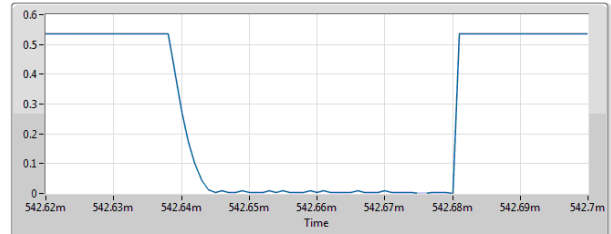

41us

802.11g - 2472MHz


Min Off Time

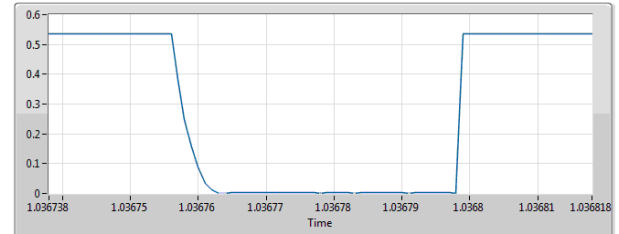

41us

802.11n (HT20) - 2412MHz


Min Off Time

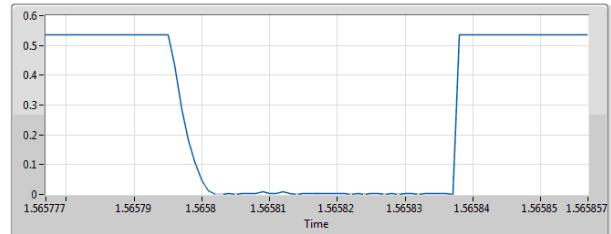

41us

802.11n (HT20) - 2472MHz

Min Off Time

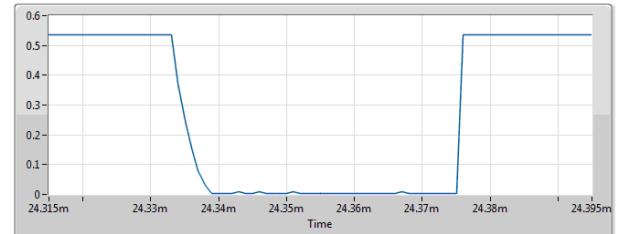

41us

6 Receiver Blocking Test Results

6.1 Receiver Blocking

6.1.1 Limit of Receiver Blocking

Receiver Blocking Parameters for Receiver Category 1 Equipment Limit			
Wanted Signal Mean Power from Companion Device (dBm)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (see Note 2)	Type of Blocking Signal
$P_{min} + 6 \text{ dB}$	2 380 2 503,5	-53	CW
$P_{min} + 6 \text{ dB}$	2 300 2 330 2 360	-47	CW
$P_{min} + 6 \text{ dB}$	2 523,5 2 553,5 2 583,5 2 613,5 2 643,5 2 673,5	-47	CW

Note 1: P_{min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria (The minimum performance criterion shall be a PER less than or equal to 10 %) in the absence of any blocking signal.

Note 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.

Receiver Blocking Parameters for Receiver Category 2 Equipment Limit			
Wanted Signal Mean Power from Companion Device (dBm)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (see Note 2)	Type of Blocking Signal
$P_{min} + 6 \text{ dB}$	2 380 2 503,5	-57	CW
$P_{min} + 6 \text{ dB}$	2 300 2 583,5	-47	CW

Note 1: P_{min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria (The minimum performance criterion shall be a PER less than or equal to 10 %) in the absence of any blocking signal.


Note 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.

Receiver Blocking Parameters for Receiver Category 3 Equipment Limit			
Wanted Signal Mean Power from Companion Device (dBm)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (see Note 2)	Type of Blocking Signal
$P_{\min} + 12 \text{ dB}$	2 380 2 503,5	-57	CW
$P_{\min} + 12 \text{ dB}$	2 300 2 583,5	-47	CW
Note 1: $P_{\min}$ is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria (The minimum performance criterion shall be a PER less than or equal to 10 %) in the absence of any blocking signal. Note 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.			

6.1.2 Test Procedures

Reference to clause 5.4.11.2 of ETSI EN 300 328 V2.1.1 (2016-11).


6.1.3 Test Setup

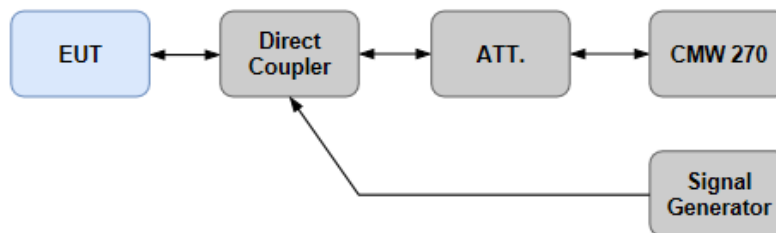

6.1.4 Test Result of Receiver Blocking




PER Minimum Performance Criteria	10 %		
Sensitivity Level	-90		dBm
Want Signal Mean Power form Companion Device (dBm)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	Test Result
-84	2380.0	-50.21	Pass
-84	2503.5		Pass
-84	2300.0	-44.21	Pass
-84	2330.0		Pass
-84	2360.0		Pass
-84	2523.5	-44.21	Pass
-84	2553.5		Pass
-84	2583.5		Pass
-84	2613.5		Pass
-84	2643.5		Pass
-84	2673.5		Pass

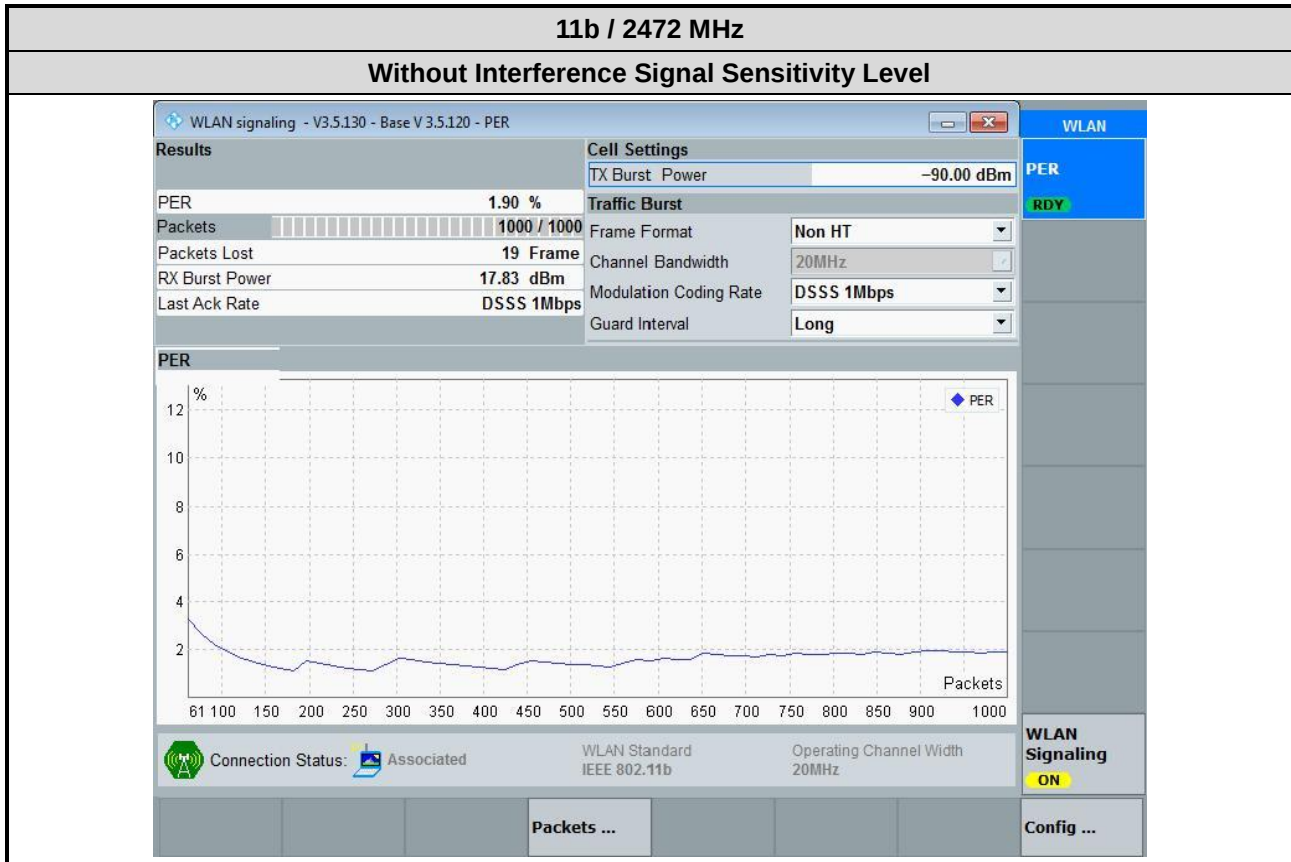

PER Minimum Performance Criteria	10 %		
Sensitivity Level	-90		dBm
Want Signal Mean Power form Companion Device (dBm)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	Test Result
-84	2380.0	-50.21	Pass
-84	2503.5		Pass
-84	2300.0	-44.21	Pass
-84	2330.0		Pass
-84	2360.0		Pass
-84	2523.5	-44.21	Pass
-84	2553.5		Pass
-84	2583.5		Pass
-84	2613.5		Pass
-84	2643.5		Pass
-84	2673.5		Pass

7 Photographs of the Test Configuration

Spurious Emission Test

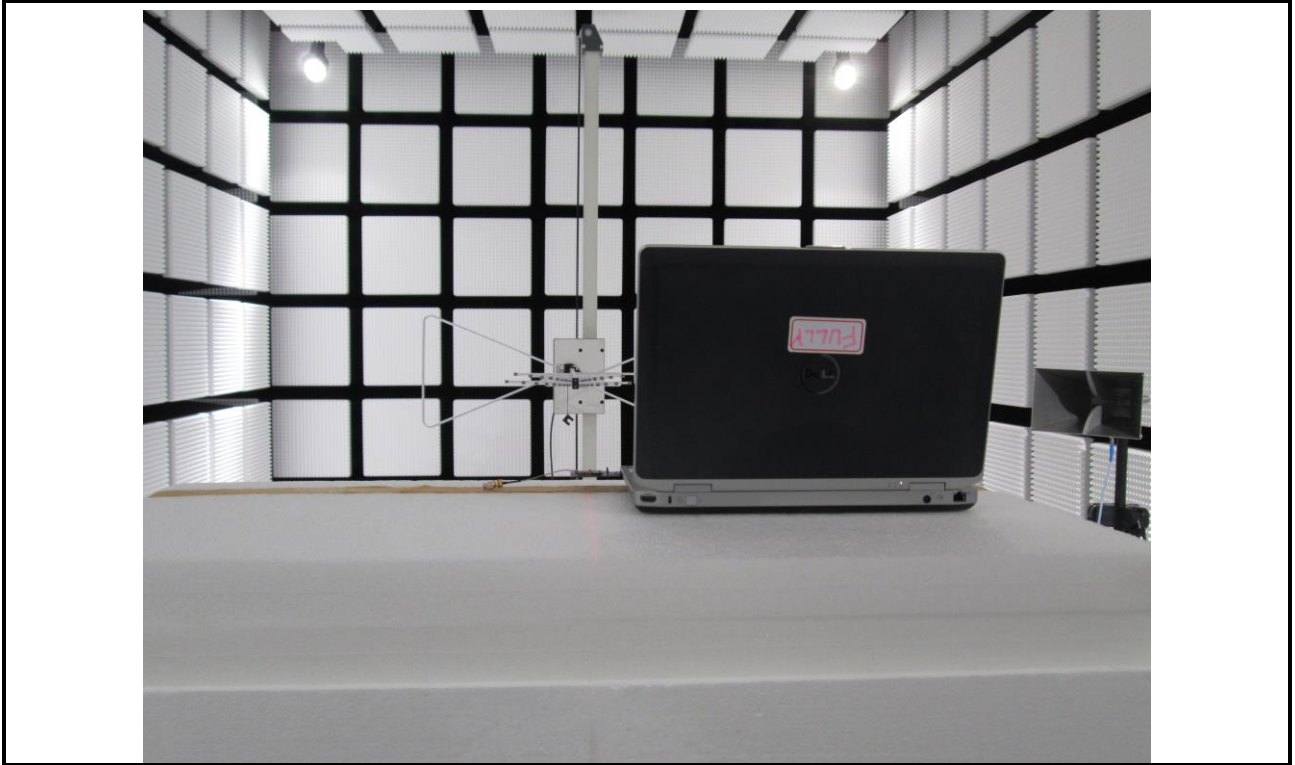


Spurious Emission Conducted Test



Adaptivity, Unwanted Signal and Short Control Signalling Transmissions Test



Receiver Blocking Test

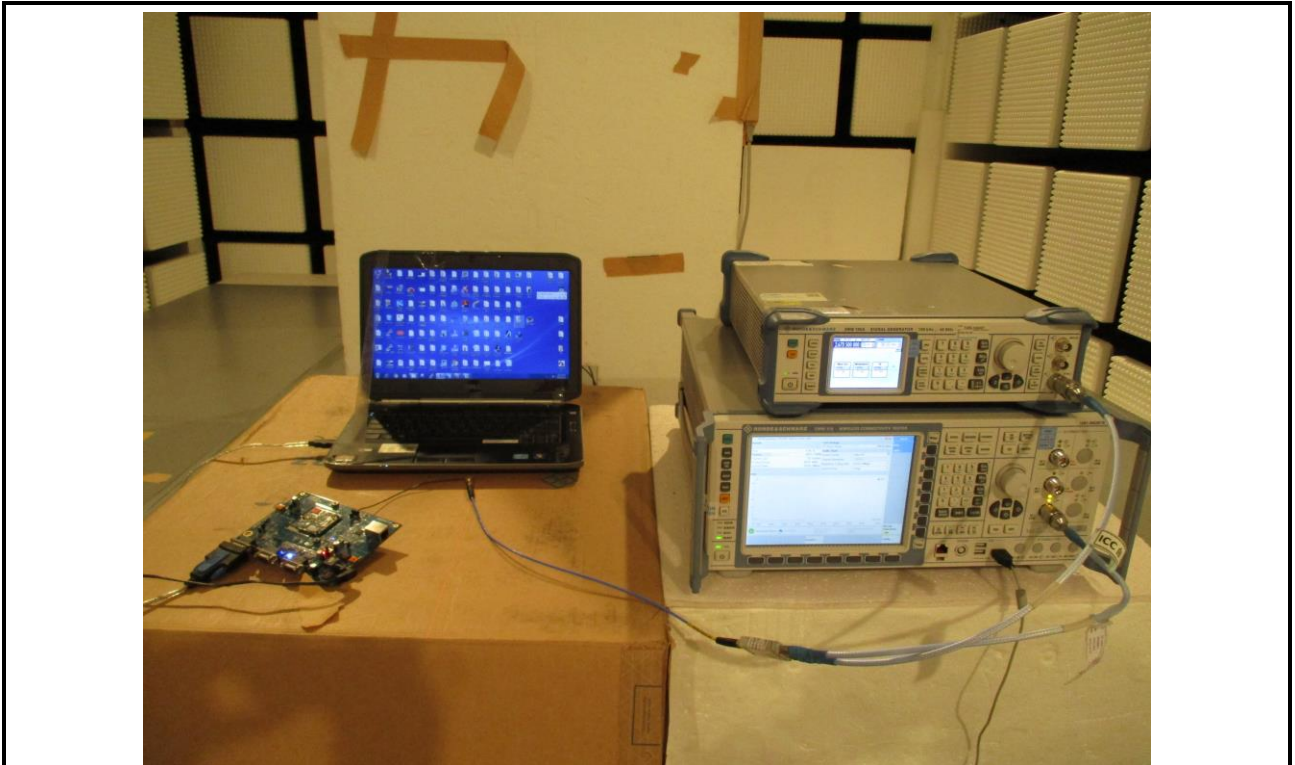

8 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==