

IC Reassessment Test Report

IC : 6616A-SDCMSD40NBT
Equipment : 802.11abgn (1X1) + Bluetooth (2.1) module
Model No. : SDC-MSD40NBT
Brand Name : Summit
Applicant : Summit Data Communications, Inc.
Address : 526 South Main Street Suite 805 Akron, OH
44311
Standard : RSS-210 Issue 8 December 2010
Received Date : Feb. 26, 2015
Tested Date : Mar. 27 ~ Mar. 31, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Testing Applied Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	Conducted Emissions.....	11
3.2	Transmitter Radiated and Band Edge Emissions	14
4	TEST LABORATORY INFORMATION	18

Release Record

Report No.	Version	Description	Issued Date
CR522601AI	Rev. 01	Initial issue	May 26, 2015

Summary of Test Results

IC Rules	Test Items	Measured	Result
8.8 of RSS-Gen	Conducted Emissions	[dBuV]: 0.513MHz 37.47 (Margin -8.53dB) - AV	Pass
A8.5 of RSS-210	Radiated Emissions	[dBuV/m at 3m]: 116.33 MHz 36.66 (Margin -6.84dB) - PK	Pass

1 General Description

1.1 Information

This report is issued for IC reassessment for changing value of some resistances and capacitances of Non-RF part. In this report, conducted emission and radiated emission below 1GHz tests had been re-tested and only its data was presented in the following sections.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5725-5850	a	5745-5805	149-161 [4]	1	6-54 Mbps
5725-5850	n (HT20)	5745-5805	149-161 [4]	1	MCS 0-7

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	Radiall Larsen	R380.500.314	Dipole	RP-TNC plug	5

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
--------------------------	------------------

1.1.4 Accessories

N/A

1.1.5 Support Units

Support Units		
No.	Equipment	Description
1	PDA	Brand Name: HP Model Name: HSTNH-L05C-BT
2	Adapter for PDA	Brand Name: N/A Model Name: 3A-041WE05 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.2A O/P: 5.0Vdc, 1.0A Power Line: 1.85m non-shielded cable w/o core

1.1.6 Channel List

802.11 a / HT20	
Channel	Frequency(MHz)
149	5745
153	5765
157	5785
161	5805

1.1.7 Test Tool and Duty Cycle

Test Tool	LRU, Version: 3.5.1.17		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11a	96.31%	0.16
	VHT20	95.26%	0.21

1.1.8 Power Setting


Modulation Mode	Test Frequency (MHz)	Power Set
11a	5745	100%
11a	5785	100%
11a	5805	100%
HT20	5745	100%
HT20	5785	100%
HT20	5805	100%

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	PDA	HP	HSTNH-L05C-BT	---	---
2	Testing board	---	---	---	---

Note: No.1 was supplied by applicant.

1.3 Test Setup Chart

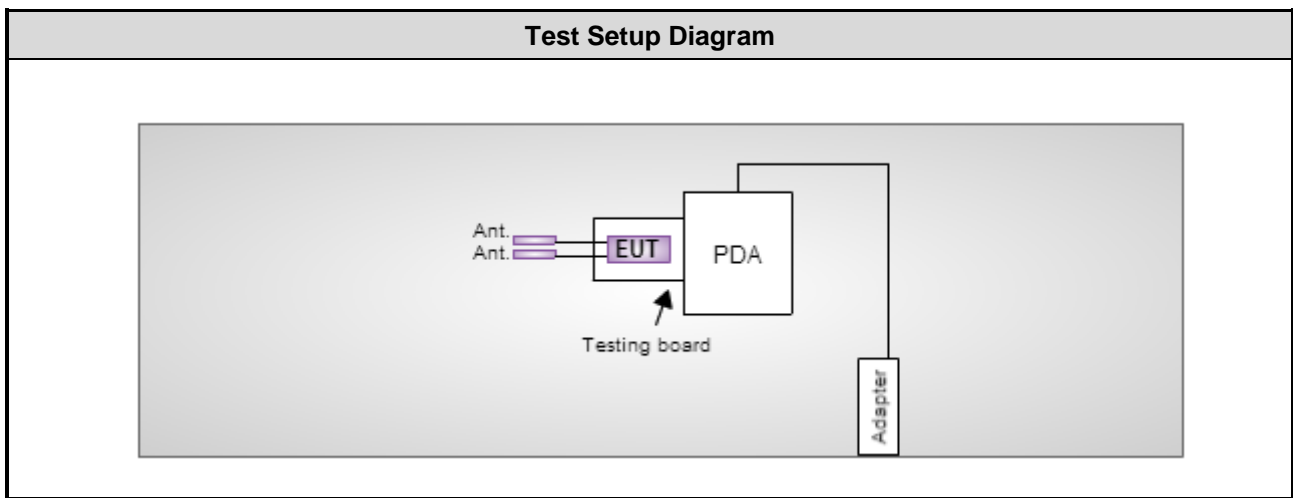

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test Date	Mar. 31, 2015				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2014	Nov. 25, 2015
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03CH02-WS)				
Test Date	Mar. 27, 2015				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015
Receiver	R&S	ESR3	101657	Jan. 15, 2015	Jan. 14, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Oct. 16, 2014	Oct. 15, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 14, 2014	Oct. 13, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Burgeon	BPA-530	100218	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Agilent	83017A	MY39501309	Sep. 29, 2014	Sep. 28, 2015
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 16, 2014	Dec. 15, 2015
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 16, 2014	Dec. 15, 2015
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 16, 2014	Dec. 15, 2015
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

RSS-210 Issue 8 December 2010

RSS-Gen Issue 4 November 2014

ANSI C63.10-2013

ANSI C63.4-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r02

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.62 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 66%	Kevin Ma
Radiated Emissions	03CH02-WS	20°C / 63%	Anderson Hung

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5805	MCS 0	---
Radiated Emissions ≤1GHz	11a	5805	MCS 0	---

NOTE: The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

Modulation	11a	Test Freq. (MHz)	5805
Power Phase	Line		

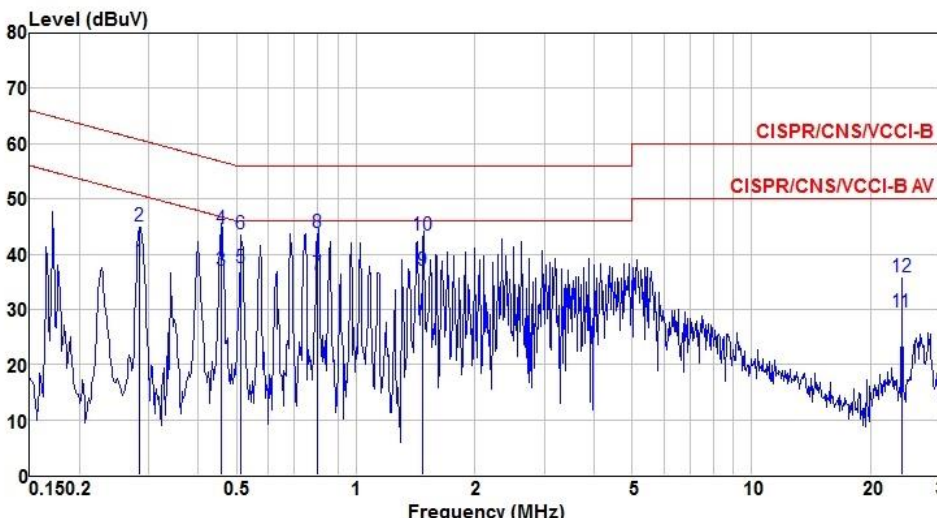


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.285	38.70	50.68	-11.98	38.39	0.21	0.10	Average
2	0.285	45.15	60.68	-15.53	44.84	0.21	0.10	QP
3	0.456	36.98	46.76	-9.78	36.69	0.17	0.12	Average
4	0.456	44.50	56.76	-12.26	44.21	0.17	0.12	QP
5*	0.513	37.47	46.00	-8.53	37.19	0.16	0.12	Average
6	0.513	43.61	56.00	-12.39	43.33	0.16	0.12	QP
7	0.798	36.29	46.00	-9.71	36.03	0.11	0.15	Average
8	0.798	43.88	56.00	-12.12	43.62	0.11	0.15	QP
9	1.480	37.11	46.00	-8.89	36.51	0.39	0.21	Average
10	1.480	43.47	56.00	-12.53	42.87	0.39	0.21	QP
11	24.000	29.42	50.00	-20.58	28.42	0.92	0.08	Average
12	24.000	35.86	60.00	-24.14	34.86	0.92	0.08	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation	11a	Test Freq. (MHz)	5805
-------------------	-----	-------------------------	------

Power Phase	Neutral
--------------------	---------

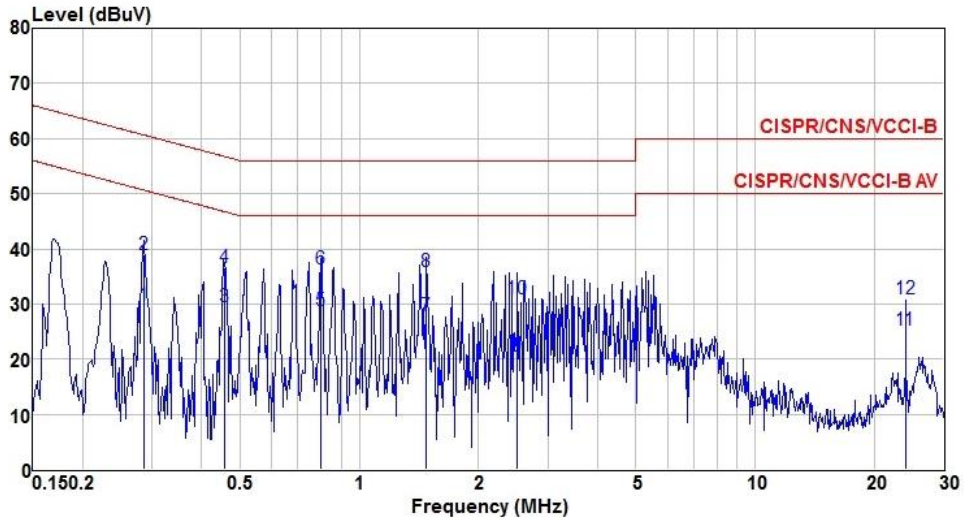

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.285	29.63	50.67	-21.04	29.35	0.18	0.10	Average
2	0.285	38.85	60.67	-21.82	38.57	0.18	0.10	QP
3	0.455	29.42	46.78	-17.36	29.15	0.15	0.12	Average
4	0.455	36.52	56.78	-20.26	36.25	0.15	0.12	QP
5*	0.798	28.80	46.00	-17.20	28.41	0.24	0.15	Average
6	0.798	36.35	56.00	-19.65	35.96	0.24	0.15	QP
7	1.480	27.93	46.00	-18.07	27.48	0.24	0.21	Average
8	1.480	35.96	56.00	-20.04	35.51	0.24	0.21	QP
9	2.506	20.52	46.00	-25.48	19.87	0.39	0.26	Average
10	2.506	30.99	56.00	-25.01	30.34	0.39	0.26	QP
11	24.000	25.14	50.00	-24.86	24.08	0.98	0.08	Average
12	24.000	31.03	60.00	-28.97	29.97	0.98	0.08	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Transmitter Radiated and Band Edge Emissions

3.2.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


3.2.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.


3.2.3 Test Setup

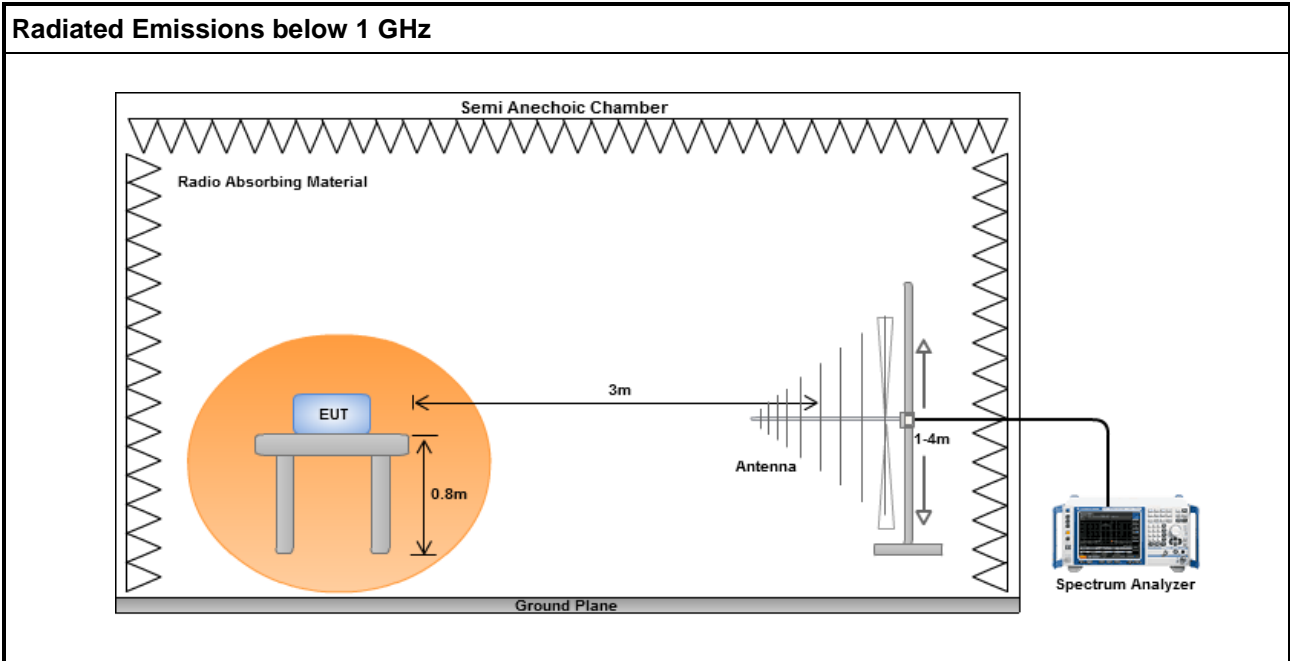

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

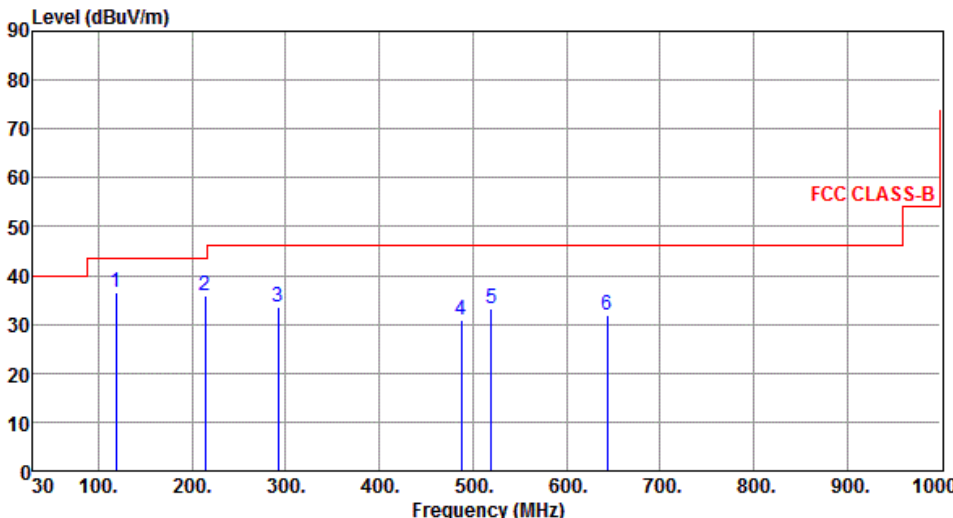Modulation	11a	Test Freq. (MHz)	5805						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	118.27	36.38	43.50	-7.12	56.19	-19.81	Peak	---	---
2	214.30	35.99	43.50	-7.51	55.26	-19.27	Peak	---	---
3	291.90	33.70	46.00	-12.30	49.93	-16.23	Peak	---	---
4	487.84	30.84	46.00	-15.16	42.56	-11.72	Peak	---	---
5	519.85	33.17	46.00	-12.83	44.27	-11.10	Peak	---	---
6	644.01	31.76	46.00	-14.24	40.64	-8.88	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>									

Modulation	11a	Test Freq. (MHz)	5805
Polarization	Vertical		

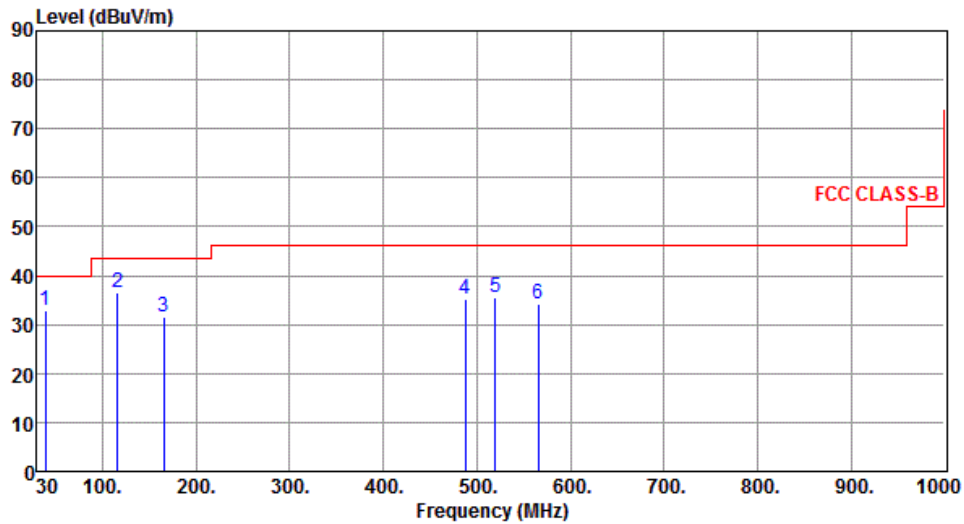

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.73	33.02	40.00	-6.98	50.34	-17.32	Peak	---	---
2	116.33	36.66	43.50	-6.84	56.62	-19.96	Peak	---	---
3	165.80	31.43	43.50	-12.07	48.63	-17.20	Peak	---	---
4	487.84	35.10	46.00	-10.90	46.82	-11.72	Peak	---	---
5	519.85	35.63	46.00	-10.37	46.73	-11.10	Peak	---	---
6	565.44	34.13	46.00	-11.87	44.23	-10.10	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==